

ARTICLE INFO

Received : October 19,2021

Revised : February 16,2022

Accepted : April 16,2022

CT&F - Ciencia, Tecnología y Futuro Vol 12, Num 1 June 2022, pages 69 - 83

DOI : <https://doi.org/10.29047/01225383.396>



NUMERICAL MODELING OF OIL SPILLS IN THE GULF OF MORROSQUILLO, COLOMBIAN CARIBBEAN

■ MODELACIÓN NUMÉRICA DE DERRAMES DE HIDROCARBUROS EN EL GOLFO DE MORROSQUILLO, CARIBE COLOMBIANO

Andrea Devis-Morales¹, Efraín Rodríguez-Rubio² and Daniel Rincón-Martínez²

ABSTRACT

This study encompasses the analysis of oil spills occurred in the Gulf of Morrosquillo during the loading procedures of oil tankers in the Coveñas maritime Terminal, by means of numerical simulation experiments of the trajectories and weathering processes of oil spilled, which occurred under specific wind, waves, and ocean currents conditions. A three-dimensional (3D) modelling system, OpenOil, which is part of the open-source OpenDrift trajectory framework was used to simulate two contingencies occurred in July and August 2014. During each event, different volumes of Vasconia crude oil spilled on the sea surface were simulated. The resulting slicks were subject to wind drift, Stokes drift from wave forcing, and ocean currents transporting the oil spilled towards the coast. Oil weathering effects (evaporation, emulsification, and biodegradation) are included in the analysis. To calculate weathering of the oil, OpenOil interfaces with the latest version of the open source ADIOS oil library. It should be noted that meteorological and ocean conditions contribute to the oil pathways that in both periods forced the oil slick towards the central coast of the Gulf. The wind speed is an important factor contributing to the rapid evaporation rates of the oil spilled in the warm waters of the Caribbean Sea; hence, allowing a gradual increase of the water fraction, which could lead to the formation of tar balls found in the affected coasts in the areas simulated by the model. The implementation of OpenOil to predict the oil fate and weathering processes in the Colombian basin prove to be a valuable tool that should be used in this maritime terminal to improve planning and preparedness in case of an oil spill. The simulations could be enhanced with higher resolution databases.

RESUMEN

Este estudio comprende el análisis de los derrames de hidrocarburos ocurridos en el Golfo de Morrosquillo durante los procedimientos de carga de buques petroleros en el Terminal Marítimo de Coveñas, mediante la simulación numérica de las trayectorias y procesos de envejecimiento del crudo derramado, los cuales ocurrieron bajo condiciones específicas de viento, oleaje y corrientes oceánicas. Se utilizó un sistema de modelado tridimensional (3D), OpenOil, que forma parte del OpenDrift, de código abierto, para simular dos contingencias que ocurrieron en julio y agosto de 2014. Durante cada evento se simuló diferentes volúmenes de crudo Vasconia derramado en la superficie del mar. Las manchas resultantes están sujetas a la deriva del viento, la deriva de Stokes por la fuerza de las olas y las corrientes oceánicas que transportan el crudo derramado hacia la costa. Se incluye en el análisis los efectos del intemperismo o meteorización en la calidad del crudo (evaporación, emulsificación y biodegradación). Para calcular el envejecimiento del petróleo, OpenOil interactúa con la última versión de la biblioteca de hidrocarburos ADIOS de código abierto. Se encontró que las condiciones meteorológicas y oceánicas contribuyen con el comportamiento de la mancha de crudo, que durante estos dos períodos forzaron la trayectoria de la mancha hacia la costa central del Golfo. La velocidad del viento es un factor importante que contribuye a las rápidas tasas de evaporación del petróleo derramado en las cálidas aguas del mar Caribe, lo que permite un aumento gradual de la fracción de agua, que podría conducir a la formación de bolas de alquitrán que se encontraron en las costas afectadas en las áreas que fueron simuladas por el modelo. La implementación del OpenOil para predecir el destino del petróleo y los procesos de envejecimiento en la cuenca colombiana resulta ser una valiosa herramienta que debe utilizarse en esta terminal marítima para mejorar la planificación y preparación en caso de un derrame de petróleo en el Golfo de Morrosquillo. Las simulaciones obtenidas podrían mejorarse con el uso de bases de datos de más alta resolución.

KEYWORDS / PALABRAS CLAVE

Oil spill modelling | Caribbean Sea | fate of the oil spilled | oil weathering OpenOil.

Modelación de derrame de petróleo | Mar Caribe | Destino | Mancha de crudo | Envejecimiento del crudo | OpenOil.

AFFILIATION

¹ TIP, Piedecuesta, Colombia
² Ecopetrol-Instituto Colombiano del Petróleo, km 7 vía a Piedecuesta -Bucaramanga, C.P.681011. Piedecuesta, Colombia
email: admoceanologa@gmail.com

1. INTRODUCTION

Offshore oil production and tanker transportation has increased since the 90s due to worldwide demand, and reduction of onshore reserves. These activities are associated to high risk as oil could be spilled accidentally into the ocean and, in certain situations, cause environmental, social, and economic impacts (Keramea *et al.* [1]). Oil spills are relatively common, and they occur in many ways, including natural releases. Most of them are small and occur, for instance, while refueling a ship or from oil leaks in transportation tankers. Although small, these spills can still cause damage, especially if they reach sensitive environments like beaches, mangroves, and wetlands. Large oil spills are dangerous disasters. These tend to occur during oil drilling, accidental collision, or sinking of oil tankers, and failure in pipelines and oil rigs. Consequences for the ecosystems and national and private economies can last for decades (Singh *et al.* [2]).

Singh *et al.* [2] prepared a map of potential oil spill risk for the Caribbean, pointing out that approximately 83% of the total area is exposed to some level of risk due to oil spills. Moreover, their quantitative analysis shows, in terms of crude oil tanker transport, that the islands, and Central/South American countries Exclusive Economic Zones (EEZs) are areas at moderate to high levels of risk. For oil products transport, the islands EEZs are generally at low risk levels, while South American countries are at low to high risk. The area between Colombia and Jamaica require close attention, as there is very high risk for pollution from the transport of crude oil.

In the Colombian coastal area over the Caribbean Sea, particularly in the Gulf of Morrosquillo, minor oil spill incidents have often been reported in the past. Based on reviewing national news and reports from environmental and maritime authorities, at least 9 oil spill incidents have been reported in this coastal area during the past 20 years (Table 1).

Most of the reports and information regarding the environmental and socioeconomic impacts of these incidents coincided that the established contingency operations designed to control the spills must be improved, to achieve better response after an oil spill initiated. This situation could be improved by means of numerical models which can be used for operational purposes.

2. OIL SPILLS BACKGROUND

The behaviour of an oil spill in the marine environment depends on a series of physical, chemical, and biological processes that are largely determined by the properties of the leaked oil, the hydrometeorological conditions (wave, winds, currents, solar radiation, sea water properties, etc.), and the characteristics of the release into the aquatic environment (instantaneous/continuous, surface/deep-water). From the moment the oil spreads over the seawater, oil properties (density, viscosity, etc.) change. This process, called oil weathering, refers to the changes that occur to oil as it stays in the environment. After the oil is released, it undergoes a wide variety of physical, chemical, and biological processes that begin to transform the oil almost immediately. [1].

In general, weathering processes can be analyzed in two different time-response windows. First, processes such as spreading, evaporation, dissolution, dispersion, and emulsification are rapidly

Table 1. Review of oil spill contingencies that occurred in the Gulf of Morrosquillo from 1992 to 2021

Date	Contingency report
January 1992	Approximately, 8 barrels of oil were spilled during the charging operation of the Ayda oil tanker.
October 1992	Approximately, 5 barrels of oil were spilled during the charging operation of the San José Trade oil tanker.
February 1993	40 barrels of oil were spilled during the charging operation of an oil tanker.
May 1995	Two oil spills in the same week. The largest one was 50 barrels, which occurred during the charging operations of the Trinidad Sea oil tanker.
May 1998	Oil pipeline breaking caused pollution to coastal mangroves. Reports varied in the amount of oil spilled (8 or 200 barrels).
July 2014	At TLU-2 monobuoy, during charging operations of oil tanker BT Eurochampion, due to strong winds, approximately 69 barrels were spilled.
August 2014	At TLU-1, the oil tanker Energy Challenger tanker caused the accidental leak of ballast water and oil (approximately 50 barrels).
October 2017	During the charging operations of an oil tanker, around 14 barrels of crude were spilled at the TLU-2
April 2021	Emergency occurred during the maintenance operations of the TLU-2 monobuoy. The volume of the oil spilled was not reported.

To efficiently predict the trajectory and fate of hydrocarbon spills occurring at the sea surface, we simulated the movement, evolution and weathering processes of the floating chemicals released during two documented oil spills that occurred in the Maritime Oil Terminal of Coveñas. The oil spill model applied in this study can be used either in hindcast mode, capable of tracing the source of a spill, or in forecast mode, predicting the path, the horizontal dispersion, and the mass balance, assisting in this way to both contingency planners and pollution response teams during real-time crisis management.

occurring (within hours), and have immediate effects on the oil slick. Second, sedimentation, biodegradation and photo-oxidation occur more slowly (within months) and comprise the long-term mechanisms for the breakdown of hydrocarbons in the environment. Sedimentation, stranding, turbulent mixing, dispersion, and resurfacing are important processes, under distinct environmental conditions [1].

Spreading refers to the creation of a thin film that expands over the sea surface, as soon as oil is being released due to mechanical forces. Gravity and surface tension are the main forces acting in favour of spreading, while inertial and viscous forces are acting against it. Therefore, oil slick spreading occurs even in the absence of currents or deformations caused by wind. The spreading rate depends on the sea surface temperature (SST), oil viscosity, and density.

The horizontal transport of oil spilled at sea is largely determined by ocean currents, waves, and winds. Ocean currents and the wave-induced Stokes drift vary with depth, and the wind drag is commonly assumed to only affect the surface slick (Reed *et al.* [6]; Drivdal *et al.* [7]; Röhrs *et al.* [8]). Advanced oil spreading algorithms consider processes such as wind shear stresses, turbulent mixing, and wave breaking and shear spreading. Spreading is usually a process with specific model limitations, as it depends on oil characteristics and ocean conditions, and existing algorithms approximate only partially the actual surface area of real spills [1].

Horizontal transport includes both spreading and advection, which depend on currents, waves, and winds. Vertical transport involves vertical dispersion and wave entrainment, turbulent mixing, and resurfacing. The common modelling technique, employed by nearly all oil spill models is the Lagrangian approach, in which oil particles experience an advective displacement according to currents, wind and Stokes drift, and a diffusive displacement given by a random walk model.

Natural vertical dispersion is another significant process in the first week after an oil spill. This process deals with the amount of crude oil that migrates towards the water column in the form of small droplets because of turbulence, mostly produced by breaking waves. This process can have a significant effect on light crude oils under high turbulence. After evaporation, dispersion is the process with the most significant impact on the extent of time that the oil slick remains on the surface. Dispersion, however, does not produce changes in the physicochemical properties of the spill, as oil droplets migrating to the water column have the same chemical composition as the surface oil (Ramírez-Hernández, 2014 [9]).

Evaporation is an important weathering process, which removes the volatile elements of the oil to the atmosphere within a few hours of the spill, leading to the reduction of oil toxicity in the marine environment. In the first few days after an oil spill, the light, medium, and heavy crude oils can evaporate respectively up to 75%, 40% and 10% from their original mass (ASCE [10]). Simultaneously, the viscosity of the remaining slick increases leading to severe physical and chemical effects on the marine ecosystems. The most widely used analytical method to assess the rate of evaporation is based on the work of Stiver and Mackay [11]. The authors assessed oil evaporation by means of a mass-transfer coefficient, expressed as function of wind speed, oil spill coverage, oil vapor pressure, and sea surface temperature.

Emulsification is the process by which water is being mixed into the oil. This occurs when the water uptake increases. As the water fraction increased, the emulsion stability also increases. Note that the mass of the oil is the mass of pure oil. The mass of oil emulsion (oil containing entrained water droplets) can be calculated as: $\text{mass oil} / (1 - \text{water fraction})$. In general, water fraction = 0 means pure oil; water fraction = 0.5 means mixture of 50% oil and 50% water, and water fraction = 0.9 (which is maximum) means 10% oil and 90% water (Dagestad *et al.* [12]).

This water-in-oil emulsion in the form of suspended small droplets is often referred to as mousse. It occurs due to wave breaking, inducing sea surface turbulence, while oil composition, temperature, and viscosity play a significant role in the process (Mishra *et al.* [13]). The main effect of emulsification is that it creates an emulsion of considerably increased viscosity, compared to the oil initially spilled, resulting in serious implications for treatment methods. Another important negative effect of emulsification is that it increases the

volume of the slick; this means that the clean-up costs are greatly increased.

Thus, emulsification is a process with specific model limitations and a crucial role on the impact assessment and response in oil spill modelling. A simple emulsification algorithm has been developed by Mackay *et al.* [14]. This model assumes that the rate of water uptake by the oil slick follows a first order kinetics with respect to the ratio of the current and the maximum water content. This rate law involves variables as wind speed, the fraction of water in the crude and the maximum water content that can support and stabilize the oil slick [9].

Photo-oxidation, biodegradation, and sedimentation are processes that occur in a later stage of a spill and are considered unimportant over the first days of a spill but become visible after a week or more. These are longer term processes that will determine the fate of the oil spilled [1]. Oxidation occurs when oil under the influence of the sunlight generates polar, water soluble, oxygenated compounds, generating tar balls that can accumulate in bottom sediments or along the coast. Even though this process is very slow, and it is not usually included in modern oil spill response models, under high UV light exposure, it can be fast, thus contributing to emulsification (Ward *et al.* [15]).

Biodegradation of oil by organisms is one of the natural processes that can attenuate the environmental effects of marine oil spills in the long term. The biodegradation rate depends on the type of hydrocarbon, temperature, species of marine micro-organisms, and availability of oxygen and nutrients. Biodegradation was generally considered a long-term oil weathering process, having a significant impact only after the first seven days of a spill and with time scales reaching up to several months; however, under specific conditions, it can become a significant process at shorter time scales, within the first week of an oil spill [15].

Sedimentation of oil droplets occurs because of three processes: increased density of the entrained oil and surface slicks due to weathering processes; incorporation into marine snow by means of zooplankton faecal pellets, or oil adherence or flocculation and agglomeration with suspended particulate matter (SPM) aggregates. This process causes several impacts on the marine environment, so it is material for biological impact analysis. Due to knowledge gaps in properly expressing the detailed dynamics of sedimentation in a quantitative parameterization scheme, this process has not been incorporated in oil spill models [1].

3. OIL SPILL MODELLING

Since 1960s, numerous oil spill models have been developed aimed at predicting the trajectory and fate of hydrocarbon spills occurring at the sea surface and the water column. These models, developed by various organizations, companies, and researchers, vary in complexity, applicability to location, and ease of use. The main inputs in each case are not only oil spill data, such as the type of oil and the initial location of spillage, but also metocean variables, such as the three-dimensional flow field, sea temperature, salinity and density profiles, atmospheric winds, and bathymetry, which may be obtained from different operational oceanographic forecasting systems available worldwide. A critical review of the state-of-the-art of oil spill models has been presented by Keramea *et al.* [1].

After a comparative assessment of the available models focused on supporting operational response to marine oil spill, we selected

the oil drift module OpenOil, a 3D oil spill transport and fate model, which is based on the open source, Python-based, trajectory framework of OpenDrift ([8]; [12]). This system has been used by the Norwegian Meteorological Institute (MET Norway) for operational purposes as an oil spill contingency and search and rescue model, and for drifter and oil slick observations in the North Sea, being widely used by the scientific community in several oceanic regions (e.g., Jones *et al.* [16]; Hole *et al.* [17]; Androulidakis *et al.* [18]; Brekke *et al.* [19]; Hole *et al.* [20]).

This model integrates algorithms with several physical processes, such as wave entrainment of oil (Li *et al.* [21]), vertical mixing by virtue of oceanic turbulence [21; Visser, [22]), resurfacing of oil due to buoyancy (Tklich and Chan, [23]), and emulsification of oil properties [21]. Resurfacing is parameterized based on oil density and droplet size by means of Stokes Law, and, therefore, the model's physics are very sensitive to the specification of the oil droplet size distribution (Hole *et al.* [17, 24]). The oil properties in OpenOil are obtained from the ADIOS Oil Library [25], which is also open source, written in Python, and containing measured physical properties of almost 1000 oil types across the world [8].

The OpenOil model also supports oil spills back-tracking that simulates reverse scenarios to predict where an oil spill may have originated from, to investigate a spill of unknown origin, or for hydrocarbon exploration applications. As for oil transport and weathering processes, this model includes all basic processes such as advection, spreading, evaporation, dispersion, entrainment, diffusion, evaporation, biodegradation, and emulsification, following the Mackay's modelling approach for emulsification parameterization. A relatively sophisticated natural dispersion algorithm is included in OpenOil, principally computed via vertical mixing approach in combination with wave-breaking entrainment, and the option of different droplet size-distribution [8].

OpenOil includes parameterization of the oil weathering processes that are most relevant on timescale of hours to days, i.e., evaporation and emulsification. Dispersion is not treated separately in OpenOil because it is explicitly calculated by the vertical mixing scheme together with wave breaking entrainment, and droplet size distributions. The oil weathering calculation is based on the NOAA-ERR-ERD OilLibrary package, which is installed as a dependency. The code for evaporation and emulsification in OpenOil is taken from the NOAA PyGnome code and adapted to the OpenDrift architecture. The biodegradation process has been incorporated into National Oceanic and Atmospheric Administration (NOAA)'s GNOME oil spill model, by including a new biodegradation algorithm, which is dependent on the surface area of droplets (Thrift-Viveros *et al.* [26]).

Oil properties are obtained from the open source ADIOS oil database developed by NOAA [25]. This database is accompanied by a software library (written in Python, like OpenDrift) of chemistry and weathering algorithms, which are used to calculate the evaporation and emulsification of a given oil type.

The rate of evaporation varies strongly among various oil types and depends on the wind speed. Some oil types may be completely evaporated within a few hours, whereas others do not evaporate at all. More typically, 20%-40% of the oil (the lighter components) is evaporated within the first 6 to 12 hours. The rate of evaporation follows the Stiver and Mackay [11] approximation. This parameterization has been included in the ADIOS model (Lehr *et al.* [27]; Overstreet *et al.* [28]), developed by NOAA.

In addition to the removal of oil components from the sea surface, evaporation may also play an important role in the onset of emulsification, which has a very strong impact on oil viscosity. While some oils do not form water-in-oil emulsions, other oils only start to emulsify after some of the components have evaporated. The water content in the emulsion may then quickly rise from 0% at onset of emulsification, to a maximum level that is typically 80%-90% for most oil types in the ADIOS database [25]. The density of the emulsion thus gradually approaches that of water, but more importantly for transport and fate modelling, as well as clean-up operations, the viscosity may increase by several orders of magnitude [8].

4. METHODS

STUDY CASE 1

One of the best documented events in the Colombian margin took place on 20 July 2014, when strong and sudden winds began to affect the charging operation of an oil tanker (BT Eurochampion 2004) at around 20:30 hours at the Tanker Loading Unit, (TLU)-2, located at 9.493° N, 75.776° W, at Coveñas (Figure 1). Due to the sudden extreme weather event, the company Oleoducto Central S.A. (OCENSA), in charge of the operations, authorized the movement of the tanker to the anchorage area to avoid a collapse against the monobuoy. Despite having suspended the loading operations, the intensity of the winds produced an abrupt and sudden tension in the mooring mechanisms of the tanker, causing the leakage of crude oil that was inside one of the transfer hoses. In this event, spilling of around 42 to 69 barrels of hydrocarbons was reported by the environmental agency of Colombia (ANLA [3]).

Once the climatic event ended, the next day (21 July 2014), OCENSA deployed personnel to secure and protect the monobuoy. The inspection concluded that there was no presence of crude oil around the terminal. The company and the Coveñas Port Authority made a helicopter overflight over the Gulf of Morrosquillo, observing an oil slick that moved in a north-northeast direction towards Palma Island. After confirming the location of the oil spill to the north from its origin, OCENSA immediately deployed the personnel, resources, vessels, and equipment required for in the contingency plan, which began with the installation of direct containment barrels at the point of detection of the slick. During the next two days, new overflights were made to locate the slick and conduct new spill containment measures.

On 22 July, new aerial inspections in the morning hours evidenced that the slick had changed its main direction, moving southeast, towards the Tolu municipality. The slick was observed near the El Francés sector, to the northeast of its original spill location. The same day in the afternoon, the community evidenced pollution to the north of El Francés sector, where numerous balls of solid crude, organic matter, and sediments were found.

The following days, these balls were also observed further north, up to the Berrugas sector, on the northern coast of the Gulf of Morrosquillo. On 23 July, tar balls were observed in the Zaragocilla sector. The next day (24 July), the cleaning operation of these tar balls continued in the beaches of Guacamaya and El Francés.

STUDY CASE 2

Another contingency occurred on 21 August 2014, when crude oil was being loaded to the Energy Challenger tanker in the TLU-1 monobuoy (9.496° N; 75.737° W), operated by Ecopetrol. The alarm was raised due to the presence of crude oil in the seawater.

On 22 August, a commission from the Regional Autonomous Corporations (CVS and CARSUCRE) along with Ecopetrol and OCENSA evaluated the situation and determined that a leak (fissure) in the ballast water system that is also filled with hydrocarbon was the cause of the spill of around 20 to 50 barrels of oil (CVS [5]). Through the overflight carried out later that day, the magnitude of the oil slick and its proximity to the beaches were evidenced. According to information from Ecopetrol officials, the slick was first observed approximately 3 km from the beaches of El Porvenir in the municipality of San Antero (near Coveñas). There were no further aircraft reports the following days.

Late on 23 August and the following day, there was plenty evidence of contamination on the beaches of Guerrero and Guacamaya (Tolú Municipality), both located a few kilometres to the north of El Francés sector. On 25 August, the local authorities declared public calamity, and on 27 August, these beaches were officially closed given that the oil slick detected was causing negative impacts on the tourism sector of the Gulf of Morrosquillo, as well as on small-scale fishing [4].

CONFIGURATION OF THE SIMULATIONS WITH OPENOIL

The OpenOil model version 1.5.3 was used to simulate oil spill trajectories in the Colombian Caribbean. Regarding the environmental input data, OpenDrift provides flexibility to use various configurations. In this study, oil particles are advected horizontally by ocean currents provided by the global ocean sea physical forecasting product PHY_001_024 of the Copernicus Marine Environment Monitoring Service (CMEMS), covering the Gulf of Morrosquillo at 0.083° (~9 km) horizontal resolution, with 50 geopotential vertical levels at hourly time steps. This analysis can be downloaded at <http://marine.copernicus.eu/>. The global and forecasting system uses version 3.1 of the NEMO ocean model. The physical configuration is based on the tripolar ORCA12 grid type. The 50-level vertical discretization retained for this system has a decreasing resolution from 1m at the surface to 450 m at the bottom, and 22 levels within the upper 100 m. Details of this product are described in Lellouche *et al.* [29].

Wind data were obtained from the global ERA-5 reanalysis provided by the European Center for Medium Range Weather Forecasts (ECMWF), which is hourly information at 0.25° (~27 km). ERA-5 is produced using 4D-Var data assimilation and model forecasts in CY41R2 of the ECMWF Integrated Forecast System (IFS). The reanalysis combines model data with observations from across the world into a globally complete and consistent dataset using the laws of physics. Data can be downloaded from <https://cds.climate.copernicus.eu/>. Details of this database are presented by Hersbach *et al.* [30].

Wave data is from the Marine Copernicus, global reanalysis WAV_001_032 (WAVERYS), which is 3-hour time step information at 0.2° (~22 km). The core of WAVERYS is based on the MFWAM model,

a third-generation wave model that calculates the wave spectrum, (i.e., the distribution of sea state energy in frequency and direction) on a 1/5° irregular grid. Average wave quantities derived from this wave spectrum, such as the SWH (significant wave height) or the average wave period are delivered on a regular 1/5° grid with a 3-hour time step. WAVERYS considers oceanic currents from the GLORYS12 physical ocean reanalysis and assimilates significant wave height observed from historical altimetry missions and directional wave spectra from Sentinel 1 SAR from 2017 onwards. Variables used in the simulations are SWH and sea surface wave Stokes drift (u and v velocities). Detailed information of this dataset is presented by Law-Chune *et al.* [31]. The Stokes drift from surface gravity waves is treated separately in OpenOil and obtained from the wave model. Stokes drift below the surface is calculated from the surface Stokes drift using the parameterization provided by Breivik *et al.* [32].

It is important to highlight that it would be desirable to have meter-to-kilometre spatial resolution forcing fields, but these are unavailable in this basin. Also, there were no available measurements of metocean variables during the time these contingencies occurred. Hence, the lack in situ or modelled data of higher resolution is a limitation identified in this study.

The simulations are initiated with 5000 oil elements (super particles) seeded at the ocean surface within the area of the TLU locations at the exact time and date when the reported incidents started. Since no reports regarding the type of crude involved in the spills is available, we chose Vasconia oil properties, similar to the medium crudes produced in the different fields of Colombia. Given the initial volume of oil spilled at the sea surface, for the first event (~69 barrels), a radius of the initial oil slick of 800 m was selected, while in the second simulation (20 to 50 barrels) the radius around the initial position is 400 m. given the initial volume of oil spilled at the sea surface. Note that the radius is not an absolute boundary within which elements will be seeded, but a standard deviation of a normal distribution in space. Thus, about 68% elements will be seeded within this radius, with more elements near the center. By default, elements are seeded at the surface ($z=0$). Outputs are set every 10 minutes until the simulation ends, which occurs when all the oil particles are deposited on the seabed, or over the coastline. The configuration features and the initial metocean conditions used in each experiment are summarised in Table 2.

Table 2. Configuration features of the two oil spill simulations performed in the Gulf of Morrosquillo with OpenOil.

Configuration features	Study case 1	Study case 2
Initial date and time	20 July 2014, at 20:30 h	21 August 2014, at 22:00 h
Duration of the simulation before all particles stranded	56 hours	36 hours
Number of particles and oil spill radius	5000 particles, 800 m	5000 particles, 400 m
Oil type	Vasconia	Vasconia
Initial wind	Speed < 3 m s ⁻¹ with S/SE direction, followed by speeds >5 m s ⁻¹ towards the N/NE	Speed < 2 m s ⁻¹ with S/SE direction, followed by speeds ~5 m s ⁻¹ towards the N/NE
Initial Stoke drift	< 3 cm s ⁻¹ eastward	< 5 cm s ⁻¹ south-eastward
Initial currents	< 0,1 m s ⁻¹	< 0,35 m s ⁻¹

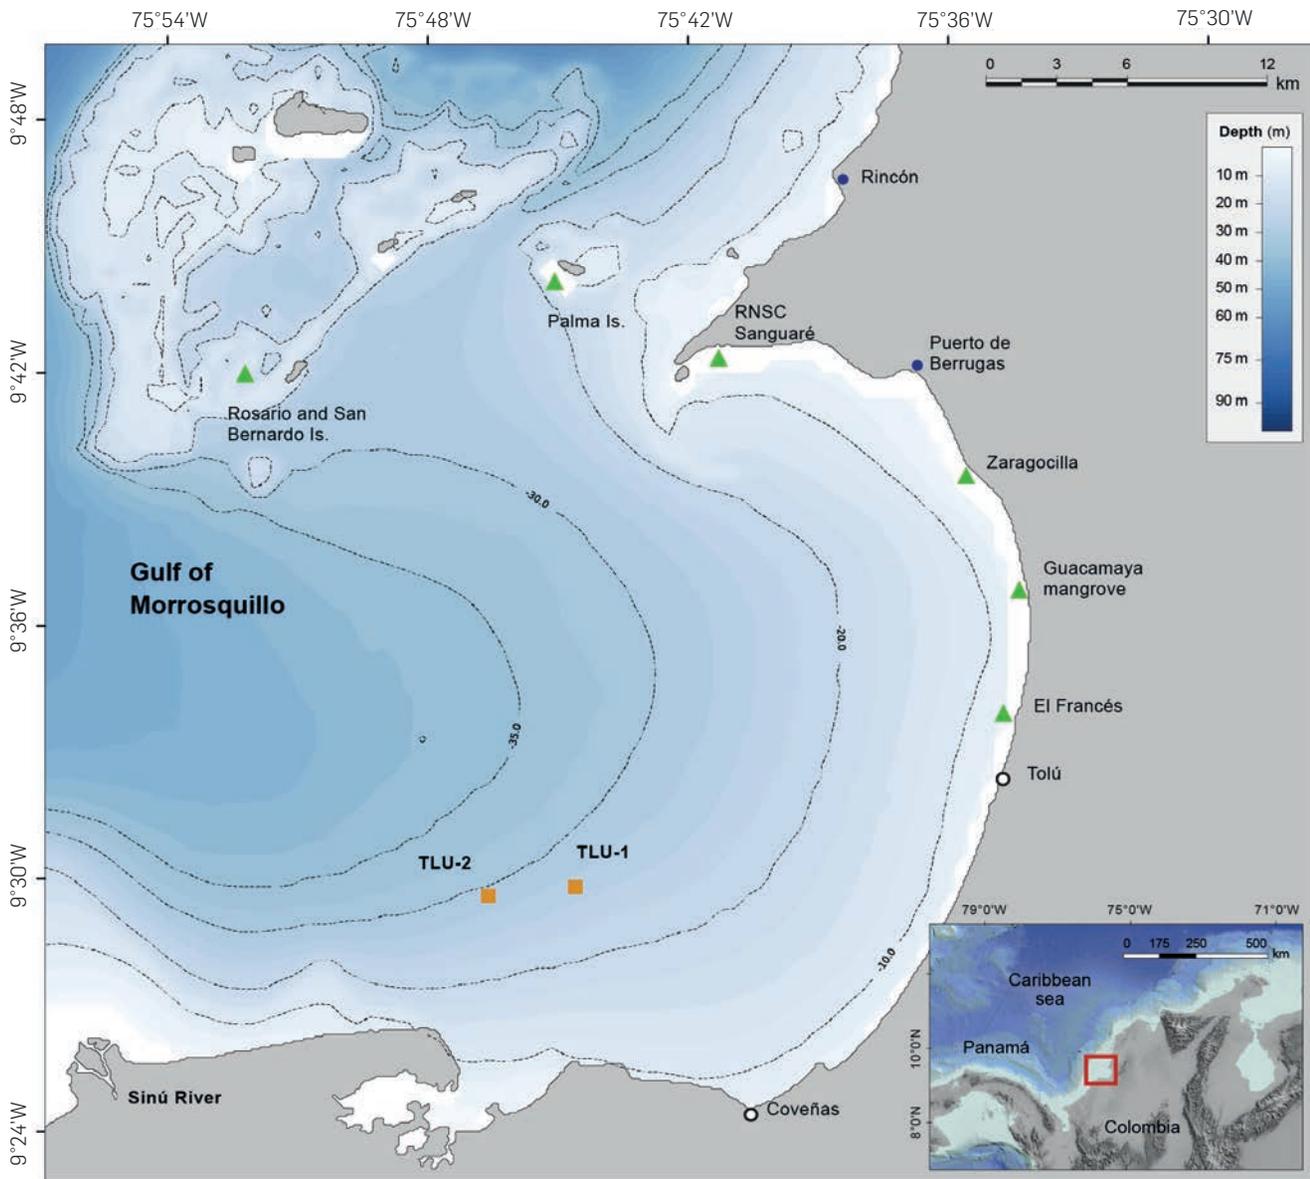


Figure 1. Gulf of Morrosquillo bathymetric map. The location of the Terminal Loading Units (TLU-1, TLU-2) of the Coveñas Oil Terminal is shown as full-orange squares. Location of the municipalities of Tolu and Coveñas (empty circles) and main beaches (full-green triangles) are also included. The regional context of the Gulf within the southwestern Colombian Caribbean is shown in the bottom right corner of the map.

5. RESULTS AND DISCUSSION

20 JULY 2014, OIL SPILL SIMULATION

METOCEAN CONDITIONS

The evaluation of the oil spill model outputs starts with the observation of the meteorologic and oceanographic (metocean) characteristics during the days the contingency occurred. These features that are used as inputs of the oil spill model are needed to understand prevailing conditions, and the main processes considered in the horizontal drift.

ERA-5 winds obtained from a location near the TLU-2 buoy show weak wind velocities ($< 3 \text{ m s}^{-1}$), and southward and south-eastward directions during the first hours of 20 July, followed by a north-eastward direction and the intensification of the speed ($> 5 \text{ m s}^{-1}$) during the afternoon hours (Figure 2A). The wind magnitudes from this reanalysis did not evidence the wind burst reported during the night, on 20 July, given that the reanalysis underestimates high wind speeds of short duration in this region (Devis-Morales *et al.* [33]). Winds at the time of the contingency (around 20:30 hrs) had a south-eastward direction, and the next day (21 July), the flow turned towards the north (northeast and northwest). During the following days, the winds tend to flow towards the south during the evening and morning hours, and towards the north during the afternoon hours.

Stokes drift (speed and direction) in the area when the contingency started followed the general wind patterns. Relatively small velocities ($<3 \text{ cm s}^{-1}$) were observed during the morning hours, and values increased during the evenings. At the time the event started on 20 July, the wave-driven flow had an eastward direction, and during the following hours switched towards the southeast and northeast (Figure 2B).

Surface currents on 20 July, flow towards the north-east during the hours prior and during the contingency (Figure 2C), with changes in the magnitude coinciding with changes in wind direction (Figure 2A). When the wind blows towards the southeast, ocean currents weaken, and when it flows towards the northeast, the currents strengthen in the same direction.

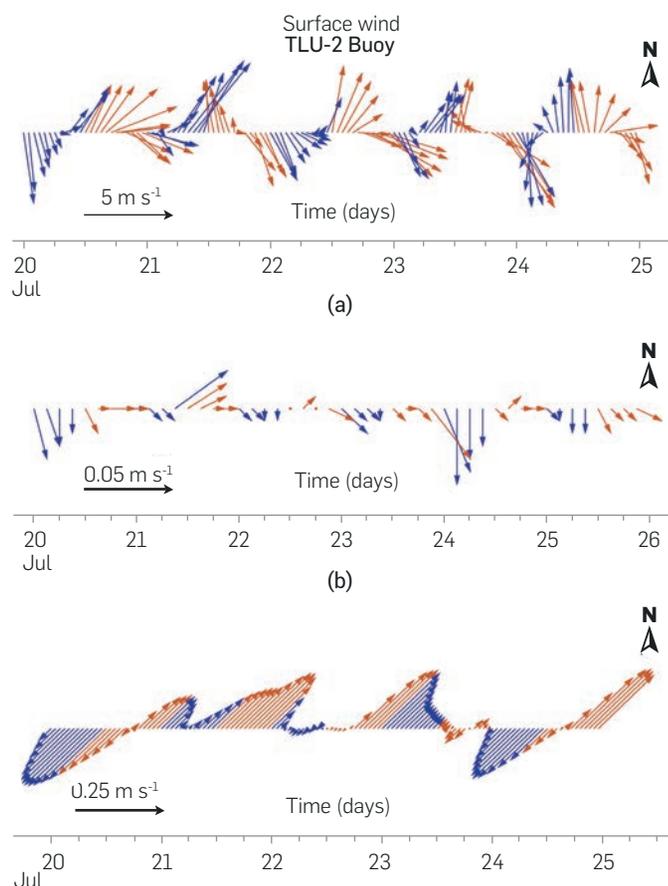


Figure 2. Time series of (A) magnitude and direction of the surface wind, (B) Stokes drift, and (C) surface currents from a location near the TLU-2 monobuoy during the first five days of July 2014 oil spill contingency. Blue (red) arrows represent the morning (afternoon) hours. Wind data are from ERA-5 reanalysis, wave data are from Wavery reanalysis and current data are from CMEEMS.

TRANSPORT AND FATE OF THE SLICK

The horizontal transport patterns of the oil slick clearly follow the wind and surface currents depicted in Figure 2A and 2C. The trajectory of the slick is advected towards the north during the first three hours of the simulation coincident with the direction of these forcing fields (Figure 3). Then, the particles started to move towards the east, and 24 hours later, the oil slick was advected

to the northeast of its original position. Finally, the oil followed a south-eastward direction until it reached the central coast of the Gulf, in the Tolú Municipality, 56 hours later. The simulation ended on 23 July, 04:30 hours, when all the oil slick reached the coastline (stranded particles).

The resulting trajectory differs from what was observed by the local authorities during the surveillance flights on 21 July. According to the reports, the oil slick moved further north, during the first 24 hours after the incident started, reaching the surrounding waters to the south of Palma Island (around 9.7°N) before advection occurring towards the southeast, towards the coast near the El Francés sector. The far north displacement of the slick was not well represented by the model given that the simulated slick advanced only up to 9.55°N . The differences encountered between air crafted observations and the simulation could be related to the horizontal resolution of the forcing fields (wind and waves) which is $\sim 25 \text{ km}$. Also, as pointed by Devis-Morales *et al.* [33], the winds could be underestimated in this area, leading to the observed differences in the horizontal transport and fate of the oil slick.

OIL WEATHERING

The resulting simulation is analysed in detail by evaluating the spatial and temporal evolution of the oil evaporation and the water fraction. At the end of the first 24 hours after the simulation started, nearly 65% of the hydrocarbon was evaporated on the borders, and nearly 61% in the inner area (Figure 4A). As the oil slick continued moving towards the coast of Tolú municipality, the evaporation increased reaching 66% near the coast, at the end of the simulation.

Evaporation rates resulting from this simulation are high and at first lead to interpret them as an overestimation. This has been previously discussed in detail by Ramírez Hernández [9], who developed an oil weathering model for Colombian crudes (MEUN). The author concludes that the evaporated fraction depends on wind velocities. For instance, with wind velocities above 5 m s^{-1} his weathering model for Vasconia oil tends to overestimate the evaporated fraction at the initial stages of evaporation (first 3 hours) but, with time (after the fifth hour), the difference between predictions and experimental data decreases. In the simulations performed in this study there were periods of high wind speeds; hence, it could be that the evaporation rates during the first hours of the simulations are overestimated. However, the emulsification of the crude oil is only possible when evaporation is large, thus, these rates are not excessively overestimated.

High evaporation values play an important role in the occurrence of emulsification, which has an impact on oil viscosity. In the case of the hydrocarbon spilled in this area, the slick reaches 74% of water content (fraction) when most of the oil (66%) has been evaporated. As discussed by Ramírez-Hernández [9] for Vasconia oil, these results represent the typical behaviour for oil emulsification, as it forms an emulsion with a water content of 70-90 % that becomes more stable as the evaporated fraction increases. As shown in Figure 4B, when simulation ends, the water fraction is nearly 75%, making emulsification possible.

These emulsions are referred to as "chocolate mousse" or "mousse", as they form a gelatinous emulsion of water and oil (Payne, 1982 [34]; Thingstad and Pengerud, 1983 [35]). This weathered emulsion then breaks into pieces, forming pelagic semisolid tar balls (Fingas and Fieldhouse, 2009 [36]). These balls were observed in the

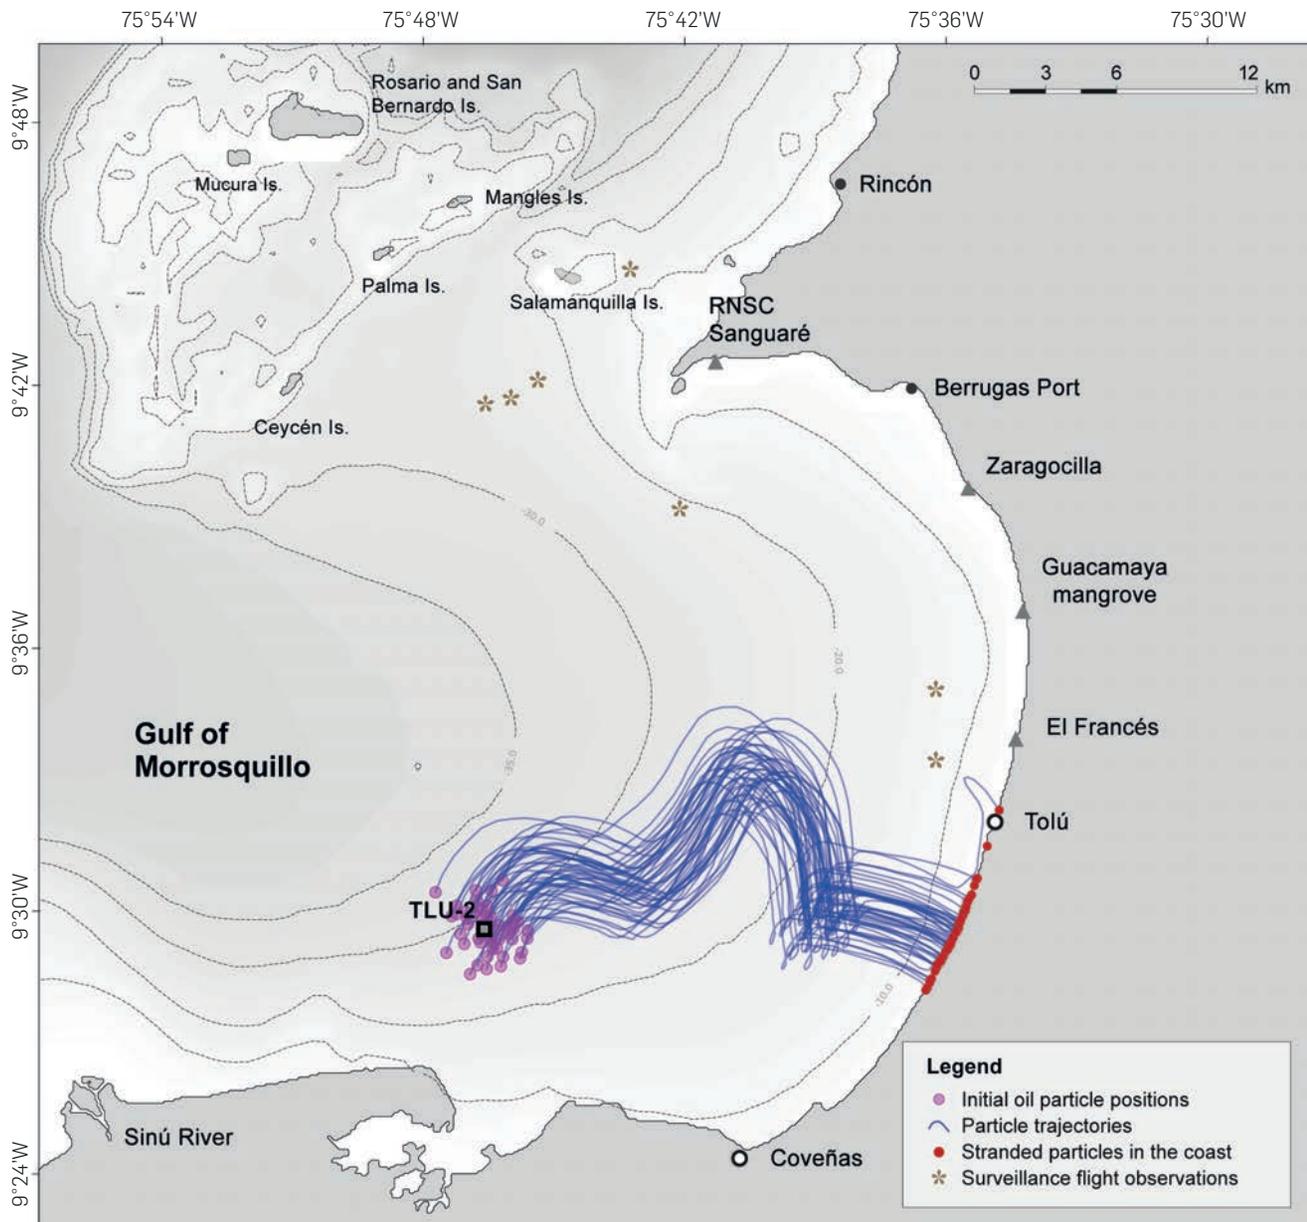


Figure 3. Oil drift simulation map starting at 20:30 h of 20 July 2014 and ending at 04:30 h of July 23, 2020. Location of TLU-2 (empty square), the initial oil particle positions representing the slick (magenta circles), the stranded particles in the coast (red circles) and particle trajectories (blue lines) are shown. Also, the position of the oil slick as reported from different surveillance flights in the area (stars) on 22 July are indicated (ANLA [3]).

evening of 22 July, arriving on the coast beaches of El Francés, municipality of Tolú. The following days these balls were also observed further north, as far as Berrugas beaches, municipality of San Onofre, around 20 km north of Tolú.

Geographical location of tar balls, far north from where the open oil simulation ends, apparently contradict our results. We interpreted this difference as a limitation of the OpenOil model, which does not solve the coastal transport processes of the slick given that the simulation ends once oil particles reach the coast or settle on the seabed. Given that longshore coastal currents had a northward direction 24 hours after the simulation started, it is possible that tar balls that first reached the Tolú coast were advected along the

coastline towards the north during the following days. The mass balance of the oil spilled on 20 July 2014, is shown in Figure 5. It evidences the rapid loss of the mass, during the first two hours after the contingency started (Figure 5A), because of the large evaporation (>50%) of the volatile fractions of the hydrocarbon. This process not only eliminates hydrocarbon from the sea surface to the atmosphere but is crucial in the changes the slick suffered in the next hours, given that the evaporation allows the gradual increase of the water fraction (Figure B), causing a large impact on the oil density (Figure 5C) and viscosity (Figure 5D).

The content of water in the emulsion changed rapidly from 0% at the start of the contingency to a maximum of 75% when it ended

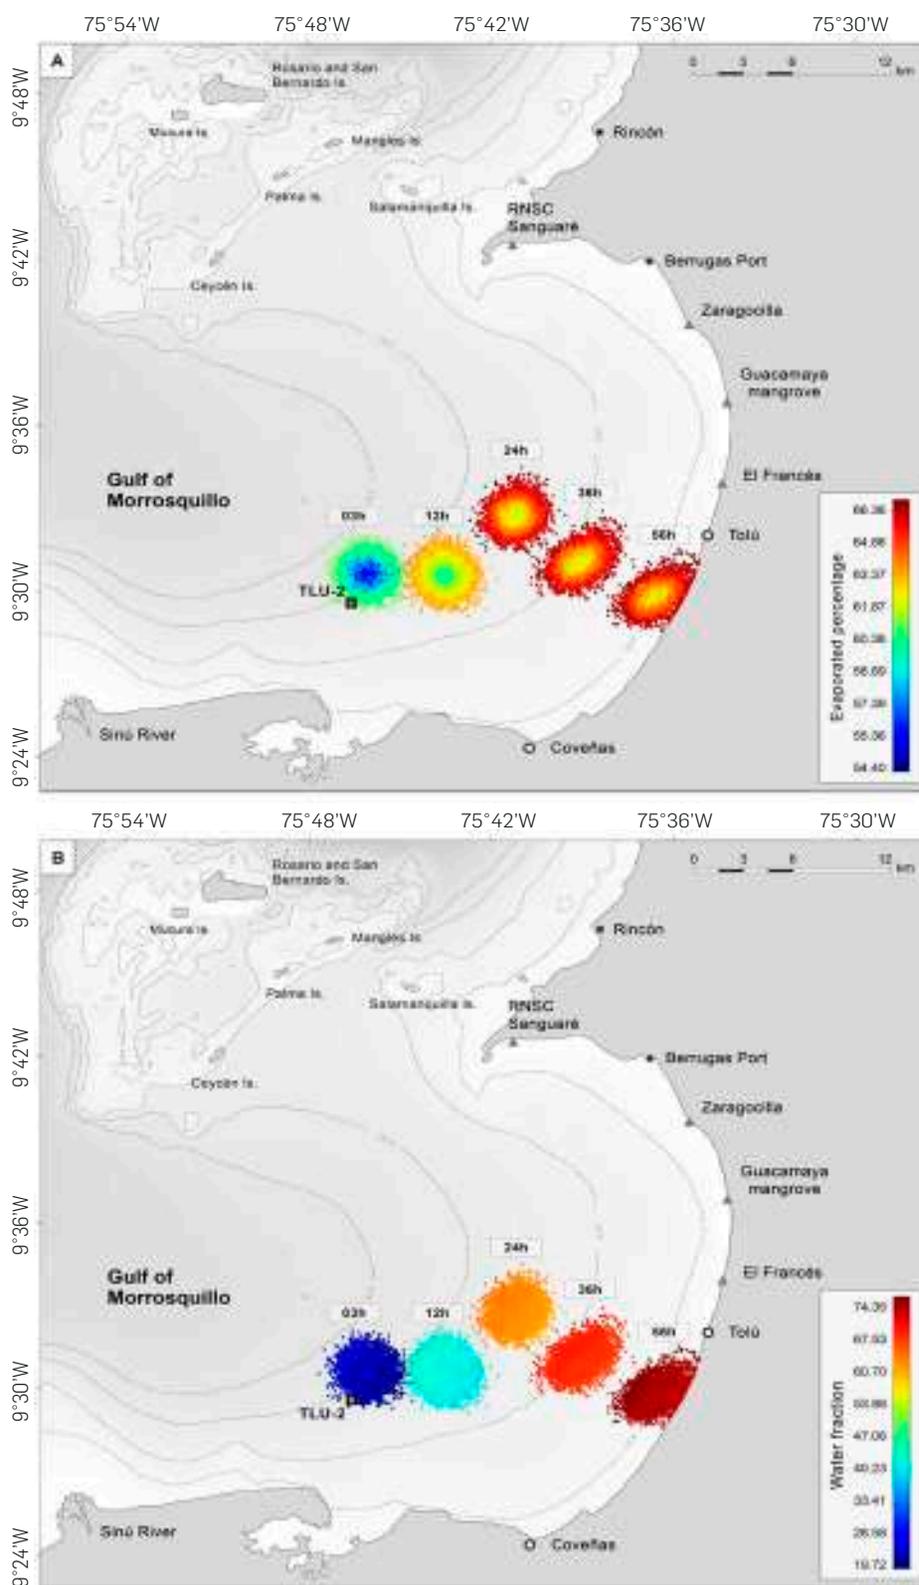


Figure 4. Evolution of (A) evaporated percentage and (B) water fraction within the oil slick. Simulation starting at 20:30 hrs of 20 July 2014, and ending at 04:30 hrs of 23 July, 2020, using 69 barrels of Vasconia oil spilled in the Gulf of Morrosquillo, in the location of the TLU-2 Coveñas Oil Terminal (square).

(Figure 4B and 5B). The density of the emulsion increased gradually to values near 950 kg m^{-3} (Figure 5C). Formation of TAR balls might also be supported by the fact that Vasconia crude forms a stable emulsion with a significant viscosity increase, once the evaporated fraction is over 15.5% [9]. That threshold is reached in one hour and that is why the viscosity increases just immediately after the spill started (Figure 5D).

Results obtained in this study matched the predictions of weathering for an oil spill of Vasconia crude oil with the MEUN model developed by Ramírez Hernández for the Caribbean Sea conditions [9]. Both simulations present a highly persistent behaviour of the crude on the surface, with a high evaporation fraction and less than 1% of dispersion because of the high viscosity produced by the stable water-in-oil emulsion it forms. The oil remaining on surface, after a spill of Vasconia, forms an emulsion with a water content that can be higher than 80%.

In this simulation the biodegraded mass is nearly zero for 56 hours (Figure 5A); hence, in this scenario there was no change of the total mass due to microbial degradation. Also, it was observed that the area of the oil slick remained relatively the same during the entire simulation. The horizontal spreading of the slick in this scenario was relatively small (Figure 5E) given that inertia and viscosity were the determinant mechanical forces working against the expansion of the

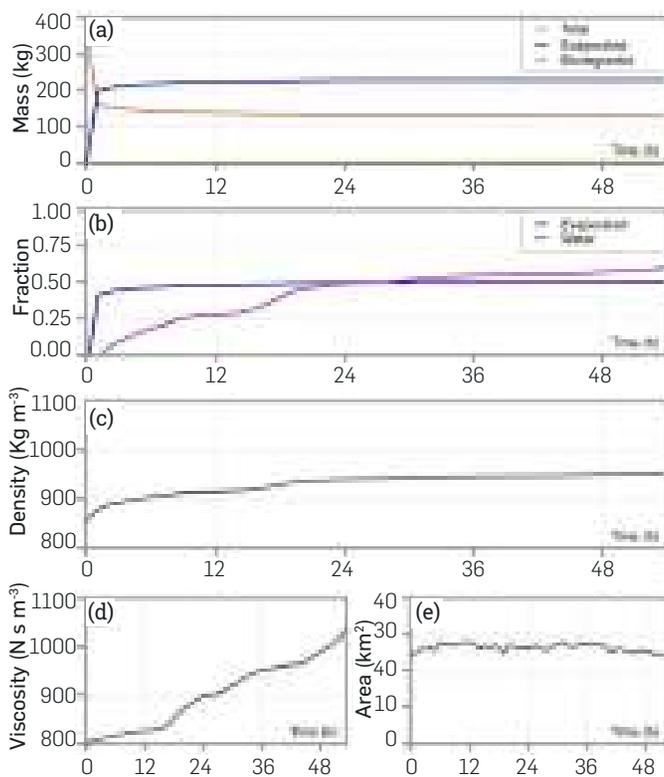


Figure 5. Mass balance of the Vasconia oil spill contingency that started on 20 July 2014, in the Gulf of Morrosquillo. It is shown the temporal evolution of (A) the total, evaporated and biodegraded mass (kg); (B) the evaporated and biodegraded fractions; (C) the density of the mass (kg m^{-3}), (D) the viscosity (N s m^{-2}), and (E) the area of the slick (km^2).

oil film on the sea surface.

21 AUGUST 2014, OIL SPILL SIMULATION

METOCEAN CONDITIONS

Metocean conditions during the contingency event are shown in Figure 6. At night, when the oil spill started (21 August, 22:00 hr), and next morning, winds had a south-eastward direction; then, there was a change in wind direction towards the northeast, which lasted the following days, with magnitudes around 5 m s^{-1} (Figure 6A). Stokes drift from surface waves observed during these days coincided with the wind direction, with maximum magnitudes of less than 5 cm s^{-1} (Figure 6B). Ocean surface currents in the area maintained a north-eastward direction during the entire contingency event, with very weak magnitudes (close to zero) when winds turned towards the south, and maximum velocities ($>0,35 \text{ m s}^{-1}$) in days two and three of the simulation (Figure 6C).

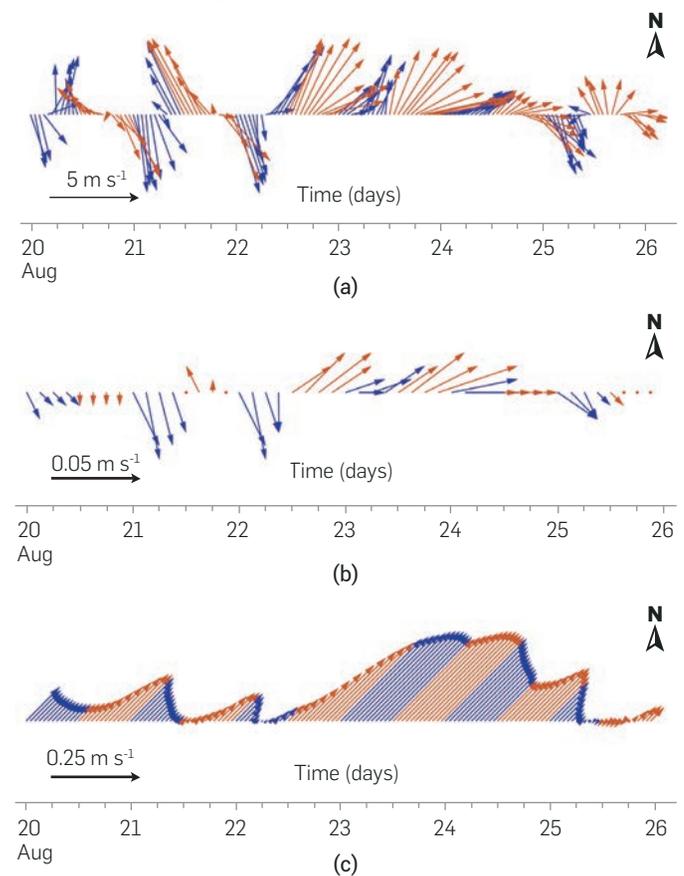


Figure 6. Time series of (A) magnitude and direction of the surface wind; (B) Stokes drift and (C) surface currents from a location near the TLU-1 monobuoy during the first six days on which the August 2014 oil spill contingency occurred. Blue (red) arrows represent the morning (afternoon) hours. Wind data are from ERA-5 reanalysis, wave data are from Wavery reanalysis, and current data are from CMEMS.

TRANSPORT AND FATE OF THE SLICK

The metocean conditions observed in the gulf favoured the oil slick to move northwards during the first three hours; then it was advected to the southeast, coincident with the change and strengthening of the wind direction (Figure 7). After 16-18 hours after the start of the simulation, the oil slick shifted its trajectory towards the north-east.

Finally, the oil particles moved rapidly towards the central coast of the Gulf of Morrosquillo, until the slick reached the northern sector of El Francés, and the beaches of Guacamaya and Zaragocilla at, ~36 hours after the contingency started (Figure 7). Part of the simulated trajectories are consistent with the reports from the local authorities that monitored the oil slick from aircrafts on 22 August, and the information from the tourist sector that observed oil pollution on the beaches on 23 August. Discrepancies with some surveillance flight observations could be related to the resolution of the forcing fields or the underestimation of the wind velocities from ERA-5. Nevertheless, from these results, it becomes evident that the combined effect of the wind, the Stokes drift and surface currents

in the same direction in day two were determinant in the rapid movement of the oil slick towards the northern coast of the Gulf.

OIL WEATHERING

The evolution of the evaporation and the water fraction within the oil is shown in Figure 8. It is observed that in the first three hours, 62% of the total mass was evaporated; after 24 hours, 78% of the crude oil was eliminated to the atmosphere, and 36 hours after the simulation started, 85% of the spill was evaporated (Fig 8A), inducing changes in the density and dynamic viscosity of the remaining mass, which, in turn, favoured the increase of the water fraction, from 4% during the first hours to 72% at the end of the simulation (Fig 8B).

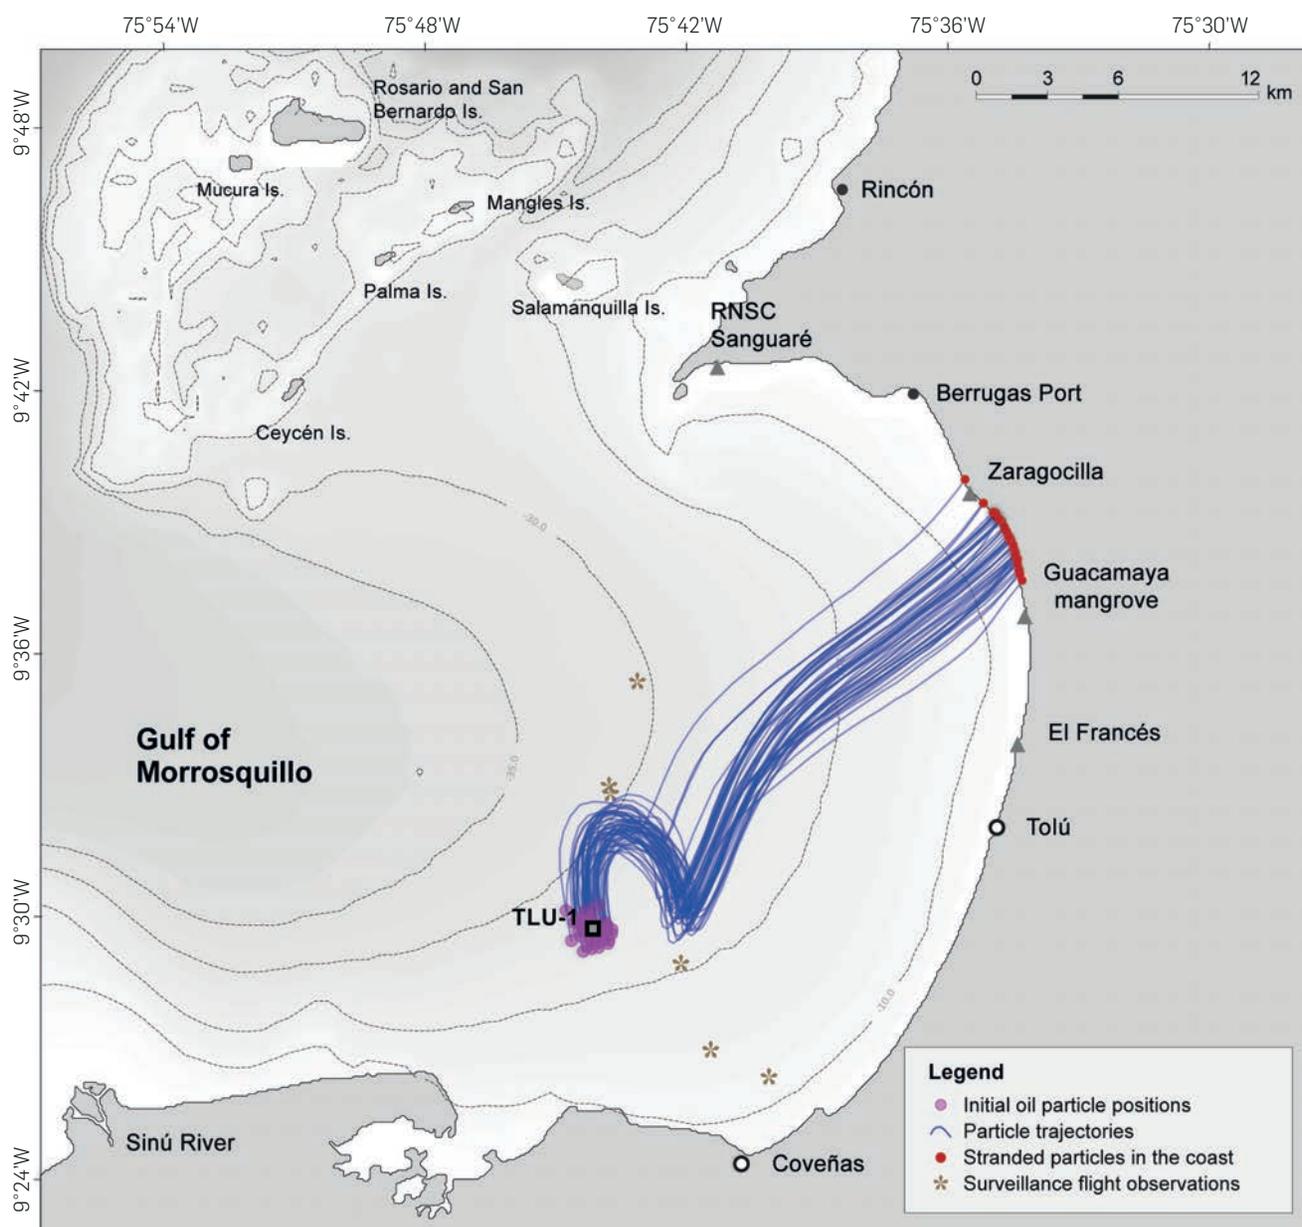


Figure 7. Oil drift simulation map starting at 22:00 h of 21 August 2014 and ending at 17:00 h of 23 August 2014. Location of TLU-1 (empty square), the initial oil particle positions, stranded particles in the coast (red circles), and particle trajectories (blue lines). Also, the position of the oil slick as reported from a surveillance flight of the area (stars) on 22 August is indicated.

During this contingency event, winds and currents were more intense than during the incident in July; hence, the evaporation rates were greater this month, allowing a rapid mixing between oil and ocean and the surfactant/stabilizing effect of certain compounds in the crude oil (mainly resins, asphaltenes and waxes), which facilitated the formation of water-oil-emulsions with up to 72% of water content.

The mass balance of the oil spilled in August 2014, is shown in Figure 9. In this event, the rapid decrease of the total mass due to evaporation is evident, which reached 75% in the first six hours (Figure 9A). As the evaporated fraction increased, this favoured the gradual increase of the water content (Figure 9B), and the density of the resulting mass, which increased to values close to 1000 kg m^{-3} (Figure 9C). Although the density increases, the slick remains superficial, increasing its viscosity (Figure 9D). With increasing evaporation and water content, the emulsion contributes significantly to the persistence of the slick, mainly due to the large increase in viscosity and thickness.

These weathering processes, together with persistent winds and currents favour horizontal spreading and, further, the increase of the oil spill area, which reached 60 km^2 at the end of the simulation (Figure 9E). Once the spilled started its advection on the sea surface, strong metocean conditions caused the increase of the horizontal spreading of the slick. The temporal evolution of the oil slick has been discussed by Fay (1971) [37], who concluded that after the first hours of a contingency event, the extension of the slick becomes more affected by the influence of wind, waves, and currents.

In this event it was also observed that biodegradation processes started to occur, being evident 12 hours after the oil was spilled (Figure 9A). Nevertheless, values were relatively small. The degradation rates depend on the oxygen and nutrients availability and the water temperature, along with the characteristics of the crude oil and the size of the droplets. The weathering processes cause the increase in the area available for biological activity, which favours the biodegradation process. The simulation ended after 35 hours, when all the particles were evaporated, biodegraded, or finally reached the coast and became inactive in the simulation.

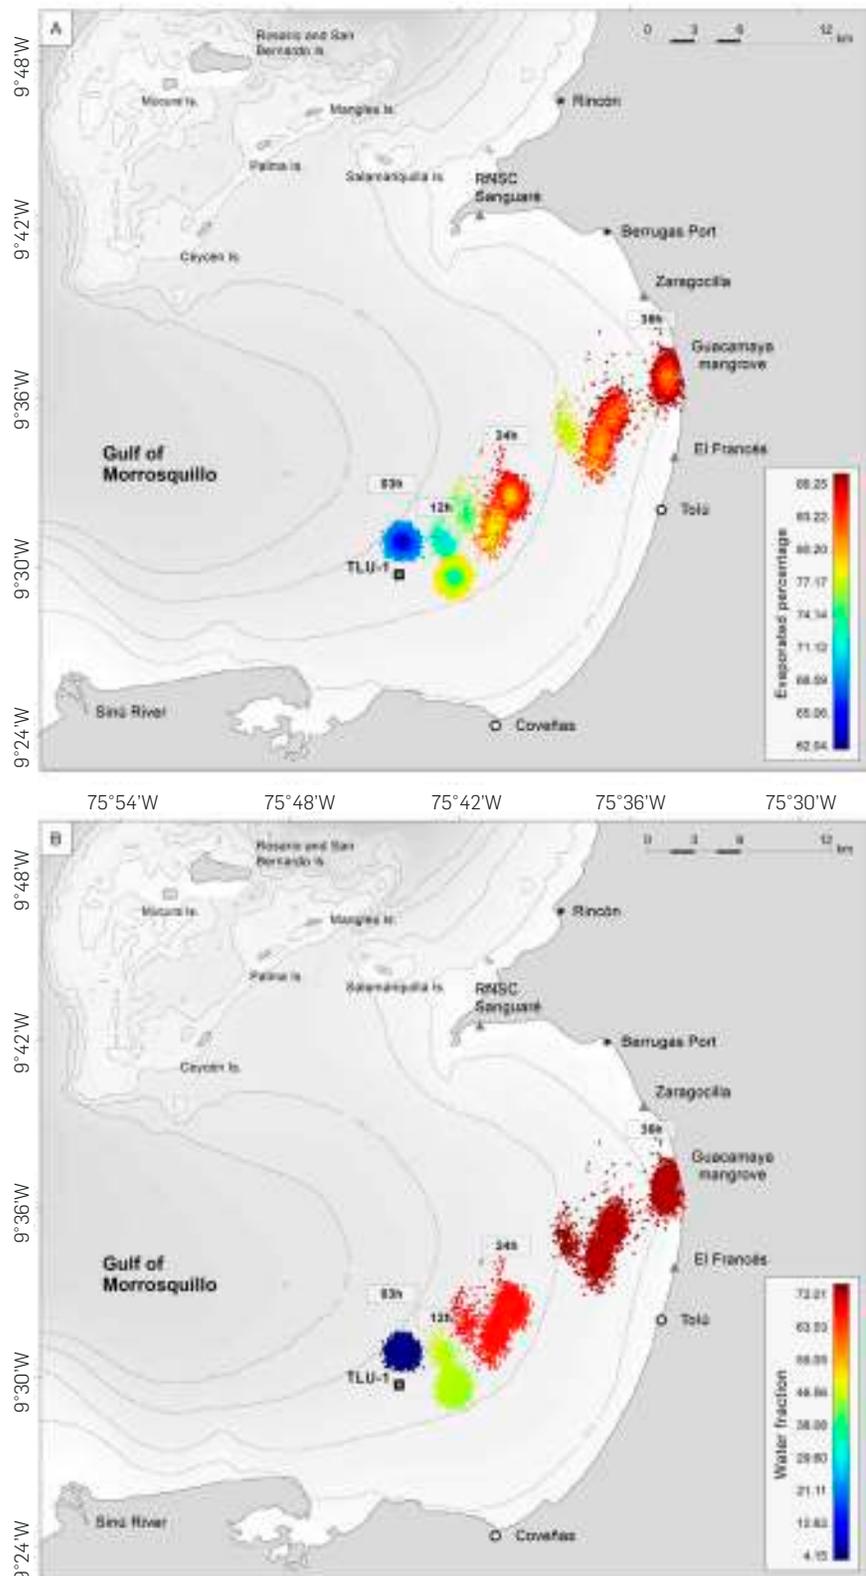


Figure 8. Evolution of (A) evaporated percentage and (B) water fraction within the oil slick. Simulation starting at 22:00 h of 21 August 2014, and ending at 17:00 h of 23 August 2014, using 50 barrels of Vasconia oil spilled in the location of the TLU-1 Coveñas Oil Terminal (square).

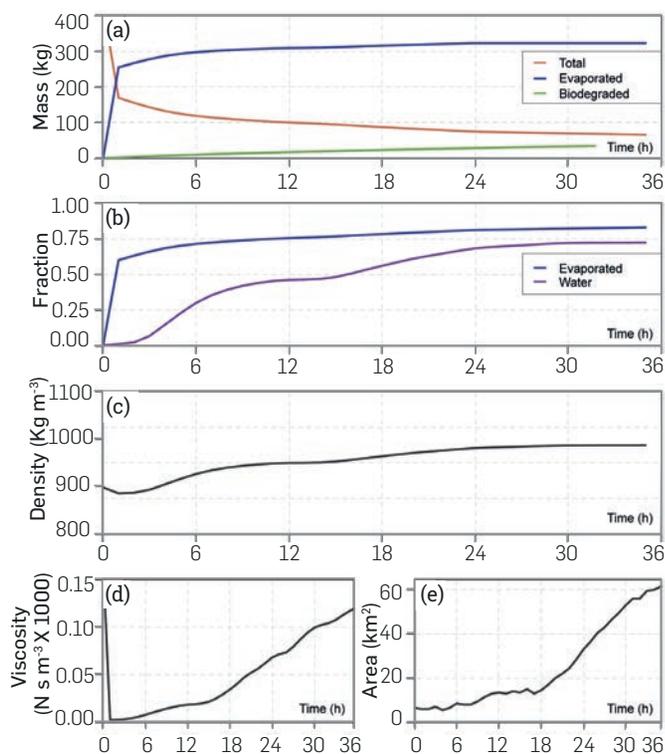


Figure 9. Mass balance of the Vasconia oil spill contingency that started on 21 August 2014, in the Gulf of Morrosquillo. It shows the temporal evolution of (A) the total, evaporated and biodegraded mass (kg); (B) the evaporated and water fractions; (C) the density of the mass (kg m^{-3}), (D) the viscosity (N s m^{-2}), and (E) the area of the slick (km^2).

CONCLUSIONS

Given the environmental and socioeconomical hazards associated to hydrocarbon transportation, it is important to understand the behaviour of crude oil after the contingency event of an oil spill. The results of the application of the oil spill transport and weathering model, OpenOil, in the Gulf of Morrosquillo, Colombian Caribbean, were presented, considering two events occurred in July and August 2014. Although no satellite images of these contingencies were found, these events were adequately characterized by means of available secondary information (reports, news, etc.) so that the simulations conducted could be validated.

The evaluation of the oil spill simulations showed that the tools implemented in this study are adequate to simulate contingencies related to the hydrocarbon charging/discharging that takes place in the Coveñas maritime terminal. These provide valuable information on the path followed by the spilled oil and the temporary evolution of the weathering processes, according to local metocean conditions, and the type of hydrocarbon used.

Major differences between the position of the oil slicks observed in the Gulf and those simulated by the numerical model are explained by the resolution of the forcing fields. In this semi-enclosed basin, a higher resolution database is recommended. Given that available information needed to force this model has a

horizontal resolution >9 km, it is necessary to implement 3D ocean models in this before simulating oil spill trajectories and weathering processes.

In the modelling approach, longshore currents, along with oceanic currents need to be considered in future experiments. This could improve the resulting simulations regarding the fate of the oil spill when it reaches the coastline.

It is evidenced that the wind and the current effects are main factors inducing changes in the position of the oil spilled in the Caribbean Colombian basin. Differences encountered in the forcing fields in both simulations could explain the horizontal spreading observed, resulting in variations in the oil slick areas. In the August simulation, both, winds and currents were stronger than in the July simulation, inducing an increase of the slick area.

Wind not only causes the horizontal advection and spreading the oil slick on the sea surface, but also influences physicochemical properties. There is evidence of a dependence of evaporation with wind velocity, and maximum water content depends on the evaporation. In the August simulation, winds were relatively strong; this could be the reason for the evaporated and water fractions being higher this month as compared to the simulation in July.

The wind data used in the oil spill and weathering model is important and should be cautiously selected. Underestimation of the wind magnitudes by the reanalysis products could have an important effect on the resulting simulations. Given that most reanalysis products have limitations in shallow areas, it is advisable to implement an atmospheric model in this region capable of solving physical processes at local scales. However, before more sophisticated models are implemented, it is very important to have a current, wave, tidal, and meteorological observation system that provides real-time data needed to validate reanalysis models or used as input information to run an operational model.

This first attempt to predict the fate and evolution of oil spilled in the Gulf of Morrosquillo allow us to conclude that this is a useful tool that could be used for operational purposes, if used with higher resolution forcing fields. Knowledge of the path of the spill, obtained from the OpenOil model implemented in this study, will enable the prediction of possible affected areas, and will help to design proper mitigation strategies and protocols, aimed at reducing the risks and negative impacts associated with this type of contingency.

There are no other oil spill simulations in this region for comparing, nor field data for the model results to be directly compared with observations; however, the results obtained by the OpenOil model are consistent with the physics of the problem and the chemical evolution of this type of oil spilled in the seawater. Nevertheless, the fate of the spills matched the reports from the local authorities that observed the oil slick from aircrafts or from the coast.

Limitations encountered in the global reanalysis models are the main source of discrepancies between the simulations and the observations of the oil slick position and transport processes. Currently, ongoing work at the ICP-Ecopetrol is focused on improving the local 3D air-sea interaction models to solve dynamic processes in the Colombian coastal region.

ACKNOWLEDGEMENTS

This work was financially supported by *ECOPETROL (Colombian Petroleum Company)* (project SSCPL: 0410010006: Adaptation of methodologies for evaluation of geohazards and sea hazards in the Colombian Caribbean Basin). This study has been conducted using *E.U. Copernicus Marine Service Information* and *ERA-5 ECMWF reanalysis data*.

REFERENCES

- [1] Keramea, P., Spanoudaki, K., Zodiatis, G., Gikas, G., Sylaios, G. (2021). Oil Spill Modeling: A Critical Review on Current Trends, Perspectives, and Challenges. *J. Mar. Sci. Eng.*, 9, 181. doi: <https://doi.org/10.3390/jmse9020181>
- [2] Singh, A., Asmath, H., Leung Chee, C., & Darsan, J. (2015). Potential oil spill risk from shipping and the implications for management in the Caribbean Sea. *Marine Pollution Bulletin*, 93(1-2), 217-227. ISSN 0025-326X. doi: <https://doi.org/10.1016/j.marpolbul.2015.01.013>
- [3] Garay J. (1995). Estudio actual infraestructura de los servicios para manejo de sustancias y residuos líquidos y sólidos provenientes de los buques en los puertos del Caribe colombiano Fase III (Puertos de Turbo-Coveñas-Riohacha/Manauare-Puerto Bolívar/Portete y San Andrés). Informe Final, CIOH. Cartagena de Indias D.T. y C.
- [4] Autoridad Nacional de Licencias Ambientales – ANLA. (2014). Concepto técnico de seguimiento No. 11501. 14 octubre de 2014. 81 pp.
- [5] Corporación Autónoma Regional de los Valles del Sinú y del San Jorge -CVS. (2014). Informe de visita GGR No. 2014-098. 6 pp.
- [6] Reed, M., Turner, C., and Odulo, A. (1994). The role of wind and emulsification in modelling oil spill and surface drifter trajectories. *Spill Sci. Technol. B.*, 1, 143-157. doi: [https://doi.org/10.1016/1353-2561\(94\)90022-1](https://doi.org/10.1016/1353-2561(94)90022-1)
- [7] Drivdal, M., Broström, G., and Christensen, K. H. (2014). Wave induced mixing and transport of buoyant particles: application to the Staffjord A oil spill. *Ocean Sci.*, 10, 977-991. doi: <https://doi.org/10.5194/os-10-977-2014>
- [8] Röhrs, J., K-F. Dagestad, Asbjørnsen, H., Nordam, T., Skancke, J., Jones, C.E., & Brekke, C. (2018). The effect of vertical mixing on the horizontal drift of oil spills. *Ocean Sci.*, 14, 1581-1601. doi: <https://doi.org/10.5194/os-14-1581-2018>
- [9] Ramírez Hernández, J.G. (2014). *First week of oil weathering of Colombian crude oil in the Colombian Caribbean Sea*. M.Sc. in Chemical Engineering Thesis. Universidad Nacional de Colombia, Medellín. 109 pp.
- [10] ASCE. (1996). State-of-the-Art Review of Modeling Transport and Fate of Oil Spill. *Journal of Hydraulic Engineering*, vol. 122, no. 11, pp. 594, 609. doi: [https://doi.org/10.1061/\(ASCE\)0733-9429\(1996\)122:11\(594\)](https://doi.org/10.1061/(ASCE)0733-9429(1996)122:11(594))
- [11] Stiver, W., and Mackay, D. (1984). Evaporation rate of spills of hydrocarbons and petroleum mixtures. *Environ. Sci. Technol.*, 18, 834-840. doi: <https://doi.org/10.1021/es00129a006>
- [12] Dagestad, K.F.; Röhrs, J.; Breivik, Ø.; Ådlandsvik, B. (2018). OpenDrift v1.0: A generic framework for trajectory modelling. *Geosci. Model Dev.*, 11, 1405-1420. doi: <https://doi.org/10.5194/gmd-11-1405-2018>
- [13] Mishra, A.K.; Kumar, G.S. (2015). Weathering of oil spill: Modelling and analysis. *Aquat. Procedia*, 4, 435-442. doi: <https://doi.org/10.1016/j.aqpro.2015.02.058>
- [14] Mackay, D., Shiu, W.Y., Hossain, K., Stiver, W., McCurdy, D. (1982). Development and Calibration of an Oil Spill Behavior Model; Toronto University (ONTARIO) Department of Chemical Engineering and Applied Chemistry: Toronto, ON, Canada.
- [15] Ward, C.P., Sharpless, C.M., Valentine, D.L., French-McCay, D.P., Aeppli, C., White, H.K., Rodgers, R.P., Gosselin, K.M., Nelson, R.K., Reddy, C.M. (2018). Partial photochemical oxidation was a dominant fate of Deepwater Horizon surface oil. *Environ. Sci. Technol.*, 52, 1797-1805. doi: <https://doi.org/10.1021/acs.est.7b05948>
- [16] Jones, C.E., Dagestad, K.-F., Breivik, Ø., Holt, B., Röhrs, J., Christensen, K.H., Espeseth, M.M., Brekke, C., Skrunes, S. (2016). Measurement and modeling of oil slick transport. *Journal of Geophysical Research – Oceans*, 121(10), 7759-7775. doi: <https://doi.org/10.1002/2016JC012113>
- [17] Hole, L. R., Dagestad, K. F., Röhrs, J., Wettre, C., Kourafalou, V. H., Androulidakis, Y., ... & Garcia-Pineda, O. (2019). The DeepWater Horizon Oil Slick: Simulations of River Front Effects and Oil Droplet Size Distribution. *Journal of Marine Science and Engineering*, 7(10), 329. doi: <https://doi.org/10.3390/jmse7100329>
- [18] Androulidakis, Y., Kourafalou, V., Robert Hole, L., Le Hénaff, M., & Kang, H. (2020). Pathways of Oil Spills from Potential Cuban Offshore Exploration: Influence of Ocean Circulation. *Journal of Marine Science and Engineering*, 8(7), 535. doi: <https://doi.org/10.3390/jmse8070535>
- [19] Brekke, C., Espeseth, M. M., Dagestad, K.-F., Röhrs, J., Hole, L. R., & Reigber, A. (2021). Integrated analysis of multisensor datasets and oil drift simulations—a free-floating oil experiment in the open ocean. *Journal of Geophysical Research: Oceans*, 126, e2020JC016499. doi: <https://doi.org/10.1029/2020JC016499>
- [20] Hole, L. R., de Aguiar V., Dagestad, K-F, Kourafalou V.H., Androulidakis Y., Kangb H., Le Hénaff M., Calzadea A. (2021). Long term simulations of potential oil spills around Cuba. *Mar. Pol. Bull.*, 167. doi: <https://doi.org/10.1016/j.marpolbul.2021.112285>
- [21] Li, C.; Miller, J.; Wang, J.; Koley, S.; Katz, J. (2017). Size distribution and dispersion of droplets generated by impingement of breaking waves on oil slicks. *J. Geophys. Res. Ocean*, 122, 7938-7957. <https://agupubs.onlinelibrary.wiley.com/doi/full/10.1002/2017JC013193>. doi: <https://doi.org/10.1002/2017JC013193>
- [22] Visser, A.W. (1997). Using random walk models to simulate the vertical distribution of particles in a turbulent water column. *Mar. Ecol. Prog. Ser.*, 158, 275-281. doi: <https://doi.org/10.3354/meps158275>
- [23] Tkalich, P.; Chan, E.S. (2002). Vertical mixing of oil droplets by breaking waves. *Mar. Pollut. Bull.*, 44, 1219-1229. doi: [https://doi.org/10.1016/S0025-326X\(02\)00178-9](https://doi.org/10.1016/S0025-326X(02)00178-9)
- [24] Hole, L.R.; Dagestad, K.-F.; Röhrs, J.; Wettre, C.; Kourafalou, V.H.; Androulidakis, I.; Le Hénaff, M.; Kang, H.; Garcia-Pineda, O. (2018). Revisiting the DeepWater Horizon spill: High resolution model simulations of effects of oil droplet size distribution and river fronts. *Ocean Sci. Discuss.* doi: <https://doi.org/10.5194/os-2018-130>
- [25] Lehr, W. Jones, R., Evans, M., Simecek-Beatty, D., Overstreet, R. (2002). Revisions of the ADIOS oil spill model. *Environ. Model. Softw.*, 17, 189-197. doi: [https://doi.org/10.1016/S1364-8152\(01\)00064-0](https://doi.org/10.1016/S1364-8152(01)00064-0)
- [26] Thrift-Viveros, D.L.; Jones, R.; Boufadel, M. (2015). Development of a new oil biodegradation algorithm for NOAA's oil spill modelling suite (GNOME/ADIOS). In Proceedings of the 38th AMOP Technical Seminar, Vancouver, BC, Canada, 2-4 June 2015; Environment Canada: Ottawa, ON, Canada, 2015; pp. 143-152.
- [27] Lehr, W.J., Overstreet, R., Jones, R., Watabayashi, G. (1992). ADIOS-Automated Data Inquiry for Oil Spills; Environment Canada: Ottawa, ON, Canada.
- [28] Overstreet, R., Lewandowski, A., Lehr, W., Jones, R., Simecek-Beatty, D., Calhoun, D. (1995). Sensitivity analysis in oil spill models: Case study using ADIOS. In Proceedings of the International Oil Spill Conference, Long Beach, CA, USA, 27 February-2 March 1995; pp. 898-900. doi: <https://doi.org/10.7901/2169-3358-1995-1-898>
- [29] Lellouche, J.M. O. Legalloudec, C. Regnier, B. Levier, E. Greiner, M. Drevillon. (2019). Quality Information Document (QUID) For Global Sea Physical Analysis and Forecasting Product GLOBAL_ANALYSIS_FORECAST_PHY_001_024. Issue 2.1. Ref: CMEMS-GLO-QUID-001-024. 81 pp. <https://catalogue.marine.copernicus.eu/documents/QUID/CMEMS-GLO-QUID-001-024.pdf>
- [30] Hersbach, H., B. Bell, P. Berrisford, S. Hirahara, A. Horányi, J. Muñoz-Sabater, J. Nicolas, C. Peubey, R. Radu, D. Schepers, A. Simmons, C. Soci, S. Abdalla, X. Abellan, G. Balsamo, P. Bechtold, G. Biavati, J. Bidlot, M. Bonavita, G. De Chiara, P. Dahlgren, D. Dee, M. Diamantakis, R. Dragani, J. Flemming, R. Forbes, M. Fuentes, A. Geer, L. Haimberger, S. Healy, R.J. Hogan, E. Hölm, M. Janisková, S. Keeley, P. Laloyaux, P. Lopez, C. Lupu, G. Radnoti, P. de Rosnay, I. Rozum, F. Vamborg, S. Villaume, J.N. Thépaut. (2020). The ERA5 global reanalysis. *Q. J. Royal Meteorol. Soc.*, 146(730), 1999-2049. doi: <https://doi.org/10.1002/qj.3803>
- [31] Law-Chune, S., L. Aouf, L. Bruno and A. Dalphinet. (2020). Quality Information Document (QUID) for Global High Resolution Production Centre GLOBAL_REANALYSIS_WAV_001_032. Issue 1.2. Ref: CMEMS-GLO-QUID-001-032. 48 pp. <https://catalogue.marine.copernicus.eu/documents/QUID/CMEMS-GLO-QUID-001-032.pdf>.
- [32] Breivik, Ø., Bidlot, J.-R., and Janssen, P.A.E.M. (2016). A Stokes drift approximation based on the Phillips spectrum. *Ocean Modelling*, 100, 49-56. doi: <https://doi.org/10.1016/j.ocemod.2016.01.005>
- [33] Devis-Morales, A., Montoya-Sánchez R.A., Bernal G. and Osorio A. (2017). Assessment of extreme wind and waves in the Colombian Caribbean Sea for offshore applications. *Applied Ocean Research*, 69, 10-26. doi: <https://doi.org/10.1016/j.apor.2017.09.012>
- [34] Payne, J. R. (1982). The chemistry and formation of water-in-oil emulsions and tar balls from the release of petroleum in the marine environment. Washington: National Academy of Sciences.

[35] Thingstad, T., & Pengerud, B. (1983). The formation of chocolate mousse from Statfjord crude oil and seawater, *Marine Pollution Bulletin*, 14(6), 214–216. doi: [https://doi.org/10.1016/0025-326X\(83\)90254-0](https://doi.org/10.1016/0025-326X(83)90254-0)

[36] Fingas, M., and Fieldhouse, B. (2009). Studies on crude oil and petroleum product emulsions: water resolution and rheology, *Colloids and Surfaces A: Physicochemical and Engineering Aspects*, 333(1–3), 67–81. doi: <https://doi.org/10.1016/j.colsurfa.2008.09.029>

[37] Fay, J.A. (1971). Physical process in the spread of oil on a water surface, *International Oil Spill Conference Proceedings*, 1971(1), 463–467. doi: <https://doi.org/10.7901/2169-3358-1971-1-463>

AUTHORS

Andrea Devis-Morales

Affiliation: T.I.P. Piedecuesta, Colombia
e-mail: admoceanologa@gmail.com

Efrain Rodríguez-Rubio

Affiliation: Ecopetrol-Instituto Colombiano del Petróleo, Piedecuesta, Colombia
e-mail: efrain.rodriquezru@ecopetrol.com.co
ORCID: <https://orcid.org/0000-0002-1150-3194>

Daniel Rincón-Martínez

Affiliation: Ecopetrol-Instituto Colombiano del Petróleo, Piedecuesta, Colombia
e-mail: daniel.rincon@ecopetrol.com.co
ORCID: <https://orcid.org/0000-0002-5684-2130>


How to cite: Devis Morales, A., Rodríguez Rubio, E., Rincón Martínez, D. (2022). Numerical modeling of oil spills in the Gulf of Morrosquillo, Colombian Caribbean. *CT&F - Ciencia, Tecnología & Futuro*, 12 (1). 69 – 83. <https://doi.org/10.29047/01225383.396>

EN ECOPETROL TRABAJAMOS PARA MITIGAR EL CAMBIO CLIMÁTICO

POR ESO PROMOVEMOS ACCIONES
QUE APORTAN A LA TRANSICIÓN ENERGÉTICA



INVESTIGACIONES
DE ENERGÍA
EÓLICA



+8 PARQUES
SOLARES



USEMOS NUESTRA ENERGÍA
PARA CONSTRUIR UN PAÍS
DE TODOS, PARA TODOS.


ecopetrol