

# A geometrical robust design using the Taguchi method: application to a fatigue analysis of a right angle bracket

Rafael Barea<sup>a</sup>, Simón Novoa<sup>a</sup>, Francisco Herrera<sup>b</sup>, Beatriz Achiaga<sup>c</sup> & Nuria Candela<sup>d</sup>

<sup>a</sup> Department of Industrial Engineering, Nebrija University, Madrid, Spain. [rbarea@nebrija.es](mailto:rbarea@nebrija.es)

<sup>b</sup> Consultant Robust Engineering, Madrid, Spain. [fco.herrera@mac.com](mailto:fco.herrera@mac.com)

<sup>c</sup> Department of industrial technologies, Faculty of Engineering, Deusto University, Bilbao, Spain. [beatriz.achiaga@deusto.es](mailto:beatriz.achiaga@deusto.es)

<sup>d</sup> ESNE, University School of Design, Innovation and Technology, Madrid, Spain. [nuria.candela@esne.es](mailto:nuria.candela@esne.es)

Received: September 7<sup>th</sup>, 2017. Received in revised form: February 12<sup>th</sup>, 2018. Accepted: March 15<sup>th</sup>, 2018.

## Abstract

The majority of components used in aeronautic, automotive or transport industries are subjected to fatigue loads. Those elements should be designed considering the fatigue life. In this paper the geometrical design of a right angle bracket has been simulated by FEM, considering the type of material, the applied load and the geometry of the pieces. The geometry of the right angle bracket has been optimized using the Taguchi's robust optimization method. As far as the authors know, there are no publications dealing with the use of the Taguchi's robust optimization method applied to the geometric design of industrial pieces having as output variable the Findley fatigue coefficient. This paper presents a method for determining the critical design parameters to extend the product life of components subject to fatigue loading. This pioneer idea is applicable to any other design or physical or mechanical application so it can be widely used as new methodology to fatigue robust design of mechanical parts and components.

**Keywords:** robust design; Taguchi method; fatigue; Findley critical plane; geometrical design; right angle bracket.

# Un diseño geométrico robusto empleando el Método de Taguchi: aplicación a un análisis de fatiga de una escuadra

## Resumen

La gran parte de los componentes usados en la industria aeronáutica, automovilista o del transporte están sometidos a cargas de fatiga. Esos componentes deberían ser diseñados considerando la vida a fatiga. En este artículo el diseño de una escuadra ha sido simulado por MEF teniendo en cuenta el tipo de material, cargas aplicadas y la geometría. La geometría de la escuadra se ha optimizado usando el método de optimización robusta de Taguchi. Hasta donde los autores han comprobado no hay ninguna publicación que emplee el método de optimización robusta de Taguchi aplicándolo al diseño geométrico de elementos industriales tomando como variable de salida el coeficiente de fatiga de Findley. Este artículo presenta un método para determinar los parámetros críticos en el diseño que afectan a la vida a fatiga del componente. Esta idea es pionera y aplicable a otros diseños o aplicaciones mecánicas que pueden emplear esta metodología para el diseño robusto a la fatiga de partes y componentes mecánicos.

**Palabras clave:** diseño robusto; método de Taguchi; plano crítico de Findley; diseño geométrico; escuadra.

## 1. Introduction

Product design is an iterative and complex decision-making engineering process. It starts identifying a necessity, applying a sequences of steps to provide an optimal solution to a particular problem, and that ends with a detailed description of the product.

In conceptual design, optimization techniques have been used to derive an optimal trade-off between conflicting objectives and criteria [1]. Thus the design goal can be expressed as an objective function. This objective function is a scalar for a single criterion optimization and a vector of functions for a multi-objective optimization. Some technique assume that the multiple responses are independent of each

**How to cite:** Barea, R., Novoa, S., Herrera, F., Achiaga, B. and Candela, N., A geometrical robust design using the Taguchi method: application to a fatigue analysis of a right angle bracket. DYNA, 85(205), pp. 37-46, June, 2018.

other while other techniques exploit the correlation in the responses for obtaining optimal design using statistics [2]. Many techniques have been proposed to solve optimization problems [3]. However, apart from these techniques, it is necessary to develop a robust design in order to optimize the reliability of the project.

A robust design is considered a design that works properly even when it is subjected to several variable manufacturing processes, variations in the environment, variability of the used materials, and by the behavior of the final user and by the characteristics of parts that have been provided by outside suppliers [4]. The impact of such factors has a direct effect on product quality. The first proposal of robust design can be traced to [5,6] when he presented the “Two-stage Design” method. This design method is based on two assumptions: firstly, a good design should be associated to variable settings that produce the best low variability of the response and secondly, it must be on the target value. Based on these assumptions, Taguchi introduced a univariate response using function of the product or process with emphasis on the two-step strategies. The Taguchi method consists of planned experiments, with the objective of acquiring data in a controlled way, executing these experiments and analyzing data, in order to obtain information about the behavior of the design process. Numerous studies[7–16] endorse Taguchi's method for the optimization of parameters for many applications such as erosion studies, thermal applications, process optimization, microstructures, etc. However, it is still to be developed in the field of structural mechanical components design.

It is estimated that about 80% of the engineering failures of structures are caused by fatigue [17]. Fatigue life varies due to random factors, load history and environment variables. Engineering structures fail when the service life of the structure is below than the expected design life. Therefore, robust optimization should be applied in structure design to minimize the sensitivity of service life caused by these factors. The development of modern computer technology has created favorable conditions, for robust design, giving the possibility to simulate many experiments, impacting in a spectacular way in the development cost (less parts for testing and iterative modifications looking for the acceptable specification).

Although the application of robust optimization to design purposes have been already applied in previous papers [17,18] the present paper combines a finite element method with a robust optimization of a parametrical model for geometrical design of a right angle bracket. Geometric optimization represents an effective tool that systematically pursue for an optimum design. This will help engineers to attain the optimal structure for the bracket. The effect on fatigue life due to accumulative damage was taken into consideration, and the applied methodology has allowed a robust design, aside from material selection, to optimize the design.

## 2. Geometric modeling

### 2.1. Model parametrization and materials

In this paper, the geometric design of a right angle bracket was selected due to its extensive use in the industry. Brackets

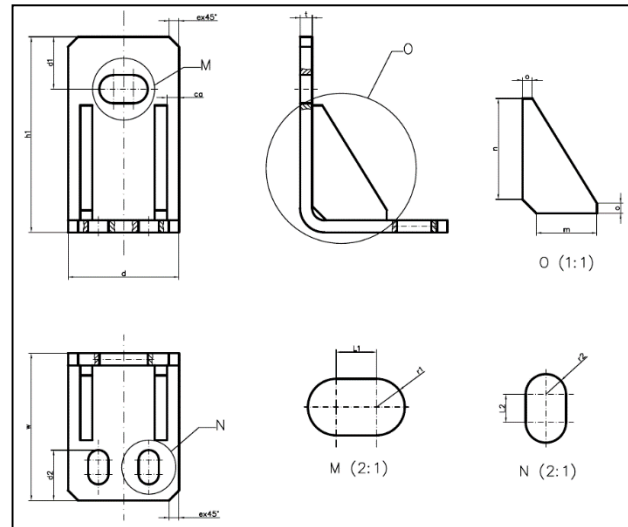


Figure 1. Parameters used to design optimization  
Source: The authors

Table 1.

Parameters used in the geometrical design of right angle bracket that have been used in Taguchi M. as control factors for the orthogonal internal array.

Parameter	Description
h1	Bracket height
d	Bracket depth
d1	Upper hole border distance
w	Bracket width
d2	Lower holes border distance
t	Thickness
L1	Upper hole length
r1	Upper hole radius
L2	Lower holes length
r2	Lower holes radius
m	Triangle gussets length
n	Triangle gussets height
o	Triangle gussets thickness
ca	Gussets border distance

Source: The authors

are normally used to assemble different parts in a particular structure. A right angle bracket usually supports a weight in a right angle, in this context, if the weight is mounted over a structure subjected to vibrations, the bracket can fall by fatigue. The model geometry of a parametrized right angle bracket is shown in Fig. 1.

The parameters proposed are shown in Table 1 and they will be considered as the factors used in the Taguchi Method.

In this paper, two different materials were used for the design optimization: carbon steel and Ti-6Al-4V. The use of two different materials is appropriate in order to obtain a design that must be independent from the used material and a way of achieving a robust design, the two different materials will allocated in an external array. Parameters determination for multiaxial fatigue is based on experimental curves of uniaxial cyclic test, for different values of the cycle asymmetry parameter  $R = \sigma_{\min} / \sigma_{\max}$  where  $\sigma_{\min}$  and  $\sigma_{\max}$  are the minimum and maximum stresses respectively in the cycle.

Carbon steel used in this study had a fatigue limit of 700 MPa in the case of  $R = -1$  and a fatigue limit of 560 MPa in the case of  $R = 0$ , both of them testing in torsion mode [19].

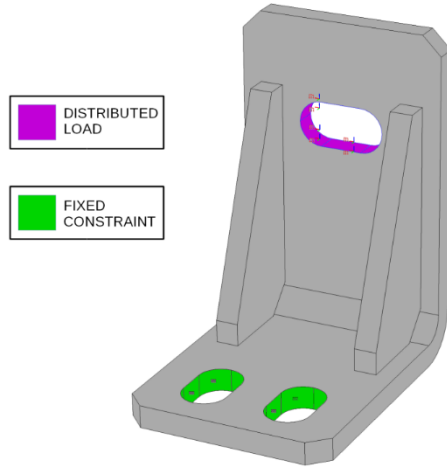


Figure 2. Parameters used to design optimization  
Source: The authors

The smooth high cycle fatigue (HCF) life of the titanium alloy Ti-6Al-4V was predicted correctly by Findley parameter over a range of fatigue tests and stress ratio by Kallmeyer [20]. The fatigue data for Ti-6Al-4V in a torsion mode are a stress limit for R=0 and R=-1 of 350MPa and 450MPa, respectively.

Finite element simulations were performed with COMSOL Multiphysics® 3.5 solver and the software used for post processing was MATLAB®. Both programs can communicate with each other through a server-client connection. This allows MATLAB® to make use of COMSOL Multiphysics capabilities.

The model was subjected to a cyclic load that consists of a distributed load applied in the upper drill while the lower ones are fully constrained. Load was distributed on the inner face of the upper hole as shown in the Fig. 2. According to Fig. 2 the load is applied in the Y axis and it fully reversible.

### 3. Methods

#### 3.1. Finite element method

Several multiaxial fatigue criteria have been considered based on previous papers [21–24] and results of simulated durability were compared with service data. This criterion in relation to the crack initiation phenomenon assumes that the fatigue failure of the material is due to some stress and strain components acting on the critical plane. Uniaxial tests are one of the tests used for experimental data that usually are parametrized with the stress amplitude ( $\sigma_a = (\sigma_{max} - \sigma_{min}) / 2$ ) and the stress range ( $\Delta\sigma = \sigma_{max} - \sigma_{min}$ ), and the results are described by Wöhler curves, which can analytically be represented by the Baskin relation, eq. 1.

$$\sigma = \sigma_{limit} + \sigma_s N^\beta \tag{1}$$

where  $\sigma_{limit}$  is the fatigue limit,  $\sigma_s$  is the fatigue strength coefficient,  $\beta$  is the fatigue strength exponent and N is the number of cycles before fracture.

In order to generalize the results obtained by uniaxial tests

with Baskin, in relation with the case of multiaxial stresses the Findley model is used [24]. It consists on a “critical-plane” model defined in terms of maximum shear stress amplitude on a given plane and the maximum normal stress on that plane multiplied by an adjustable factor, k.

The critical plane method is based on experimental evidences that cracks usually initiate in preferential material planes associated with high shear stresses. The influence of mean normal stresses is also considered because these tensile stresses are expected to keep the crack faces opened, favoring the crack growth.

Findley’s critical-plane criterion has been commonly used to describe fatigue failure under multiaxial stress [25]. This criterion is exposed in Eq. 2.

$$\left( \frac{\Delta\tau(\theta)}{2} + k\sigma_{max}(\theta) \right)_{max} = f_F \tag{2}$$

where  $\Delta\tau(\theta)$  is the shear stress amplitude on the  $\theta$  plane and  $\sigma_{max}$  is the maximum normal stress on that plane during a load cycle. The plane where this expression is maximized is considered to be the critical plane. Findley criterion has two independent material parameters  $f_F$  and k, and it is assumed that they are constant over the considered life range. It is necessary to determine two fatigue limits with different loading conditions to obtain these data. In such a way, test with two different R values can be used to determine k and  $f_F$ . In this case the fatigue limits according to the curves for R=-1 and R=0 has been used to obtain k according to eq. 3 [19]

$$\frac{\sigma_{a,R=0}}{\sigma_{a,R=-1}} = \frac{k + \sqrt{1 + k^2}}{2k + \sqrt{1 + (2k)^2}} \tag{3}$$

Based on the results of earlier studies [19,20] the calculated parameters for carbon steel ( $f_{crit} = 442.6$  MPa and  $k=0.237$ ) and Ti6Al4V ( $f_{crit} = 294.3$  k=0.271) were obtained.

The flow diagram in Fig. 3 describes the procedure used for fatigue assessment in the simulation.

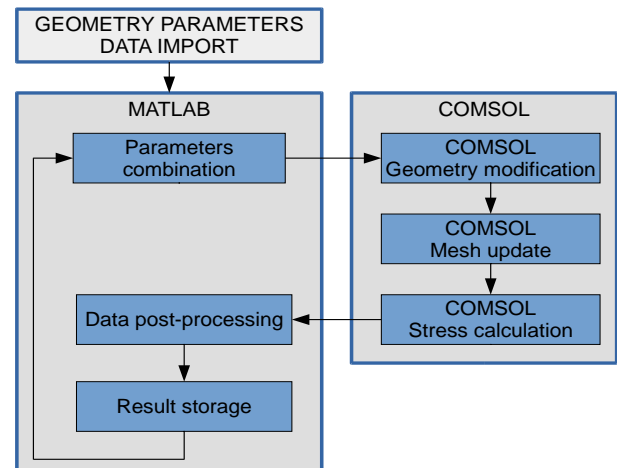


Figure 3. Flow diagram of a method used to calculate the fatigue usage factor.

Source: The authors

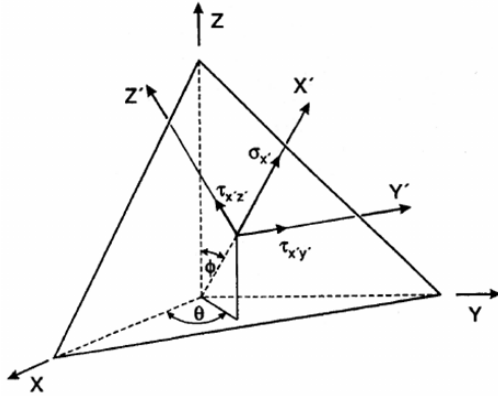


Figure 4. Calculated projections stresses in every plane depend on  $\theta$  and  $\phi$ . Source: The authors

The different combinations of geometrical factors are specified through the parameters already defined in the Table 1. These combinations have to be imported in MATLAB® to further use. Computation of shear stress history is stored for each plane in every material mesh nodes. It is necessary the computation of shear stress vector history at each plane passing through a material point.

Fatigue failure assessment is carried out automatically by the communication from both sides. MATLAB® parses a combination to COMSOL® in order to modify the geometry of the model. A new mesh is then produced and the solver resolves for the load combination case. At this point, data sets which contains the stresses is exported to MATLAB® for continuing with the analysis.

Stress data sets from the simulation are used to assess the critical plane on every node of the mesh by performing a loop for a discrete number of planes. On each iteration a  $f_F$  value is obtained for a plane which is defined by the angles with the Z axis ( $\theta$ ) and the X axis ( $\phi$ ) according to Fig. 4.

Stresses for the X'-Y'-Z' coordinate system are computed and a fatigue failure result is produced for every plane. The critical plane is determined by the plane with the maximum  $f_F$  value.

After calculation of the critical plane set of values, they are compared to the fatigue limit of the material obtained from the experiments. For this purpose a factor that relates these two values is defined as the fatigue usage factor (fus), eq. 4.

$$fus = \frac{f_F}{f_{crit}} \quad (4)$$

This expression implies that the nodes with a fus equal or greater than 1 are susceptible to fatigue failure.

Fatigue usage factors are stored in a data set as a result of every iteration. This process is repeated for all parameters combination so that a set of fatigue results is produced (see Fig. 5).

### 3.2 Taguchi method

While the ideal univariate response is a minimal variation of the output variable being on-target to have a design that should be compensated between performance and variability. Taguchi uses an ideal function with two-step strategies [26]. This measure can be modeled as a transfer function of the fixed

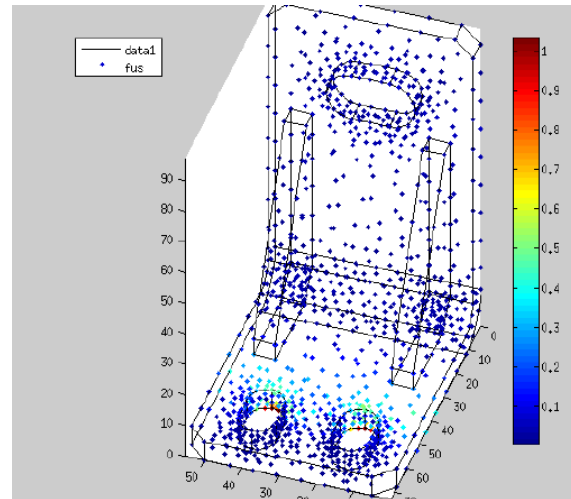


Figure 5. Graphical representation of fatigue results for one geometry variables set. It can be observed the node in the bottom (in red, this is fus=1) where a possible fatigue crack can start. Source: The authors

control variables (e.g. the geometry in this paper) and the random noise variables (e.g. the material in this paper) as shown in eq. 5

$$Response = f(\mathbf{M}, \mathbf{x}, \mathbf{N}) \quad (5)$$

where  $\mathbf{M}$  is the of signal factor vector that, in this research, has been the load applied to the right angle bracket,  $\mathbf{x}=(x_1, x_2, x_3, \dots)$  is the vector of control factors that are in this case the geometry parameters and  $\mathbf{N}=(N_1, N_2, \dots)$  is the vector of noise factors, that in this paper represent two different materials, and  $f$  is the transfer function. The aim of the optimization design is to know a combination of control factors that minimize the influence of noise factors. Due to the material noise factors, the optimal bracket design only depends on the geometrical features.

Taguchi (Taguchi. 1987) introduces the concept of ideal function as a relationship that provides an output which is proportional to the input or signal. The linear nature of the relationship between the output response (fus) and the input signal factor (M) is adjusted to produce the desired output. It also combines the dynamic characteristics considering the different outputs which can be obtained by submitting the system to different input signals, on a progressive scale within logical range of functioning of this system. This allows, in a single design, to know the system role as a whole, facilitating future developments and thus innovation.

A dynamic characteristic study involves a two-step optimization procedure, in which initially the variation around a linear function is minimized, and secondly the sensitivity of the linear function is adjusted to an objective value by changing control factors levels, looking for the optimal combination.

Considering the dynamic relationships, the zero-point proportional equation provides a useful tool to adjust the output changing the input signal factor. This equation expresses a simple linear relationship between the response,  $Y$ , the signal factor,  $M$ , and the error,  $\epsilon$ . This combination

will be adjusted to have the appropriate slope of the linear function between the output response and the signal factor that can be adjusted (eq. 6)

$$Y_{ijk} = \beta_i M_j + \varepsilon_{ijk} \quad (6)$$

where the control factors is  $i=1,2,\dots I$ , the signal factor is  $j=1,2,\dots J$  and the noise factor  $k=1,2$ . In this case when the load is zero ( $M=0$ ) the output  $Y$  will be zero and bracket will not break by fatigue. As we are speaking about an ideal function the  $\varepsilon_{ijk}$  has to be zero, and the ideal function of the brackets is expressed in eq. 7.

$$Y_{ijk} = \beta_i M_j \quad (7)$$

Where  $Y_{ijk}$  is the output, in this study the Fatigue Usage Factor –fus-,  $M$  is the signal that is the oscillatory load and  $\beta$  represents the slope of the function depending on the sensitivity of the system to the combination of controlling factors. In this case for every oscillatory load and every combination of geometrical parameters there is a directly related fus coefficient.

Changing the geometrical parameters (control factors) different results (fus) will be obtained for every load ( $M$ ) and every noise factor (steel or titanium). The results can be analyzed with respect to the control factor like a  $\frac{\text{Signal (S)}}{\text{Noise (N)}}$  ratio ( $\eta$ ) as shown in eq. 8:

$$\eta_i = 10 \log \left( \frac{\beta_i^2}{\sigma_i^2} \right) \quad (8)$$

Where  $\beta_i$ , (slope in Eq. 1) is determined by the least squares method and  $\sigma_i^2$  is the mean square error for the  $i$ th factor (Taguchi 1986) and is given by eq. 9:

$$\sigma_i^2 = \frac{1}{r_o J - 1} \sum_{j=1}^J \sum_{k=1}^{r_0} (Y_{ij} - \beta_i M_k)^2 \quad (9)$$

The beta ( $\beta_i$ ) will be adjusted (optimized) to ensure that the fus coefficient does not exceed the maximum admitted value (if  $\text{fus} \geq 1$  the bracket will collapse).

Therefore, with a small amount of experiments these engineering optimization tools can provide compelling results employing some standard tables of experiments, called orthogonal arrays [27]. These orthogonal arrays provides specific arrangement of fractional experiments with regard to the influencing factor and their levels. In the Table 2 the factors and levels are listed for every factor that will be used in this paper. In the current work L36 (Table 3) orthogonal array was used, which implied carrying out 36 tests with 3 factor of 2 levels and 12 factors of 3 levels as listed in Table 2.

Therefore, the present robust design case is defined as a dynamic characteristic arrangement and the main objective of the design activity is to optimize the S/N ratio defined in Eq. 8. In a parameter design experiment, the control factors are assigned to an inner array, while the signal factor and noise factors are configured

Table 2. Factors and level for the Taguchi design.

Factors	Factors		Level 1	Level 2	Level 3	Unit
	Drawing Parameter	Definition				
A	m	rib segment	20	25		mm
B	n	rib segment	45	55		mm
C	o	rib segment	3	6		mm
D	h1	height	87	97	107	mm
E	w	width	65	73	80	mm
F	d	depth	50	55	60	mm
G	c	radius hole	0	0.5	1	mm
H	t	thickness	5	6	7	mm
I	r1	radius hole1	5	6	7	mm
J	L1	length hole1	9	10	11	mm
K	d1	distance hole 2	23	26	28	mm
L	r2	radius hole 2	4	5	6	mm
O	L2	length hole 2	6	7	8	mm
P	d2	distance hole	22	25	27	mm
Q	ca	distance border	5	6	7	mm

Source: The Authors.

in an outer array. The signal factor ( $M_j$ ) will be the vibration weight supported by the bracket (50 kg, 60 kg or 70 kg). Noise will have two levels: Ti6Al4V and carbon steel materials (Table 3)

#### 4. Robust design, with dynamic characteristic, of the geometry of a right angle bracket

Finite element simulations were performed for each of the 36 experimental test of the Table 3. Fig. 6 shows the stress produced in a vibration cycle in one of the runs. It is clearly shown that the area close to the holes is more affected by the fatigue damage.

Having completed the finite element simulations, the S/N ratio and  $\beta$  values for each test run were obtained. Results are presented in Table 4.

##### 4.1. Predicting the optimal combination for controlling factors

In the two-step optimization process the bracket geometry is firstly optimized identifying the controlling factors which influence the S/N ratio and the sensitivity in every level. This study is carried out starting from S/N ratio ( $\eta$ ) and  $\beta$  response graphs presented in the Fig. 5. According to that, the value of controlling factor with higher value for S/N better, lower variation, and higher values for each factor level are chosen and added together.

The second step, which consists in the adjustment of the slope it is carried out after the optimal combination chosen in the first step.

Graphics enable to identify the best level of each control factor. Results clearly show that control factors such as E, H, I, K, L, O, P or Q have a significant influence in S/N ratio while factors such as A, D, H or L exerts a clear influence in the slope.

Table 3.  
Taguchi L36 Array to test 12 factors with 3 levels and 3 factors with 2 levels

L36	rib segment	rib segment	rib segment	height	wid th	dep th	chamfer hole	thicknes s	radius hole1	length hole1	distance hole 2	radius hole 2	length hole 2	distance hole	distance border
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Group 1	m	n	o	h1	w	d	c	t	r1	L1	d1	r2	L2	d2	ca
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2
3	1	1	1	1	3	3	3	3	3	3	3	3	3	3	3
4	1	2	2	1	1	1	1	1	2	2	2	2	3	3	3
5	1	2	2	1	2	2	2	2	3	3	3	3	1	1	1
6	1	2	2	1	3	3	3	3	1	1	1	1	2	2	2
7	2	1	2	1	1	1	2	3	1	2	3	3	1	2	2
8	2	1	2	1	2	2	3	1	2	3	1	1	2	3	3
9	2	1	2	1	3	3	1	2	3	1	2	2	3	1	1
10	2	2	1	1	1	1	3	2	1	3	2	3	2	1	3
11	2	2	1	1	2	2	1	3	2	1	3	1	3	2	1
12	2	2	1	1	3	3	2	1	3	2	1	2	1	3	2
13	1	1	1	2	1	2	3	1	3	2	1	3	3	2	1
14	1	1	1	2	2	3	1	2	1	3	2	1	1	3	2
15	1	1	1	2	3	1	2	3	2	1	3	2	2	1	3
16	1	2	2	2	1	2	3	2	1	1	3	2	3	3	2
17	1	2	2	2	2	3	1	3	2	2	1	3	1	1	3
18	1	2	2	2	3	1	2	1	3	3	2	1	2	2	1
19	2	1	2	2	1	2	1	3	3	3	1	2	2	1	2
20	2	1	2	2	2	3	2	1	1	1	2	3	3	2	3
21	2	1	2	2	3	1	3	2	2	2	3	1	1	3	1
22	2	2	1	2	1	2	2	3	3	1	2	1	1	3	3
23	2	2	1	2	2	3	3	1	1	2	3	2	2	1	1
24	2	2	1	2	3	1	1	2	2	3	1	3	3	2	2
25	1	1	1	3	1	3	2	1	2	3	3	1	3	1	2
26	1	1	1	3	2	1	3	2	3	1	1	2	1	2	3
27	1	1	1	3	3	2	1	3	1	2	2	3	2	3	1
28	1	2	2	3	1	3	2	2	2	1	1	3	2	3	1
29	1	2	2	3	2	1	3	3	3	2	2	1	3	1	2
30	1	2	2	3	3	2	1	1	1	3	3	2	1	2	3
31	2	1	2	3	1	3	3	3	2	3	2	2	1	2	1
32	2	1	2	3	2	1	1	1	3	1	3	3	2	3	2
33	2	1	2	3	3	2	2	2	1	2	1	1	3	1	3
34	2	2	1	3	1	3	1	2	3	2	3	1	2	2	3
35	2	2	1	3	2	1	2	3	1	3	1	2	3	3	1
36	2	2	1	3	3	2	3	1	2	1	2	3	1	1	2

Source: The Authors.

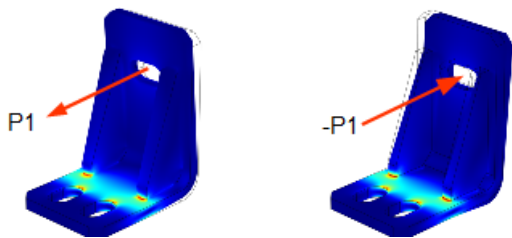


Figure 6. Two captures of a mechanical finite element results that it has been used to estimate the fus. It can be observed that high stress are in the bottom surface where the ribs are connected.

Source: The authors.

#### 4.2. Prediction and verification

The optimum control factor combination will be established selecting the parameters with higher S/N ratio and lower  $\beta$ . In those cases in which a conflict between these two variables existed, the parameters which values are closer to the mean values have been selected. The optimum factor

levels for the robust design are:

A1 because it has a little influence in S/N ratio and the value of  $\beta$  is lower.

B2 and C2 in the mean point because they have no influence.

D1 because it has not influence in S/N ratio and the value of  $\beta$  is lower.

E2 because it has a higher influence in S/N ratio, but it is not lineal. In this aspect it has been selected the mean value

F2 and G2 because as B and C has a less influence.

H3 has the higher S/N ratio with lower  $\beta$ .

I2 due to the weak effect in the S/N ratio and with I3 increases the slope.

J2 and K2 because they increase S/N ratio with a bad influence in the slope.

L3 is obviously that is better because have a higher S/N ratio and lower  $\beta$  slope.

O2 is a compromise solution in the mean value.

P3 has a good S/N ratio and a small influence in the slope.

Q3 because it improves S/N ratio with a little influence in slope.

Table 4. Results (fatigue use factor) for two levels of noise (materials) and three signal factors. If fatigue user factor (fus) is higher than 1 then the bracket will break at service

	M1		M2		M3	
	50		60		70	
	N1	N2	N1	N2	N1	N2
	Steel	Titanium	Steel	Titanium	Steel	Titanium
1	0.569	0.930	0.683	1.115	0.797	1.301
2	0.301	0.482	0.362	0.579	0.421	0.675
3	0.197	0.310	0.237	0.372	0.276	0.434
4	0.426	0.675	0.511	0.810	0.596	0.945
5	0.274	0.437	0.329	0.524	0.383	0.612
6	0.262	0.439	0.315	0.527	0.367	0.615
7	0.250	0.385	0.300	0.462	0.350	0.539
8	0.505	0.824	0.606	0.989	0.707	1.153
9	0.287	0.470	0.344	0.564	0.401	0.658
10	0.273	0.426	0.328	0.511	0.382	0.596
11	0.247	0.415	0.297	0.498	0.346	0.581
12	0.433	0.700	0.520	0.840	0.606	0.980
13	0.455	0.732	0.547	0.878	0.637	1.024
14	0.392	0.650	0.471	0.780	0.550	0.910
15	0.263	0.426	0.316	0.511	0.368	0.596
16	0.326	0.533	0.392	0.640	0.457	0.747
17	0.227	0.360	0.273	0.432	0.318	0.505
18	0.603	0.994	0.725	1.192	0.845	1.391
19	0.261	0.427	0.313	0.512	0.365	0.598
20	0.412	0.669	0.495	0.802	0.577	0.936
21	0.407	0.656	0.489	0.787	0.570	0.918
22	0.599	0.900	0.720	1.080	0.839	1.260
23	0.506	0.821	0.608	0.986	0.709	1.150
24	0.362	0.580	0.435	0.696	0.507	0.812
25	0.676	1.116	0.812	1.339	0.947	1.562
26	0.427	0.709	0.513	0.851	0.598	0.993
27	0.293	0.453	0.352	0.544	0.410	0.635
28	0.350	0.562	0.421	0.675	0.491	0.787
29	0.355	0.586	0.426	0.704	0.497	0.821
30	0.550	0.900	0.661	1.080	0.770	1.260
31	0.337	0.521	0.405	0.626	0.472	0.730
32	0.510	0.800	0.612	0.960	0.714	1.120
33	0.472	0.764	0.567	0.917	0.661	1.070
34	0.602	0.940	0.722	1.128	0.842	1.316
35	0.319	0.525	0.383	0.630	0.446	0.734
36	0.527	0.840	0.633	1.008	0.738	1.176

Source: The Authors

The comparisons of S/N ratio between original design and robust design, in accordance with Taguchi methods, are shown in Table 6. It can be seen that robust design slightly improves the S/N ratio and a significant effect in the slope that ensures a smaller influence on material resistance at vibration of the °.

The results shown in Fig. 8 demonstrate that the Taguchi dynamic characteristic design process successfully improves the fatigue resistance of the bracket. The optimum geometry improves the life fatigue of the component and it is independent of the material used in the manufacturing process.

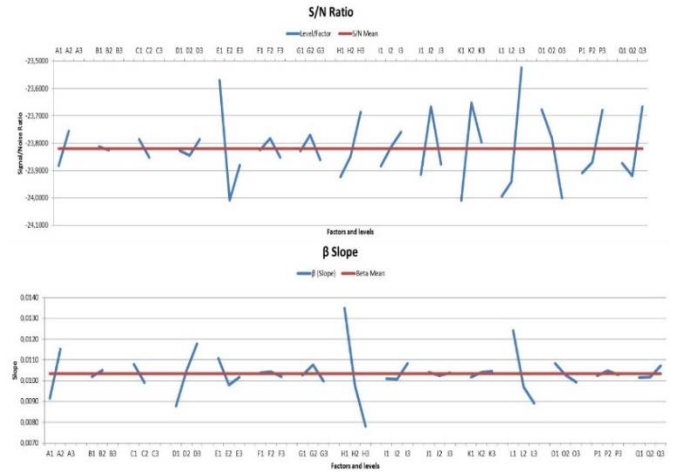


Figure 7. The magnitudes of the average response of the control factors for the S/N ratio and for the slope  $\beta$ , respectively.

Source: The authors.

Table 5. Optimum factors level.

Optimum Factor Level														
A	B	C	D	E	F	G	H	I	J	K	L	O	P	Q
1	2	2	1	2	2	2	3	2	2	2	3	2	3	3

Source: The Authors

Table 6. Comparisons of the SN Ratio and beta between Original design and robust design.

	Original geometry	Taguchi Optimum	Improvement
S/N Ratio	-24.187264	-23.325328	-0.861937
$\beta$ slope	0.013828	0.002872	0.010956

Source: The Authors

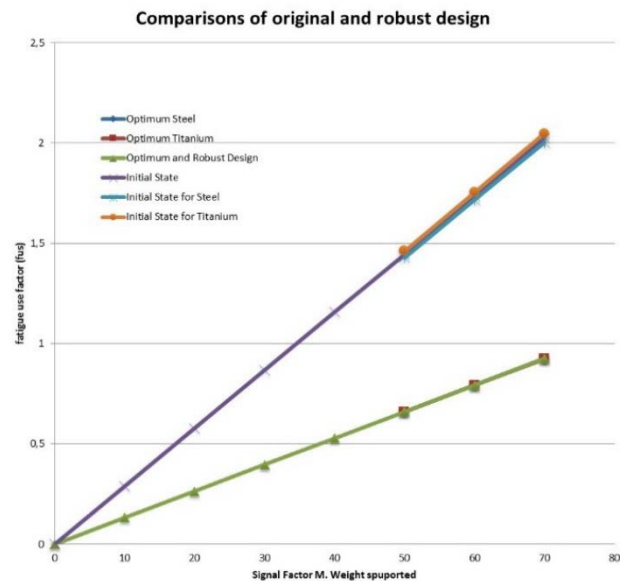


Figure 8. Visual comparisons between original fatigue and optimal design behavior.

Source: The authors.

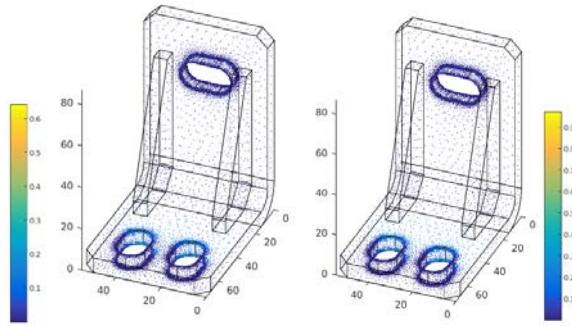


Figure 9. Final results for  $M=70$  kg. a) Steel bracket and b) Titanium bracket. It can be seen that the  $f_{us}$  is less than one in all surface.  
Source: The authors

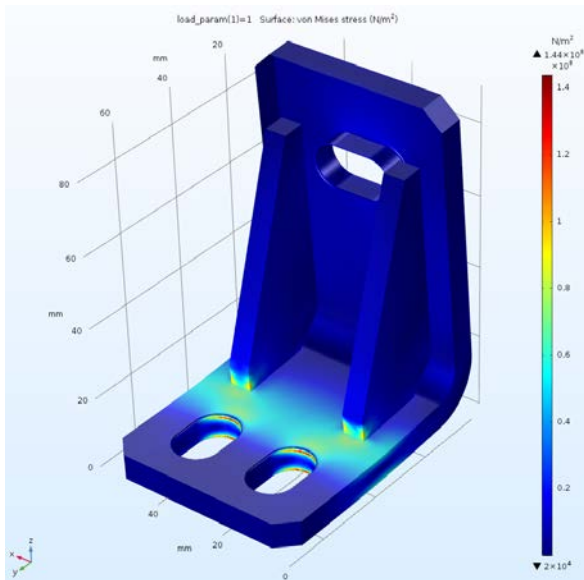


Figure 10. Final results for Von-Mises stress in steel bracket. It can be seen that maximum stresses (144 MPa) on the holes are

The optimized bracket geometry obtained by this method is shown in Fig. 9 where it can be seen that  $f_{us}$  is less than one in all surface and that the Von-Mises stress in Fig. 10 is below of fatigue limit of this steel.

The optimized bracket geometry obtained by this method has been compared with the results of applying the Eurocode 3.

From the industrial point of view, the calculation of the fatigue resistance of a right angle is not contemplated in the regulations in a specific way. Normally the rules of fatigue tests (EN 61373: "Railway applications, Rolling stock equipment, Shock and vibration tests"; SAE J 1455: "Environmental Practices for Electronic Equipment Design in Heavy-Duty Vehicle Applications"; MIL-STD 810F Method 514.5 "Random mechanical vibration", ...) require that the test be done on the entire structure to be validated and not on the components, because the resonance frequencies depend on the complete set. Eurocode 3 "Design of steel structures - Part 1 -9: Fatigue", like the rest of Eurocodes, provides common rules of structural design for the design of complete structures and component products. In this sense the calculation of the fatigue, strength of a right angle,

Table 7.  
Cost

Phase	Time (hours)
Study of the system and the limits of its application	2
Ideal function and noise factors determination	2
Control factors, usage levels, orthogonal matrix determination	3
Experiment planning. Spreadsheet arrangement	5
Parametric Design and variables selection	6
Run simulations and produce fatigue results	18
Fatigue results analysis. Estimation of best relation between S/N ratio and slope	4
Run simulation of optimum design	1
Validate results. Conclusions	4
<b>TOTAL</b>	<b>45</b>

according to the Eurocode, should be made based on the detail of the stiffening ribs in table 8.5 of Eurocode 3: 1-9. In this table, a detail category of 80 MPa is specified.

Fatigue assessment should be undertaken using the tolerant method to compare it with the results of this paper. The effective stress range may be calculated by adding the tensile portion of the stress range and 60% of the magnitude of the compressive portion of the stress range, this is 230.4 MPa in this case. This value is below of fatigue limit of these materials.

## 5. Cost

In this paper all parameters used for applying Taguchi's method are automatically changed in order to simulate final stress and therefore assess fatigue life.

Thus, fatigue assessment can be looped through all desired parameter combinations by setting their values in a database.

In this study 36 simulations have been produced for applying the Taguchi method.

The cost of the complete study is shown in the following Table 7.

To obtain an optimum design using the Taguchi method it would be necessary to perform fatigue failure tests of all combinations which would lead to high cost in terms of time and money.

Thanks to the approach used in this study a few work hours can be used to achieve a better design by optimizing the final geometry of the component.

Therefore the number of specimens to be manufactured and tested can be greatly reduced by using the methodology described in this paper.

In addition, final design of the specimen would be more efficient which also impacts cost since it directly reduces the material required to produce the component.

## 6. Conclusion

This study allows combining Taguchi dynamic design method with FEM simulation in order to optimize geometrical design of a mechanical component under fatigue. The results indicate that the adopted methodology improves fatigue resistance and reduces the influence of the material used, enabling a cheaper construction, beside a short



development time with no experimental testing, producing a significant cost reduction.

With the Taguchi method, the final optimal design depends mainly on the geometrical characteristics and it is possible to design straight angles tolerant to fatigue with a geometry that will behave optimally independently of the material chosen for its manufacture. This geometry is the one that best distributes the accumulated damage that will occur in the piece

A small number of experiments (36) provide the necessary data for an engineering optimization tool to improve the geometric design to optimally use the material. In this sense it is observed that the union of the stiffeners to the base of the right angle is an area of tension that must not be aligned with the area of fastening (holes) in order to avoid that the fatigue damage produced in these elements accumulates in the same region.

The present robust design has confirmed that good design components can improve its fatigue life in all types of applications independently of materials used to manufacturing

## References

- [1] Hsu, W. and Woon, I.M.Y., Current research in the conceptual design of mechanical products, 30, pp. 377-389, 1998.
- [2] Murphy, T.E., Tsui, K.-L. and Allen, J.K., A review of robust design methods for multiple responses, Res. Eng. Des. 16, pp. 118-132, 2005. DOI: 10.1007/s00163-005-0004-0.
- [3] Koski, J., Optimization of large structural systems, NATO ASI S, Springer Netherlands, Dordrecht, 1993. DOI: 10.1007/978-94-010-9577-8.
- [4] Downey, K., Parkinson, A. and Chase, K., An introduction to smart assemblies for robust design, Res. Eng. Des. 14, pp. 236-246, 2003. DOI: 10.1007/s00163-003-0041-5.
- [5] Taguchi, G., E. Elsaed, and Hsiang, T., Quality engineering in production systems, McGraw Hill, Emeryville CA, 1989.
- [6] Taguchi, G., Performance analysis design, Int. J. Prod. Res. 16, pp. 521-530, 1987. DOI: 10.1080/00207547808930043.
- [7] Kotcioglu, I., Cansiz, A. and Nasiri-Khalaji, M., Experimental investigation for optimization of design parameters in a rectangular duct with plate-fins heat exchanger by Taguchi method, Appl. Therm. Eng. 50, pp. 604-613, 2013. DOI: 10.1016/j.applthermaleng.2012.05.036.
- [8] Arias-Nava, E.H., Ríos-Lira, A.J., Vázquez-López, J.A. y Pérez-González, R., Estudio comparativo entre los enfoques de diseño experimental robusto de Taguchi y tradicional en presencia de interacciones de control por control, Ing. Investig. y Tecnol. 16(1), pp. 131-142, 2015. DOI: 10.1016/S1405-7743(15)72114-1.
- [9] Zhang, F.B., Wang, Z.L. and Yang, M.Y., Assessing the applicability of the Taguchi design method to an interrill erosion study, J. Hydrol. 521, pp. 65-73, 2015. DOI: 10.1016/j.jhydrol.2014.11.059.
- [10] Hong, Y.Y., Beltran, A.A. and Paglinawan, A.C., A robust design of maximum power point tracking using Taguchi method for stand-alone PV system, Appl. Energy. 211, pp. 50-63, 2018. DOI: 10.1016/j.apenergy.2017.11.041.
- [11] Balak, Z., Azizieh, M., Kafashan, H., Asl, M.S. and Ahmadi, Z., Optimization of effective parameters on thermal shock resistance of ZrB<sub>2</sub>-SiC-based composites prepared by SPS: using Taguchi design, Mater. Chem. Phys. 196, pp. 333-340, 2017. DOI: 10.1016/j.matchemphys.2017.04.062.
- [12] Sayeed-Ahmed, G.M., Quadri, S.S.H. and Mohiuddin, M.S., Optimization of feed and radial force in turning process by using Taguchi design approach, Mater. Today Proc. 2, pp. 3277-3285, 2015. DOI: 10.1016/j.matpr.2015.07.141.
- [13] Mitra, A.C., Jawarkar, M., Soni, T. and Kiranchand, G.R., Implementation of Taguchi method for robust suspension design, Procedia Eng. 144, pp. 77-84, 2016. DOI: 10.1016/j.proeng.2016.05.009.
- [14] Deepak-Kumar, S., Karthik, D., Mandal, A. and Pavan-Kumar, J.S.R., Optimization of thixoforging process parameters of A356 alloy using Taguchi's experimental design and DEFORM Simulation, Mater. Today Proc. 4, pp. 9987-9991, 2017. DOI: 10.1016/j.matpr.2017.06.307.
- [15] Sangkharat, T. and Dechjarern, S., Spinning process design using finite element analysis and Taguchi method, Procedia Eng. 207, pp. 1713-1718, 2017. DOI: 10.1016/j.proeng.2017.10.927.
- [16] Sun, G., Fang, J., Tian, X., Li, G. and Li, Q., Discrete robust optimization algorithm based on Taguchi method for structural crashworthiness design, Expert Syst. Appl. 42, pp. 4482-4492, 2015. DOI: 10.1016/j.eswa.2014.12.054.
- [17] Li, F., Meng, G., Sha, L. and Zhou, L., Robust optimization design for fatigue life, Finite Elem. Anal. Des. 47, pp. 1186-1190, 2011. DOI: 10.1016/j.finel.2011.05.009.
- [18] Sun, G., Fang, J., Tian, X., Li, G. and Li, Q., Discrete robust optimization algorithm based on Taguchi method for structural crashworthiness design, Expert Syst. Appl. 42, pp. 4482-4492, 2015. DOI: 10.1016/j.eswa.2014.12.054.
- [19] Socie, D. and Marquis, G., Multiaxial fatigue, Warrendale, PA 15096-0001 USA, 2000.
- [20] Kallmeyer, A.R., Krgo, A. and Kurath, P., Evaluation of multiaxial fatigue life prediction methodologies for Ti-6Al-4V, J. Eng. Mater. Technol. 124, pp. 229-237, 2002. DOI: 10.1115/1.1446075.
- [21] Karolczuk, A. and Macha, E., Selection of the critical plane orientation in two-parameter multiaxial fatigue failure criterion under combined bending and torsion, Eng. Fract. Mech. 75, pp. 389-403, 2008. DOI: 10.1016/j.engfracmech.2007.01.021.
- [22] Marquis, D. and Socie, D.F., Long-life torsion fatigue with normal mean stresses, Fatigue Fract. Eng. Mater. Struct. Fract. Eng. Mater. Struct. 23, pp. 293-300, 2000. DOI: 10.1046/j.1460-2695.2000.00291.x
- [23] Banvillet, A., Łagoda, T., Macha, E., Nieslony, A., Palin-Luc, T. and Vittori, J.F., Fatigue life under non-Gaussian random loading from various models, Int. J. Fatigue. 26, pp. 349-363, 2004. DOI: 10.1016/j.ijfatigue.2003.08.017.
- [24] Findley, W.N., A theory for the effect of mean stress on fatigue of metals under combined torsion and axial load or bending, J. Eng. Ind. [online]. 39, pp. 301-306, 1958. Available at: <http://hdl.handle.net/2027/coo.31924004583708>.
- [25] Findley, W.N., Fatigue of metals under combinations of stresses, Trans. ASME. 79, pp. 1337-1348, 1957.
- [26] Taguchi, G., Introduction to quality engineering: designing quality into products and processes, American Supplier Institute, 1990. Dearborn (Mich.), [online]. 1986. [accessed on: March 18<sup>th</sup> of 2015]. Available at: <http://trid.trb.org/view.aspx?id=1179550>
- [27] Taguchi, G. and Konishi, S., Orthogonal arrays and linear graphs: tools for quality engineering, American Supplier Institute, Dearborn (Mich.), 1987.

**R. Barea**, received the PhD degree in 2009 from Universidad Autónoma de Madrid, Spain. He is working on thermal properties of porous ceramics obtained by powder compaction since 2000. He is working as a researcher and senior lecturer since 2007 at industrial engineering department, Nebrija University, where is the principal research (IP) of Nebrija's Materials Group. He was working as researcher in the Spanish Research Council (CSIC) for 8 years.  
ORCID ID: 0000-0002-6784-6110  
ResearcherID: A-7594-2011  
Scopus Author ID: 56406676700

**S.J. Novoa**, received the BSc. in Mechanical Engineering specialized in Aerospace Industry from the Universidad de Vigo, Spain and he did his MSc. in Mechanical Engineering at 'Universidad Nebrija' Madrid, Spain. Afterwards, he studied a post Master degree in Aerospace Design at 'CFO Leganés' in Madrid, Spain. Currently he is working at Airbus D&S in Getafe, Spain as an engineer at the innovation area of the Manufacturing Engineering department. Additionally, he is studying a Materials Science and

Engineering PhD at 'Universidad Nebrija' about graded materials in technical ceramics. .

ORCID ID: 0000-0003-3627-0566

**F. Herrera**, obtained his degree of Technical Industrial Engineering from the University of Malaga, Spain in the year 1964. Later made MSc. of Production Management by Madrid School of Industrial Organization (EOI) and the MSc. of High Management by the Madrid and Paris Chamber of Commerce. He has developed his working life in different companies in the industry of transportation, consulting and manufacturing of components for the automotive industry. Its functions have been related to mechanical engineering, manufacturing and quality management. In the field of consultant, he has specialized in business strategic design, quality improvement and variability reduction through robust design, in accordance with the method of Dr. Genichi Taguchi.

ORCID ID 0000-0001-9722-2678

**B. Achiaga**, received PhD degree in 2015 fromr Universidad Nebrija, Spain. Started her research in powder technology in 2011 focussing on powder compaction, in her monograph "A novel method to estimate Drucker-Prager parameters and the compaction pressure influence on SPS process applied on powder technology". She is working as research teaching associate at Deusto University, in the department of industrial engineering. She was working in material die powder compaction characterization at the University of Leicester (UK).

ORCID ID: 0000-0002-5184-7944

**N. Candela** received the PhD degree in 1997. She is working on powder metallurgy since 1996. She was involved in a number of research projects in one of the most important research department in Spain of powder metallurgy (GTP-Carlos III), under the supervision of Prof. Jose Manuel Torralba. She was working as a researcher and head at Industrial Engineering Department of Nebrija University until 2016. Now she is working as a head of postgraduate education at ESNE University School of Design, Innovation and Technology. As a researcher he was involved in research projects related with powder metallurgy and materials.

ORCID ID: 0000-0002-0568-753X



**UNIVERSIDAD NACIONAL DE COLOMBIA**

SEDE MEDELLÍN  
FACULTAD DE MINAS

Área Curricular de Ingeniería  
Geológica e Ingeniería de Minas y Metalurgia

Oferta de Posgrados

Especialización en Materiales y Procesos  
Maestría en Ingeniería - Materiales y Procesos  
Maestría en Ingeniería - Recursos Minerales  
Doctorado en Ingeniería - Ciencia y Tecnología de  
Materiales

Mayor información:

E-mail: [acgeomin\\_med@unal.edu.co](mailto:acgeomin_med@unal.edu.co)

Teléfono: (57-4) 425 53 68