

# Bioclimatic analysis of three buildings for wet processing of coffee in Colombia

Análisis bioclimático de tres instalaciones para el beneficio húmedo de café en Colombia

doi: 10.15446/rfnam.v71n3.64566

Robinson Osorio Hernández<sup>1\*</sup>, Ilda de Fatima Ferreira Tinôco<sup>2</sup>, Joyce Correna Carlo<sup>3</sup>,  
Jairo Alexander Osorio Saraz<sup>1</sup> and Iván Darío Aristizábal Torres<sup>1</sup>

## ABSTRACT

### Keywords:

Bioclimatic simulation  
Biological risk  
Quality coffee  
Wet processing  
Coffee drying

This study aimed to perform a bioclimatic comparison of wet processing facilities of coffee in Colombia, with three typical types of Colombian coffee region, through computer simulation, specifically evaluating the effect of heat and steam generated by mechanical drying machines, and natural ventilation area on the temperature and relative humidity within these facilities. The effect of the natural ventilation area was observed, indicating that the greater the natural ventilation area, the lower the temperature and relative humidity, i.e. it was observed that typology b behaved better bioclimatically than typology a. The indoor environment of type a (stepped type), had a greater biological risk of proliferation of fungi and bacteria, with an average temperature of 27.5 °C, and average internal relative humidity of 70.6%. In type c, as its mechanical drying machine protrudes from the building, and expel the vapor and heat produced in the drying process to the external environment, showed the best bioclimate conditions for parchment coffee, with an average temperature of 23.5 °C and average internal relative humidity of 65.5% most of the time.

## RESUMEN

### Palabras clave:

Simulación bioclimática  
Riesgo biológico  
Calidad de café  
Beneficio húmedo  
Secado de café

Este estudio tuvo como objetivo llevar a cabo una comparación bioclimática de instalaciones de beneficio húmedo en Colombia, con tres tipologías típicas de la zona cafetera colombiana, a través de simulación computacional, específicamente evaluando los efectos del calor y vapor generados por el secado mecánico, y el área de ventilación natural sobre la temperatura y la humedad relativa en estas instalaciones. Se observó el efecto del área de ventilación natural, a mayor área de ventilación natural, menor temperatura y humedad relativa, es decir, se observó que la tipología b se comportó mejor bioclimáticamente que la tipología a. El ambiente interno de la tipología a (tipología escalonada), tuvo un mayor riesgo biológico de proliferación de hongos y bacterias, con una temperatura promedio de 27,5 °C, y una humedad relativa interna promedio de 70,6%. En el tipo c, como su secadora mecánica sobresale del edificio, y expulsa el vapor y el calor producidos en el proceso de secado al ambiente externo, mostró las mejores condiciones bioclimáticas para el café pergamino, con una temperatura promedio de 23,5 °C y una humedad relativa interna promedio del 65,5% la mayor parte del tiempo.

<sup>1</sup> Facultad de Ingeniería. Universidad Nacional de Colombia. AA 330304, Bogotá, Colombia.

<sup>2</sup> Facultad de Ciências Agrárias. Universidade Federal de Viçosa. Avenida Peter Henry Rolfs, s/n, Campus Viçosa – 36570-900, Viçosa, MG, Brasil.

<sup>3</sup> Departamento de Arquitetura e Urbanismo. Universidade Federal de Viçosa. Avenida Peter Henry Rolfs, s/n, Campus UFV – 36570-900, Viçosa, MG, Brasil.

\* Corresponding author: <rosorio0@unal.edu.co>

The coffee postharvest process is very important for preservation of coffee quality bean (Ribeiro *et al.*, 2011; Carvajal *et al.*, 2012). In Colombia, coffee is processed with wet way. The wet process of coffee includes depulping, fermentation, sorting, washing and drying the coffee bean. Coffee is often stored in post-harvest facilities.

Drying is considered a critical step of process. The coffee is dried in the interest of maintaining quality and storing it for extended periods of time (Borém *et al.*, 2007; Ciro *et al.*, 2010; Ciro *et al.*, 2011). The main problems in the cup (taste) arise from poor drying and storage. The development of microorganisms is a factor in the environment that arises only when adverse storage conditions permit excessive moisture accumulation in the grain bulk or when grain is initially stored above permissible safe moisture contents required for its preservation (Puerta, 2008; Oliveros *et al.*, 2013).

As the harvest of coffee occurs in the rainy season in Colombia, some of the time, the external environment has relative humidity above 70%; in the case of natural ventilation, this constitutes a natural bioclimatic limitation (Osorio *et al.*, 2015).

The bioclimatic environment plays an important role in the conservation of parchment coffee quality. Fungi live and reproduce best in a range of 70 to 80% relative humidity, whereas yeast and bacterial development require humidity higher than 85% in the intergranular air; temperatures higher than 50 °C can kill the embryos from coffee seeds and start the decomposition process. In the tropical zones with relative humidity above 70%, and temperatures above 27 °C, freshly harvested grains, are in favorable environment to the development of insects (Navarro and Noyes, 2001).

The biological risk is latent in facilities that perform the wet processing of coffee; for example, according to Puerta (2006), *Aspergillus ochraceus* (the leading producer of Ochratoxin A) was found in 70% of the facilities tested in Colombia, in coffee postharvest facilities, as well as solar dryers, parchment coffee and green coffee. This author argued that when adequate conditions of humidity, temperature, time and poor hygiene occur, these microorganisms can proliferate.

Approximately, 70% of the volume of coffee that is produced in Colombia is dried mechanically (González *et al.*, 2010), generally inside the wet processing facilities of coffee. In Colombia, this process usually generates a lot of steam and heat in the facilities where the coffee is dried and stored. In post-harvest process, the largest power consumption occurs in the mechanical drying process, which, having an efficiency of 50% (Puerta, 2006), added large amounts of steam and thermal energy to the building, which increases the temperature and moisture inside. Consequently, the biological risk is increased.

Poor control and design of buildings for the wet processing of coffee can compromise product quality due to inadequate bioclimatic environments (Osorio *et al.*, 2015). Humid environments and high temperatures during storage are risk conditions that can physically damage the grain, causing decomposition and deterioration of the quality of the product (Puerta, 2008). To analyze and suggest bioclimatic and air quality solutions within agro-industrial buildings, the application of mathematical and computational modeling and simulations is increasingly used (Norton *et al.*, 2009). Simulation is a very interesting tool in the design and evaluation of buildings, as the bioclimatic conditions of the buildings involve complex aspects such as energy flows, transient weather variables, stochastic occupancy patterns, etc., that traditional design methods based on experience or experimentation cannot satisfactorily quantify (Bre *et al.*, 2013).

EnergyPlus™ is one of the most used programs for energy and bioclimatic simulation for buildings (DoE, 2012), which is a free open source software developed by the US Department of Energy (DoE). This program was used by Osorio *et al.* (2015) and Osorio *et al.* (2016) for the bioclimatic and energy analysis of coffee post-harvest facilities with good results.

Its main input variables are: 3D building design, physical and thermodynamic properties of building materials, internal equipment, and weather file of the site where the building is located, in order to perform transient analysis for energy efficiency, bioclimatic variables and air quality within buildings, across balances of mass, energy and chemical composition.

This study aimed to simulate the thermal environment of three typical installations of the Colombian coffee postharvest, in order to compare and analyze the internal bioclimatic conditions, in terms of temperature and relative humidity in order to preserve grain quality.

## MATERIALS AND METHODS

### Location of buildings and production

The three buildings are located in the department of Antioquia – Colombia, in the municipality of Barbosa (at coordinates 6°26'15"N, 75°19'50"W), near to Medellín city. For these simulations, the climate file of Medellín was used (at coordinates 6°14'41"N 75°34'29"W, altitude of 1500 m), which has a representative climate for coffee of this zone (average conditions of temperature of 16 to 28 °C and relative humidity of 60 to 80%). The three farms produce the same amount of coffee, with a coffee cherry production of about 156,250 kg per year<sup>-1</sup> (31,250 kg per year of parchment coffee). This study was conducted during the month of November (main harvest of 2015).

### Description of the buildings


The facilities volumes 3D were drawn in SketchUp® program (Figure 1). The first geometry, type a (Figure 1A), has two floors (of equal size) in a stepped form. On the first floor was the mechanical drying area, while the second floor contained the area for pulped and

fermented coffee. The dimensions of this building are: 5.50 m wide x 9.50 m long x 4.0 m high.

Type b (Figure 1B) has two separate floors: the first floor is the area for pulping, fermentation and mechanical drying of the coffee and has dimensions of 11.0 m long x 6.0 m wide x 3.5 m high. The second floor consists of a parabolic solar dryer with plastic covering, measuring 11.0 m long x 6.0 m wide x 2.3 m high. Between the first and second floor, there is a lightweight concrete and brick slab.

Type c (Figure 1C) has two rooms: the main room is the area for the pulping and fermentation of coffee, while the second room is a mechanical dryer for the coffee. Type c has dimensions of 10.40 m long x 5.0 m x wide x 2.7 m high. The second room has dimensions of 2.0 m long x 2.0 m wide x 4.60 m high. Unlike types a, and b, in the type c, as its mechanical drying machine protrudes of the building, expels the vapor and heat produced in the drying process to the external environment.

Each floor of type b, as well as the room for the wet processing of coffee and mechanical drying machine of type c, were analyzed as an independent thermal area, while type a was analyzed as a single thermal zone. In each thermal zone, the thermal characteristics of the materials and other details of each patterned surface are described (DoE, 2014).

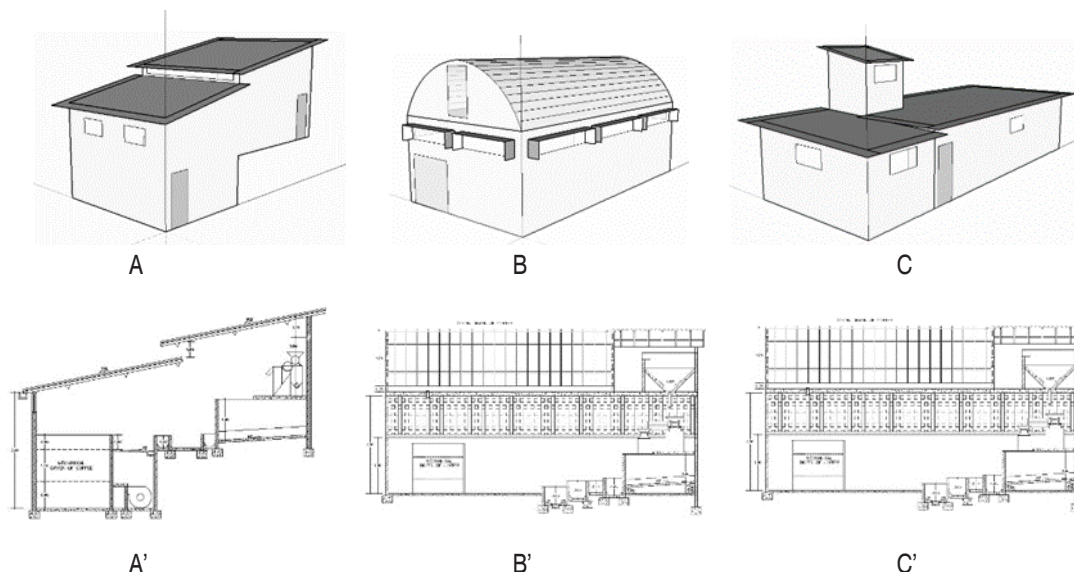

**Figure 1.** 3D geometries and architectural cuts of three buildings for the wet processing of coffee types a (A, A'), b (B, B') and c (C, C').

The three types were built with 15 cm unplastered brick, and the windows of all buildings were open all the time. Types a, and c had a fiber cement roof, whereas type b had a lightened slab between the first floor and the solar dryer (second floor).

In the three types, there were concrete stairs, fermentation tanks, and a coffee hydraulic classifier inside; to these models, one layer of concrete and other of ceramic were added at the bottom, with a volume of 3.5 m<sup>3</sup> in order to account for the effect of thermal inertia of this mass. In addition, it were measured the volume and natural ventilation area of each building of each type.

### Boundary conditions

The second floor of type b corresponds to the parabolic solar dryer of the coffee, which has a polyethylene plastic cover and a coffee layer with an average humidity of 33% wb and a 0.03 m thick slab. The solar dryer has two openings of 1.6 m<sup>2</sup> each for natural ventilation during the day. For

the night conditions, it is assumed that the solar dryer was closed. With respect to equipment, for all three types, there are lights, a humidity processing module to peel and sort coffee with a capacity of 2000 kg of coffee cherry per hour, and a mechanical drying machine with a capacity of 1125 kg of parchment coffee per day.

In the contour conditions of the models, for the thermal properties of the washing coffee, we used equations 1 and 2 proposed by Montoya *et al.* (1990), for the specific heat  $C_p$ , J kg<sup>-1</sup> °K<sup>-1</sup> ) and density of the coffee ( $\rho_C$ , kg m<sup>-3</sup>). These properties are functions of the moisture content of the product on a dry basis ( $M_{db}$ , decimal dry basis).

$$C_p = 1.3556 + 5.7859M_{db} \quad (1)$$

$$\rho_C = 365.884 + 2.7067M_{db} \quad (2)$$

The thermal properties of building materials used as boundary conditions is shown in Table 1.

**Table 1.** Thermal properties of construction materials.

Material	$\lambda$ (W m <sup>-1</sup> °K <sup>-1</sup> )	$\rho_C$ (kg m <sup>-3</sup> )	$C_p$ (kJ kg <sup>-1</sup> °K <sup>-1</sup> )
Brick	1.05	1800	0.92
Ceramics	0.65	1600	0.84
Concrete	1.75	2200	1.00
Fiber cement	0.65	1600	0.84
Mortar	1.15	2000	1.00
Polyethylene plastic	0.40	920	1.90
Steel - Iron	55.00	7800	0.46

$\rho$ : density,  $\lambda$ : thermal conductivity,  $C_p$ : specific heat.

Source: Adapted from NBR-15220 (ABNT, 2003), INMETRO, (2013), and LabEEE, (2015).

For the boundary conditions of energy balance, it is necessary to calculate the heat generated within each building (heat generated by machines, luminaries and human metabolism). Table 2 shows the power values of the machines and lighting. For the three types,

simulations were performed with heat exchanger drying machines using coal (anthracite) as fuel, which, according to Oliveros *et al.* (2009) has a consumption of 0.224 kg of coal per kg of dry parchment coffee, with a calorific value of 33440 kJ kg<sup>-1</sup>.

**Table 2.** Power of coffee processing equipment.

Equipment	Power	Unit
Engine of depulping module	3357	W
Engine of fan of mechanical dryer	2238	W
Heat exchanger of mechanical dryer	130044	W
Luminaires	10	W m <sup>2</sup>

The metabolic rate, i.e., the metabolic energy that the human body expends while performing physical activities, varies from person to person, according to the activity and working conditions performed. The value per person of 423 W was used in this study for the metabolic rate as, according to ASHRAE (2001); this value corresponds to heavy work activity and the handling of 50 kg sacks.

Table 3 shows the usage patterns of the three wet coffee processing facilities models, that is, when the machines are operating, and how many workers are into facilities and in

that schedule. Mechanical drying and pulping require the same working hours for three typologies. The solar dryer (in type b) is only opened during the day to encourage the mass exchange of water, and is closed at night to retain thermal energy, prevent condensation and prevent the ingress of moist air from outdoors.

The internal environment of the buildings was simulated for the month of November, during the main harvest of the year, which coincided with the second season rainfall in this part of Colombia (Oviedo and Torres, 2014).

**Table 3.** Usage patterns in the facilities of wet processing of coffee.

Hours	L	MD	O	PC	SD
00:00-06:00	0	0	0	0	0
06:00-07:00	1	1	2	0	0
07:00-07:30	0	1	0	0	1
07:30-09:00	0	1	0	0	1
09:00-10:00	0	1	1	0	1
10:00-10:30	0	1	0	0	1
10:30-12:00	0	1	0	0	1
12:00-13:00	0	1	2	1	1
13:00-13:30	0	1	0	0	1
13:30-14:00	0	1	0	0	1
14:00-15:00	0	1	0	0	1
15:00-15:30	0	1	1	0	1
15:30-16:00	0	1	1	0	1
16:00-17:30	0	1	0	0	1
17:30-18:00	1	1	0	1	1
18:00-19:00	1	1	1	1	0
19:00-20:00	1	1	2	0	0
20:00-21:00	1	1	2	0	0
21:00-24:00	0	0	0	0	0

L: luminaires, MD: mechanical drying, O: occupants, PC: pulping coffee, SD: solar drying.

### Statistical analysis

A statistical analysis of variance ( $P<0.001$ ) and test media (Tukey,  $P<0.05$ ) was performed for the analysis of temperature and relative humidity (hourly), with four treatments: outdoor, type a, b, c and outdoor as a control.

In addition, an analysis of the number percentage of hours that facilities remained with a relative humidity

between 90 and 100%, 70 and 90% and less than 70% was performed, in order to assess the bioclimatic environment and biological risk for the preservation of the parchment coffee quality.

### RESULTS AND DISCUSSION

Comparing type a, and b, the effect of natural ventilation area on lowering internal temperature was observed, agreeing with Osorio *et al.* (2015), and Osorio *et al.*

(2016). Nevertheless Table 4 shows that the type c building although had the smallest ventilation area, the steam and heat of the mechanical drying process is removed from the building, as its mechanical drying

machine protrudes from the building, to expel the vapor and heat produced in the drying process to the external environment. Its average temperature and relative humidity were statistically lower (Table 5).

**Table 4.** Volume built and natural ventilation area.

GN	V (m <sup>3</sup> )	VA (m <sup>2</sup> )	VA/V (m <sup>2</sup> m <sup>-3</sup> )
Type a	209	2.82	0.0135
Type b	231	17.40	0.0753
Type c	140	1.44	0.0103

GN: Group name, V: Volume, VA: Ventilation area.

On the other hand, type a, presented an internal environment with an average temperature higher than above 27 °C and average relative humidity above 70%, which according to Navarro and Noyes (2001), constitutes

an environment of high risk of attack of fungi and bacteria in grain storage; this means that type a, presented the higher biohazard in its indoor environment, due to its high average temperature and high relative humidity.

**Table 5.** Statistical data of mean temperature.

Group name	N	Temperature		Relative humidity	
		Mean	Std Dev	Mean	Std Dev
Outdoor	720	21.88 a	2.96	69.3 a	14.5
Type a	720	27.46 b	7.49	70.5 a	15.4
Type b	720	24.96 c	4.11	66.7 b	13.6
Type c	720	23.55 d	3.56	63.4 c	9.7

Means followed by the same letters do not differ by the Tukey test at 0.05 probability ( $P < 0.001$ ,  $F = 165.94$  for temperature analysis,  $F = 30.43$  for relative humidity analysis).

Taking into account that the grain moisture contents that are in equilibrium with the surrounding air containing a lower relative humidity than 70%, are considered safe (Navarro and Noyes, 2001; Puerta, 2008), and the internal environment of type a, was close to saturation 9.70% of the time, and spent more than half of the time with a relative humidity greater than 70%, 51.52% of the time (Table 6), this leads to a danger of proliferation of fungi and bacteria that are detrimental to grain quality.

On the other hand, type c, presented the most adequate bioclimatic conditions to conserve the quality of dried parchment coffee (under storage conditions), since in the month of harvest peak and rainiest in the study area (November) the Relative humidity was in a safe range 70.64% of the time, with an average relative humidity of 63.4% and an average temperature of 23.5 °C, decreasing the risk of attack by fungi, bacteria and insects (Navarro and Noyes, 2001; Puerta, 2008).

**Table 6.** Percentage of time remaining at different relative humidity.

Group name	N	Percentage of time in the range of relative humidity		
		90-100%	70-90%	<70%
Type a	720	9.70	41.83	48.48
Type b	720	5.68	38.23	56.09
Type c	720	0.42	28.95	70.64



In Colombia, it is common to store dry parchment coffee during the harvest in buildings of processing of coffee for several weeks, in order to increase the volume of dry parchment coffee to transport and save money on freight costs (Osorio *et al.*, 2015). In this context, type a, had a greater biological risk regarding the creation of fungi, bacteria and insects (hot and humid environment), meaning that the grain may be re-moistened and damaged (Puerta, 2008). In the same context, type c showed the most innocuous bioclimate (safe biologically), with a lower average temperature of 27 °C (Table 5), an internal relative humidity less than 70% most of the time, with a humidity close to saturation for almost no time (Table 6).

## CONCLUSIONS

In the buildings of post-harvest coffee with steam and heat generation inside, the effect of ventilation on lowering internal temperature was observed. However, in this study was observed that the best bioclimatic results for coffee parchment were presented in the case where mechanical drying steam from coffee was thrown directly into the external environment (type c).

The indoor environment of type a (average temperature above 27 °C, and average humidity above 70%), had a greater biological risk of the creation of fungi and bacteria, meaning that the grain may be re-moistened and damaged. In type c, as its mechanical drying machine protrudes from the building, to expel the vapor and heat produced in the drying process to the external environment, this type showed the most innocuous bioclimate conditions (safe biologically), with average temperature of 23.5 °C and average relative humidity 63.4% relative humidity.

## ACKNOWLEDGEMENTS

This paper is part of the doctoral thesis titled: Environmental assessment and optimization of facilities for coffee processing, of the student: Robinson Osorio Hernandez. The authors thank the Departamento de Engenharia Agrícola - Universidade Federal de Viçosa, CNPq, CAPES, Departamento de Ingeniería Agrícola y Alimentos - Universidad Nacional de Colombia, Federación Nacional de Cafeteros de Colombia.

## REFERENCES

- ABNT - NBR 15220. 2003. Desempenho Térmico de Edificações-Parte 2: Métodos de cálculo da transmitância térmica, da capacidade térmica, do atraso térmico e do fator de calor solar de elementos e componentes de edificações, 1ª ed., Rio de Janeiro, 66p.
- ASHRAE. 2001. Fundamentals. American Society of Heating, Refrigerating and Air Conditioning Engineers, 1ª ed., Atlanta, 892p.
- Borém FM, Ribeiro DM, Pereira RGFA, da Rosa SDVF, and de Moraes AR. 2007. Qualidade do café submetido a diferentes temperaturas, fluxos de ar e períodos de pré-secagem. *Coffee Science* 1(1): 55-63.
- Bre F, Fachinotti VD, and Bearzot G. 2013. Simulación computacional para la mejora de la eficiencia energética en la climatización de viviendas. *Mecánica Computacional* 32(1): 3107-3119.
- Carvajal JJ, Aristizábal ID, and Oliveros CE. 2012. Evaluación de propiedades físicas y mecánicas del fruto de café (*Coffea arabica* L. var. Colombia) durante su desarrollo y maduración. *Dyna* 79(173): 116-124.
- Ciro HJ, Abud-Cano LC, and Perez, L. R. 2010. Numerical simulation of thin layer coffee drying by control volumes. *Dyna* 77(163): 270-278.
- Ciro HJ, Rodríguez MC, and Castaño JL. 2011. Secado de café en lecho fijo con intermitencia térmica y flujo de aire pulsado. *Revista Facultad Nacional de Agronomía Medellín* 64(2): 6247-6255.
- DoE - USA, Department of Energy. 2015. Energyplus engineering reference. The Reference to EnergyPlus Calculations, Illinois, 847p. [https://energyplus.net/sites/default/files/pdfs\\_v8.3.0/EngineeringReference.pdf](https://energyplus.net/sites/default/files/pdfs_v8.3.0/EngineeringReference.pdf); consulted: January 2017.
- DoE - USA, Department of Energy. 2014. EnergyPlus, Input Output Reference: The Encyclopedic Reference to EnergyPlus Input and Output. Illinois, 1528p. [https://energyplus.net/sites/default/files/pdfs/pdfs\\_v8.3.0/InputOutputReference.pdf](https://energyplus.net/sites/default/files/pdfs/pdfs_v8.3.0/InputOutputReference.pdf); consulted: January 2017.
- González C, Sanz J, and Oliveros CE. 2010. Control de caudal y temperatura de aire en el secado mecánico de café, *Cenicafé* 61(4): 281-296.
- INMETRO. 2013. Qualidade e Tecnologia INMETRO. Anexo V - Portaria n.º 50, de 01 de fevereiro. <http://www.inmetro.gov.br/consumidor/produtosPBE/regulamentos/AnexoV.pdf>; consulted: November 2016.
- LabEEE - Laboratório de Eficiência Energética em Edificações. 2015. Florianópolis: Universidade Federal de Santa Catarina. <http://www.labeee.ufsc.br>, consulted: January 2017.
- Montoya EC, Oliveros CE, and Mejía G. 1990. Optimización operacional del secador intermitente de flujos concurrentes para café pergamino. *Cenicafé* 41(1): 19-33.
- Navarro S, and Noyes RT. 2001. The mechanics and physics of modern grain aeration management. CRC press, 1ª ed., 647p.
- Norton T, Grant J, Fallon R, and Sun DW. 2009. Assessing the ventilation effectiveness of naturally ventilated livestock buildings under wind dominated conditions using computational fluid dynamics. *Biosystems Engineering* 103(1): 78-99. doi: <http://dx.doi.org/10.1016/j.biosystemseng.2009.02.007>
- Oliveros C, Peñuela A, and Pabón J. 2013. Gravimet SM: Tecnología para medir la humedad del café en el secado en silos. *Cenicafé* 433(1): 1-8.
- Oliveros C, Sanz J, Ramírez C, and Peñuela A. 2009. Aprovechamiento eficiente de la energía en el secado mecánico del café, *Cenicafé* 380(1): 1-8.
- Osorio R, Guerra L, Tinoco IFF, Osorio JA, and Aristizábal ID. 2015. Simulation of a thermal environment in two buildings for the

wet processing of coffee. *Dyna* 82(194): 214-220. doi: <http://dx.doi.org/10.15446/dyna.v82n194.49526>

Osorio R, Guerra L, Tinoco IFF, Martins JH, SouzaC, and Osorio JA. 2016. Simulation of the internal environment of a post-harvest installation and a solar dryer of coffee. *Revista Brasileira de Engenharia Agrícola e Ambiental* 20(2): 163-168. <http://dx.doi.org/10.1590/1807-1929/agriambi.v20n2p163-168>

Oviedo NE, and Torres A. 2014. Atenuación hídrica y beneficios hidrológicos debido a la implementación de techos verdes ecoproductivos en zonas urbanas marginadas, *Ingeniería y*

*Universidad* 18(2): 291-308. doi: <http://dx.doi.org/10.11144/Javeriana.IYU18-2.hahb>

Puerta GI. 2006. La humedad controlada del grano preserva la calidad del café. *Cenicafé* 352(1): 1-8.

Puerta GI. 2008. Riesgos para la calidad y la inocuidad del café en el secado. *Cenicafé* 371(1): 1-8.

Ribeiro BB, Mendonça LL, Dias RAA, Assis GA, and Marques AC. 2011. Parâmetros qualitativos do café provenientes de diferentes processamentos na pós-colheita. *Agrarian* 4(14): 273-279.