

Incidence of operative parameters in the production of biohydrogen generated from urban organic waste

Incidencia de parámetros operativos en la producción de biohidrógeno generado a partir de residuos orgánicos urbanos

doi: 10.15446/rfnam.v72n2.73138

Deisy Yuliana Cano Quintero¹ and Edilson León Moreno-Cárdenas^{2*}

ABSTRACT

Keywords:

Acidification stage
Fermentation
Organic matter
Optimization
Renewable energy
Stirring

Organic waste is considered a substrate of great interest to produce biohydrogen. In the present work, the influence of some physical and chemical parameters in the operation of a bioreactor for biohydrogen generation were studied, taking as a substrate organic residue from a wholesale food market without adding inoculum. Therefore, an experimental design of central composition was made, with four factors and two levels. The dependent variables were maximum hydrogen content (% of H₂), daily production of hydrogen (L H₂ d⁻¹) and its cumulative production (L H₂). The independent variables were operation pH (pH_o), pH of acidification (pH_a), the duration time of the acidification stage, and stirring. A numerical optimization was carried out, allowing the prioritization of the factors, and maximizing the response variables. Resulting in a yield of up to 14.9 L H₂ d⁻¹, a hydrogen content of 49.2% and a cumulative production of 21.6 L H₂, for pH_a values of 4.9; pH_o between 6 and 6.1; acidification time of 2 d and stirring of 41.4 rpm. Likewise, a graphical optimization was carried out, reaching 14.9 L H₂ d⁻¹, a hydrogen content of 44.2% and an accumulated 22.8 L H₂, for pH_a values between 4.5 and 4.95; pH_o between 5.6 and 6.3; acidification time of 2 d, and stirring of 37.1 rpm. Maximum yields were 1.9 L H₂ L⁻¹ waste.day⁻¹, 4800 mL H₂ g_{COD}⁻¹, and 608.6 mL H₂ g_{TVSadded}⁻¹, values similar to those reported by other authors using organic waste in the production of hydrogen, using inoculum.

RESUMEN

Palabras clave:

Etapas de acidificación
Fermentación
Optimización
Materia orgánica
Energía renovable
Agitación

Los residuos orgánicos son considerados sustratos de gran interés para la producción de biohidrógeno. En el presente trabajo se estudió la influencia de algunos parámetros físicos y químicos en la operación de un bioreactor para la generación de biohidrógeno, tomando como sustrato residuos orgánicos provenientes de una central de abasto sin adicionar inóculo. Para ello se realizó un diseño experimental de composición central, con cuatro factores y dos niveles. Las variables dependientes fueron el contenido máximo de hidrógeno (% de H₂), la producción diaria de hidrógeno (L H₂ d⁻¹) y su producción acumulada (L H₂). Las variables independientes fueron, pH de operación (pH_o), pH de acidificación (pH_a), tiempo de duración de la etapa de acidificación y agitación. Se realizó una optimización numérica que permitió priorizar los factores y maximizar las variables de respuesta, obteniéndose hasta 14,9 L H₂ d⁻¹, contenido de hidrógeno de 49,2% y una producción acumulada de 21,6 L H₂, para valores de pH_a de 4,9; pH_o entre 6 y 6,1; tiempo de acidificación de 2 d y agitación de 41,4 rpm. De igual forma se realizó una optimización gráfica alcanzándose 14,9 L H₂ d⁻¹, un contenido de hidrógeno de 44,2% y 22,8 L H₂ acumulado, para valores de pH_a entre 4,5 y 4,95; pH_o entre 5,6 y 6,3; tiempo de acidificación de 2 d y agitación de 37,1 rpm. Los rendimientos máximos fueron de 1,9 L H₂ L⁻¹ residuo.día⁻¹, 4800 mL H₂ g_{DDO}⁻¹ y 608,6 mL H₂ g_{SVadicionado}⁻¹, valores similares a los reportados por otros autores empleando residuos orgánicos en la producción de hidrógeno usando inóculo.

¹ Alcaldía de Concordia. Carrera 20 No. 19-25. Concordia, Colombia.

² Facultad de Ciencias Agrarias. Universidad Nacional de Colombia. AA 1779, Medellín, Colombia.

* Corresponding author: <elmorenoc@unal.edu.co>

Urban organic solid wastes are generated by the communities that inhabit the so-called urban centers. This urban organic waste, also called waste biomass, is comprised of considerable amounts of peels, fruits, and vegetables in an advanced decomposition process (UPME, 2009). Organic waste consists mainly of carbohydrates, starch, protein, small amounts of cellulose and hemicellulose (Park *et al.*, 2010). It represents a source of bioenergy with the potential to reduce the current environmental and energy problems, contributing to the reduction of greenhouse gases, and the acquisition of CO₂ emission rights (Robledo-Narváez *et al.*, 2013). The transformation of organic waste by anaerobic fermentation allows better use of it, generating a renewable gas that helps to reduce the consumption of fossil fuels, and the emission of greenhouse gases; especially, if during the process, the metabolic path is oriented to the production of hydrogen instead of methane.

Hydrogen has a calorific value of 122 kJ g⁻¹, which is 2.75 times higher than fossil fuels. This feature has made it a promising alternative fuel; especially, considering that its combustion does not generate polluting emissions. It can also be used for the generation of electric power using it directly in internal combustion engines, in thermal turbine systems or in fuel cells (Kim *et al.*, 2009). In recent years, the production of hydrogen by fermentation, has aroused considerable interest because of the diversity and relatively low cost of the substrate (Lin J *et al.*, 2011) since the yields that can be obtained (3.0 moles of H₂ mol glucose⁻¹) and the content of hydrogen in the gas, up to 63% (Papadias *et al.*, 2009).

Despite the comparative advantages of organic waste in the production of hydrogen by fermentation, its use has rarely been reported. Hernández *et al.* (2014) used coffee mucilage in co-digestion with pig manure to generate hydrogen, obtaining a maximum production rate of 7.6 NL H₂ L⁻¹ of mucilage.day⁻¹, and hydrogen content in the gas up to 39%. Mohan *et al.* (2009) showed the viability of hydrogen production from plant residues, indicating that its generation depends on the concentration of the substrate and its composition. Gómez *et al.* (2009) studied the behavior of organic waste with an inoculum obtained from a municipal wastewater treatment plant, indicating that a low organic loading speed favors the

fermentation performance. The authors report that the maximum production of hydrogen was 67 L H₂ kg⁻¹ TVS_{sadded}, and although the yield was unstable, its recovery could be achieved by stirring the mixture, suspending the feed, and controlling the pH in the range of 5-5.5.

Gómez-Romero *et al.* (2014) studied the co-digestion process of raw cheese whey with fruit vegetable residues for the production of biohydrogen, using five C/N ratios (7, 17, 21, 31, and 46) at a pH of 5.5 and 37 °C. The highest yield was 449.84 mL H₂ g_{COD}⁻¹ for a C/N ratio of 21. The reported pH range for maximum hydrogen production is between 5.0 and 6.0. Wang and Wan (2008) report an optimum pH around 5.5 when anaerobic sludge, sucrose or glucose is used as a substrate in batch and continuous cultures. However, given the complex composition of organic waste, it is necessary to study the effect of pH on the hydrogen production when said substrates are used. The pH of the medium affects the yields of the hydrogen production, the type of organic acids produced, and therefore the specific speed of hydrogen production (Wang and Wan, 2008).

Although the pH impacts the hydrogen production by fermentation, its generation depends on multiple variables such as the type of substrate, temperature, organic loading speed, inoculum, type of reactor, among others. Authors such as Lin CY *et al.* (2011) and Wang and Wan (2008) carried out studies on the optimization of fermentation processes, finding that the experimental method based on response surface methodology (RSM) allowed them to represent the interaction between variables, to minimize the error in determining the effect of the parameters, and to determine the optimal conditions of operation. Therefore, it is considered an appropriate technique to optimize the fermentative hydrogen production (Muñoz-Páez *et al.*, 2012).

The evolution of hydrogen by fermentation has also been studied through kinetic models such as Monod and Gompertz, the latter being the most used to describe the progress of microbial growth, substrate degradation, soluble metabolites production, and hydrogen production in batch fermentation (Chang *et al.*, 2011). This equation has been used with great fit (R²>0.90) by different authors such as Luo *et al.* (2011), who wanted to correlate experimental

results with a mathematical model. The Gompertz model is an empirical expression of three parameters that are experimentally adjusted: lag phase time (λ), potential H_2 production (H_{max}), and hydrogen production rate (R_{max}). Despite the fact that with it, high correlation coefficients between the observed and adjusted data from the hydrogen production are obtained (Wang and Wan, 2008), the three parameters of the model are limited to the specific experimental conditions, that is to say, the experimental conditions of each research.

The present study used an experimental design, based on the response surface methodology (RSM), to carry out a planned number of experiments and analyze the responses statistically, identifying the individual and interactive effects of the pH of acidification, the operation pH, the acidification time, and the rate of stirring, in relation to the production of hydrogen using urban organic waste as a substrate. The aim of this work was to analyze the incidence of some physical and chemical parameters in the hydrogen production when urban organic waste is used as a substrate, in which is believed that the pH of acidification and the acidification time have more incidence in the hydrogen production than the operation pH and stirring speed.

MATERIALS AND METHODS

A set of tests were structured based on an experimental design of central composition with four factors and two levels in each factor. The levels of the factors were taken from results achieved in preliminary tests (data not shown). The substrate used corresponded to a mixture of organic waste of fruits and vegetables not suitable for consumption due to mechanical damage and phytosanitary problems, coming from the Central Mayorista de Antioquia (CMA). These were reduced in size and feed to a reactor in a 1:1 ratio between water and substrate. The same waste composition was used in each test. The physicochemical analysis that was performed on the substrate included the determination of the Biochemical Oxygen Demand (BOD), Chemical Oxygen Demand (COD), Total Soluble Solids (TSS), Total Volatile Solids (TVS), and Volatile Fatty Acids (VFA). For this procedure, two samples of 500 mL were taken at the beginning and the end of each fermentation. The concentrations of BOD (5210-B), COD (5220-B), VFA, TSS (2540-B) and TVS (2540-E), were carried out according to the analytical methods of the Standard Methods for the Examination of Water and Wastewater of the APHA-AWWA-WEF, 19th edition of 1995.

The independent variables or factors were the acidification time (t_a), operation pH (pH_o), pH of acidification (pH_a) and stirring (w). The response variables were hydrogen production (HP, L H_2 d⁻¹), cumulative hydrogen production (CHP, L H_2) and maximum content of hydrogen in the gas (MCH, % H_2). To determine the response variables a gas meter (Metrex G2.5 with precision of 0.040 m³ h⁻¹ and a maximum pressure of 40 kPa) with a silica gel humidity trap was coupled. Of the gas produced per day, a sample was taken in Tedlar bags with a capacity of 1 L, using 85% of its volume to be evaluated by means of gas chromatography. For this, a gas chromatograph (GC, Varian 3800) equipped with a thermal conductivity detector (TCD) was used, with columns connected in series Hs N6-07N (Hayesep), and Ms 13x4-09N (Molesieve) with a BackFlush-Bypass system, oven temperatures and detector of 40 and 170 °C respectively.

Regarding the independent variables, the pH was monitored daily with a portable pH-meter HI 98103 Hanna Instruments, equipped with a standard LB electrode with a range of 0-14 pH, resolution of 0.01 pH and accuracy of ± 0.2 pH. For stirring, was used a helical ribbon impeller, coupled to a gear-motor, a speed variator and a timer. Three stirring rates were defined according to preliminary tests; all of them were applied during five minutes with a frequency of every hour. The acidification time (t_a) consisted in the number of days elapsed from the beginning of the fermentation until the addition of a base (agricultural lime) was started.

The results in each response variables were fitted to multivariable second-order polynomial models, where the "backward" method was used to select the significant parameters in each model. The verification of the fit of the models was made using variance analysis with a significance level of 5%. Besides, an optimization was carried out in order to maximize the response variables, to obtain the combination of these responses and establish under these conditions the values of the factors. The fit and optimization of the models was done through the Design Expert V9® software. The optimization process followed the method of statistical desirability, in addition a canonical correlation analysis of the response surfaces in the variables was carried out, and the stationary point was located in the experimental region with the SAS software, version 9.0®.

Besides to the model obtained by non-linear regression, the modified Gompertz model was used to describe the Cumulative Hydrogen Production (equation 1).

$$H = P_{exp} * \left\{ -\exp \left[\frac{R_{max} * e}{P} * (\lambda - t) + 1 \right] \right\} \quad (1)$$

Where: H is the cumulative production of hydrogen (mL), λ the lag phase time (h), P is the potential production of hydrogen (mL), R_{max} is the maximum rate of hydrogen production (mL h⁻¹) in the time interval, t corresponds to the hours per day of biohydrogen production and e is 2.718281828 (Valdez-Vazquez and Poggi-Varaldo, 2009). The cumulative production of hydrogen (H) was obtained by adding the liters registered in each test every day, from the first day until the presence of hydrogen in the gas ceased. The lag phase time corresponded to the days elapsed from the moment the lime was added to the bioreactor until the production of hydrogen began. The potential production of hydrogen (P) was the cumulative total of the production in each test, while the maximum production rate was given by the ratio between the maximum value of hydrogen production and the

hours that were required for it in each test. The fit of the experimental data to the Gompertz model (R^2 and R^2_{adj}) was done with the Curve Fitting Tool (CFTools) from Matlab, version 2012®.

All experimental tests were carried out in a stainless-steel bioreactor, hermetically sealed, with a volume capacity of 20 L and operated at 30 °C in batch mode. The tests were performed in the Agricultural Mechanization Laboratory of the Faculty of Agricultural Sciences of the Universidad Nacional de Colombia, Medellín campus.

RESULTS AND DISCUSSION

Characterization of the substrate

The substrate was comprised of a mixture of green leaves waste (cabbage and lettuce) and fruits (papaya, mango, guava, and orange). The results of the initial and final physicochemical characterization of the substrate are shown in Table 1. Tests E1, E2 and E5 showed inconsistent results, attributed maybe to the lack of uniformity in the size of the waste at the time of the analysis (data not shown).

Table 1. Physicochemical characterization of the raw material.

Test	VFA (meq L _{VFA} ⁻¹)	COD (mg O ₂ L ⁻¹)	TVS (mg L ⁻¹)	TS (mg L ⁻¹)	BOD (mg O ₂ L ⁻¹)
E3-I	490	58,500	50,200	79,900	32,050
E3-F	470	53,500	22,280	64,780	23,032
E4-I	660	60,000	16,020	33,040	20,433
E4-F	450	50,000	15,460	55,600	25,183
E6-I	7500	54,250	38,760	58,640	34,833
E6-F	6550	37,500	20,560	55,540	25,608
E7-I	3300	55,750	35,720	68,520	39,333
E7-F	2850	42,500	29,240	51,900	25,650
E8-I	3660	47,500	25,900	42,180	23,733
E8-F	2860	43,750	16,280	45,720	24,967
E9-I	3620	75,750	49,120	66,040	38,417
E9-F	2420	70,750	28,480	80,280	30,250
E10-I	3440	72,500	41,460	63,080	36,167
E10-F	3440	55,000	36,440	89,560	22,475
E11-I	4380	50,000	24,460	38,520	20,308
E11-F	3400	45,000	16,860	50,040	23,000
E12-I	3600	67,500	61,740	79,200	33,583
E12-F	1680	66,750	42,020	88,120	26,583
E13-I	5160	100,750	50,900	68,160	32,000
E13-F	2360	76,750	36,420	78,800	29,250
E14-I	3940	80,750	58,520	77,100	36,583

Continuation Table 1

Test	VFA (meq L _{VFA} ⁻¹)	COD (mg O ₂ L ⁻¹)	TVS (mg L ⁻¹)	TS (mg L ⁻¹)	BOD (mg O ₂ L ⁻¹)
E14-F	3860	75,000	32,160	76,460	30,000
E15-I	3640	63,250	45,180	64,860	24,725
E15-F	3440	43,250	43,580	58,520	22,458
E16-I	3820	86,750	35,440	91,160	34,417
E16-F	3560	70,000	31,900	71,440	26,750
E17-I	3920	62,875	21,300	50,920	20,833
E17-F	3840	53,375	19,200	25,880	16,792
E18-I	3400	77,125	36,740	83,880	37,750
E18-F	3180	64,625	27,600	56,800	18,458
E19-I	3920	52,125	30,360	69,400	35,208
E19-F	3480	48,375	22,700	60,960	23,250
Average	3322	61,391	33,219	63,906	27,940

E: Test I: Initial F: Final

The percentages of organic matter removal varied between 1 and 36%; the highest COD value 100,750 mg O₂ L⁻¹ was observed in test E13, in which a 24% of organic matter was removed, and a 15.2% of hydrogen in the gas was obtained. An increase in the percentage of removal, up to 18%, was observed at high concentrations of organic matter. This increase may happen because with the increment in the organic load there is a greater amount of carbohydrates and hemicellulose available to be used as a substrate by the bacterial population (Mohan *et al.*, 2009). However, the maximum production did not occur with the highest COD value. This discrepancy can be explained since high initial values of COD can generate an accumulation of metabolites and instability in the pH (Redondas *et al.*, 2012).

It has been reported that the adequate concentration of Total Solids (TS) to obtain hydrogen from organic waste varies between 1.3 and 50 g L⁻¹ (Sekoai and Gueguim Kana, 2013). In the present work, the concentration of TS ranged from 25.8 to 91.2 g L⁻¹. For this last value, the content of H₂ in the gas decreased, while the CO₂ increased to more than 70%, similar results to those presented by Rangel (2011). Likewise, the hydrogen content in the gas was low or zero for tests E7, E15, and E18, in which there was a concentration of total solids of 68.5, 64.8, and 83.8 g L⁻¹ respectively. This situation coincided with the report of others authors, Liu *et al.* (2009) studied

the production of hydrogen from organic solid waste at different TS concentrations.

Volatile Fatty Acids (VFAs) showed a wide range of variation, from 350 to 7500 meq L_{VFA}⁻¹, this last value was the initial value for test six in which a maximum hydrogen percentage of 6.41 was obtained. High values of VFA, higher than 3000 mg L⁻¹ (3000 meq L_{VFA}⁻¹), generate a VFA accumulation that favors the depletion of the buffer capacity of the substrate, affecting directly the pH, which plays a crucial role in the hydrogen production and in the growth of the acidogenic microbial population (Elbeshbishy *et al.*, 2011).

Hydrogen production and performance indicators

The hydrogen production (HP) ranged between 0 and 14.4 L d⁻¹, the maximum hydrogen content in the gas (MCH) was between 0 and 42.4%, and the cumulative production of hydrogen (CPH) was between 0 and 20.4 L (Table 2). In some tests, there was not hydrogen production, as was the case of tests 1, 15, 18 and 19. The highest values of hydrogen production were observed in tests 2, 4 and 8 with 14.4, 9.8 and 6.4 L H₂ d⁻¹ and a hydrogen content in the gas of 36.9, 42.4 and 24.5%, respectively. The mentioned tests had acidification times of 2.2 and 1 day. The hydrogen production per day was higher compared to those obtained by other authors such as Ueno *et al.* (2007) and Kim *et al.*

(2008), who in tests with organic and restaurant waste found productions of 5.4, and 1.47 L H₂ d⁻¹. Concerning hydrogen content, the values obtained were lower than those reported by these same authors (55%), with a maximum value of 42.4%.

The maximum daily and cumulative production were obtained for pH_a, pH_o, and stirring of 4.55, 5.93, and 37.8 rpm, respectively. In turn, the highest hydrogen content

in the gas was reached for pH_a, pH_o, and stirring of 4.65, 5.84, and 37.8 rpm, respectively. These results coincide with those given by other authors such as Fernández *et al.* (2010), who using food waste under these conditions and with mesophilic temperature obtained high hydrogen production. Other authors (Valdez-Vazquez and Poggi-Valardo, 2009) achieved up to 58% of hydrogen in the gas for a mesophilic regime, using an inoculum from wastewater.

Table 2. Production and test performance indicators.

Test	pH _a	pH _o	t _a (d)	w (rpm)	HP (L H ₂ d ⁻¹)	MCH (%H ₂)	CPH (L H ₂)	Y _s (L H ₂ L _{waste.day} ⁻¹)	Y _{COD} (mL H ₂ g _{CODremoved} ⁻¹)	Y _{TVS} (mL H ₂ g _{VSadded} ⁻¹)
1	3.97	6.11	1	29.9	0.0	0.0	0.0	0.0	NA	NA
2	4.55	5.93	2	37.8	14.4	36.9	20.4	1.9	NA	NA
3	4.66	6.38	3	45.1	2.8	28.2	5.4	0.4	564	56.2
4	4.65	5.84	2	37.8	9.8	42.4	16.0	1.3	975	608.6
5	4.15	5.22	1	29.9	2.1	23.3	4.1	0.3	NA	NA
6	4.9	5.49	3	29.9	3.1	9.4	3.2	0.4	183.9	79.5
7	4.07	6.29	3	45.1	0.2	3.1	0.2	0.1	14.3	5.3
8	4.03	5.35	1	45.1	6.4	24.5	9.3	0.9	1701.3	246.3
9	4.94	5.51	1	45.1	0.7	4.6	0.9	0.1	140	14.3
10	4.9	5.42	1	29.9	2.4	18.5	3.9	0.3	137.7	58.1
11	4.16	5.56	3	45.1	2.2	26.9	3.2	0.3	430	87.9
12	4.61	5.98	1	45.1	3.6	10.9	6.9	0.5	4800	58.3
13	4.75	6.39	1	29.9	3.8	15.2	4.5	0.5	158.3	74.7
14	3.8	5.98	3	29.9	0.08	3.9	0.1	0.0	13.6	1.3
15	4.32	6.43	3	29.9	0	0.0	0.0	0.0	0.0	0.0
16	4.3	6.46	3	29.9	0.5	6.4	0.7	0.8	29.9	14.1
17	4.78	6.14	3	45.1	0.4	7.3	0.6	0.1	42.1	18.8
18	4.51	6.4	1	45.1	0	0.0	0.0	0.0	0.0	0.0
19	3.8	4.41	2	37.8	0	0.0	0.0	0.0	0.0	0.0

Y_s: substrate yield, Y_{COD}: yield according to organic load, Y_{TVS}: yield according to total volatile solids, NA: Not Available.

The maximum yield of the substrate was of 1.9 L H₂ L_{waste.day}⁻¹ in test two. This result was obtained without using any inoculum. Shin *et al.* (2004) found yields of 0.33 L H₂ L_{waste.day}⁻¹ with waste from marketplaces in a continuously agitated bioreactor and an inoculum pretreated with high temperatures at intervals of 15 min for 2 d, and a pH of 6.5; reaching a hydrogen content in the gas of 13%. Robledo-Narváez *et al.*

(2013), reported very similar values using a batch-type reactor with urban organic waste with inoculum and pH value of 6.8, the yield obtained was 0.27 L H₂ L_{waste.day}⁻¹.

The maximum yield reached, according to the organic load, was 4800 mL H₂ g_{CODremoved}⁻¹. This yield was higher than reported by other authors (Kim *et al.*, 2008) who obtained a yield of 128 mL H₂ g_{CODremoved}⁻¹, with organic

waste in batch fermentation and pH between five and eight. Other authors, instead, report that in fermentations oriented to the production of hydrogen using urban waste and sludge from treatment plants, the yield was $9873 \text{ mL H}_2 \text{ g}_{\text{CODremoved}}^{-1}$, with pH between 5.5 and 6.0, and using inoculum pretreated with high temperatures (Zhu *et al.*, 2008).

The maximum yield with respect to the volatile solids added (Y_{TVS}), was obtained in test 4 with $608.6 \text{ mL H}_2 \text{ g}_{\text{VSadded}}^{-1}$, which corresponds to the test with the highest hydrogen content in the gas. A value much higher than reported by Nagao *et al.* (2012), who obtained yields of $48 \text{ mL H}_2 \text{ g}_{\text{VSadded}}^{-1}$ with a mixture of urban organic waste in an operation pH range between 5.2 and 5.5, with operating conditions similar to those evaluated in this work. Lee *et al.*

(2010) obtained yield of $118 \text{ mL H}_2 \text{ g}_{\text{VSadded}}^{-1}$ with retention time of 96 d, for organic and restaurant waste. Other authors with crop and livestock waste have found that the yields can show significant variation, from 3 to more than $290 \text{ mL H}_2 \text{ g}_{\text{VSadded}}^{-1}$, because of the different composition of the raw material (Guo *et al.*, 2010).

Cumulative Production of Hydrogen (CPH) according to the modified Gompertz model

The CPH, according to the modified Gompertz logistic model, showed that the highest volume of hydrogen was reached in test 2 with 20.3 L H_2 , followed by test 4 with 15.9 L H_2 (Figure 1). The production does not begin for all the tests at the same time because this depends on the acidification time used in each of them.

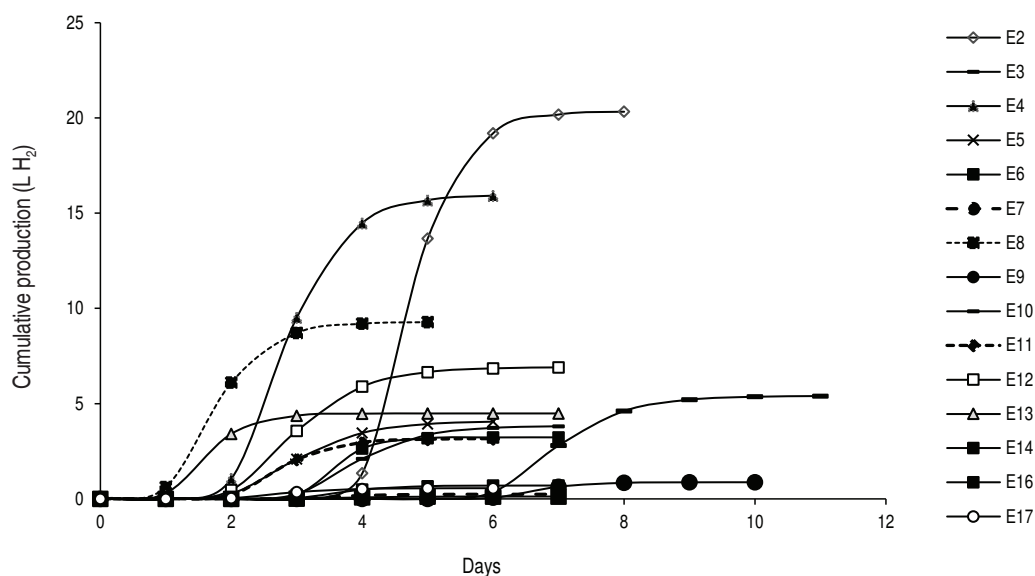


Figure 1. Cumulative production of hydrogen fitted to the modified Gompertz model.

The CPH increased until reaching its asymptotic value H_{max} . At this point, the daily hydrogen production ceased due to the depletion of the substrate given that the fermentations were made in batch. The experimental data were fitted appropriately to the modified Gompertz logistic model, obtaining multiple correlation coefficient higher than 0.99 (Table 3).

The highest hydrogen production speeds were observed in tests 2 and 4, at 599.6 and $406.2 \text{ mL H}_2 \text{ h}^{-1}$, and adaptation times of 96 and 48 h respectively. Sharma

and Li (2009) obtained hydrogen production speeds of $13 \text{ mL H}_2 \text{ h}^{-1}$ with urban organic waste and wastewater, with correlation coefficients higher than 0.95. Gadhe *et al.* (2014) found a delay in the hydrogen production speed with loads higher than $50 \text{ g}_{\text{COD}} \text{ L}^{-1}$, coinciding with the results obtained in tests 3, 7, 9, 11, 14, 16 and 17 of this work, whose concentrations were between 50 and $86.75 \text{ g}_{\text{COD}} \text{ L}^{-1}$. The results seem to indicate that with organic matter concentrations greater than $70 \text{ g}_{\text{COD}} \text{ L}^{-1}$ and acidification time of 3 d, there is a decrease in the average speed of hydrogen generation.

Table 3. Parameters of the modified Gompertz logistic model.

Test*	H _{max} (mL H ₂)	R _{max} (mL H ₂ h ⁻¹)	λ (h)	R ²
2	20,351.4	599.6	96	0.999
3	5409	117.5	144	0.999
4	15,975.7	406.2	48	0.999
5	4095	87.2	48	0.999
6	3227.6	128.7	72	0.999
7	234.6	7.8	72	0.999
8	9294.4	265.9	24	0.999
9	870.3	28.7	144	0.999
10	3834.8	88.8	72	0.999
11	3158.4	89.7	48	0.999
12	6917	149.9	48	0.999
13	4483.4	158	24	0.999
14	121.2	3.2	72	0.999
16	697.3	21.4	72	0.999
17	559.2	15.3	48	0.999

*Test 1, 15, 18 and 19 are not included since there was no hydrogen generation.

Statistical analysis and mathematical models obtained by regression

The analysis of variance for the different response variables according to a second-order polynomial quadratic model shows that in each variable the models are statistically significant ($P < 0.05$, Table 4). Also, in none of the cases, there is influence of the individual

effects. However, two of the quadratic effects (B² and C², operation pH and the acidification time, respectively) and combinations (AB and AD), have a statistically significant effect in the hydrogen production. The interaction between BC is significant only for the maximum content of hydrogen (MCH, %), and the cumulative production of said gas (CPH, L H₂).

Table 4. Variance analysis for quadratic polynomial models in the response variables ($\alpha=0.05$).

Source	P value		
	HP (L H ₂ d ⁻¹)	MCH (%)	CPH (L H ₂)
Model	0.0010 *	0.0144 *	0.0004 *
A - pH of acidification	0.4968 ^{NS}	0.3526 ^{NS}	0.4643 ^{NS}
B - operation pH	0.5018 ^{NS}	0.1065 ^{NS}	0.4505 ^{NS}
C - Acidification time (d)	0.2153 ^{NS}	0.9587 ^{NS}	0.1111 ^{NS}
D - stirring (rpm)	0.7327 ^{NS}	0.6990 ^{NS}	0.8790 ^{NS}
AB	0.0261 *	0.0108 *	0.0121 *
AD	0.0147 *	0.0535 *	0.0159 *
BC	0.1055 ^{NS}	0.0476 *	0.0304 *
B ²	0.0007 *	0.0010 *	0.0002 *
C ²	<0.0001 *	0.0113 *	<0.0001 *

NS: nonsignificant effect and *: significant effect.

In the regression models, the variation around the mean explained by them was higher than 83% (Table 5). This situation indicates that models adequately represent the experimentation and it can be used for predictive purposes in the variables evaluated. However, in the

variable maximum content of hydrogen (MCH), the variation explained by the models, taking into account the number of terms, decreased to 65% (R^2 adjusted) which means the model could be reduced by eliminating the components that do not have a significant effect.

Table 5. Coefficients for polynomial quadratic models and adjustment.

Regression coefficient	HP (L H ₂ d ⁻¹)	MCH (%H ₂)	CPH (L H ₂)
β_0	-154.135	-189.461	-202.521
βx_1	-38.658	-265.397	-65.581
βx_2	65.210	231.116	97.447
βx_3	21.472	5.780	28.139
βx_4	1.555	5.514	2.055
$\beta x_1 x_2$	9.816	57.218	15.440
$\beta x_1 x_4$	-0.360	-1.284	-0.474
$\beta x_2 x_3$	1.892	11.655	3.603
βx_2^2	-9.598	-43.734	-14.763
βx_3^2	-8.290	-18.490	-12.579
R^2	0.91	0.83	0.93
R^2_{adjusted}	0.82	0.65	0.86

x_1 , x_2 , x_3 and x_4 correspond to the variables pH of acidification, operation pH, acidification time and stirring respectively.

Numerical optimization of the models

The optimization allowed to maximize the hydrogen generation, estimating the maximum daily production at 14.9 L H₂ d⁻¹ for pH_a values of 4.9, pH_o of 6.0, t_a of 2 d and stirring of 40.2 rpm. The maximum hydrogen content in the gas is estimated at 49.2% at a pH_a of 4.9, pH_o of 6.2; t_a of 1.9 d and stirring of 41.4 rpm. Likewise, the maximum cumulative production of hydrogen was of 21.6 L H₂, for a pH_a of 4.9, a pH_o of 6.08, a t_a of 2 d and stirring of 41.4 rpm. Values in the independent variables close to those mentioned above, also allowed to achieve the best results in hydrogen production during the experimentation. The simultaneous optimization of the three response variables showed that the fermentation should be carried out at a pH_a of 4.9, a pH_o of 6.0, a t_a of 1.9 d and stirring of 29.9 rpm. With these values, the daily production is estimated at 14.7 L H₂ d⁻¹, the maximum content of hydrogen in the gas in 50.1% and the cumulative production in 21.6 L H₂. In general, when the pH_a increases and the pH_o drops, or when the pH_a drops, and the pH_o increases, the production of hydrogen decreases taking as reference a two-day acidification time (Figure 2).

Graphical optimization

The graphical optimization displays the area of feasible response values in the factor space. Figure 3 shows the superposition of the contour plots of each variable, which allowed to find the intersection area that provided the best values for the multiple responses. The regions that did not meet the optimization criteria are shaded in dark gray, and in light gray the optimization area. The above-mentioned area was found for pH_a values between 4.5 and 4.95, pH_o between 5.6 and 6.3, acidification time of 2 d and stirring of 37.1 rpm; reaching a production of 14.9 L H₂ d⁻¹, a maximum content of hydrogen of 44.2% and a cumulative production of hydrogen of 22.8 L H₂.

Canonical analysis

With the canonical analysis, the second-order models were rewritten in their canonical form, that is to say, in terms of the canonical variables that are transformations of the coded variables obtained in the models. In addition, the response surfaces were characterized, finding for each model the coordinates of the stationary points, the type of point, and the surface orientation.

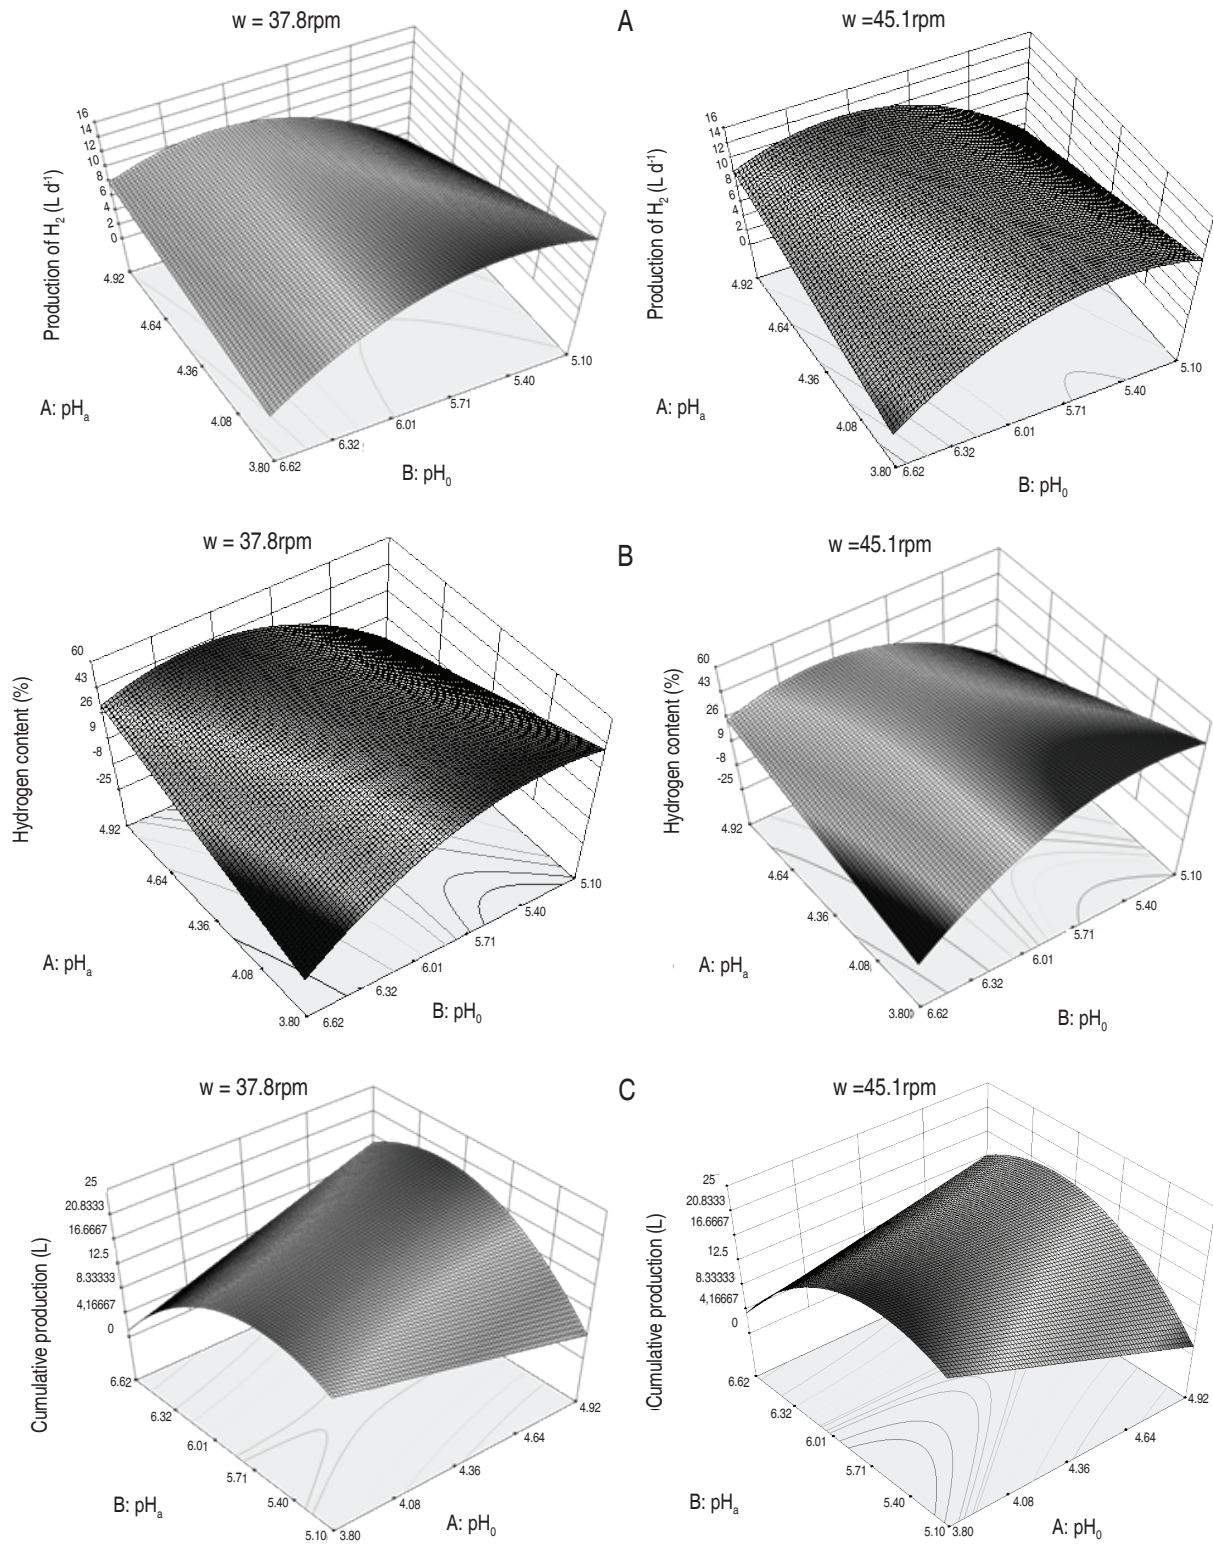


Figure 2. Response surface for the dependent variables. A. Hydrogen Production (HP); B. Maximum Content of Hydrogen (MCH); C. Cumulative Production of Hydrogen (CPH), for an acidification time (t_a) of two days and two stirring speeds, $w=37.8\text{rpm}$, $w=45.1\text{rpm}$.

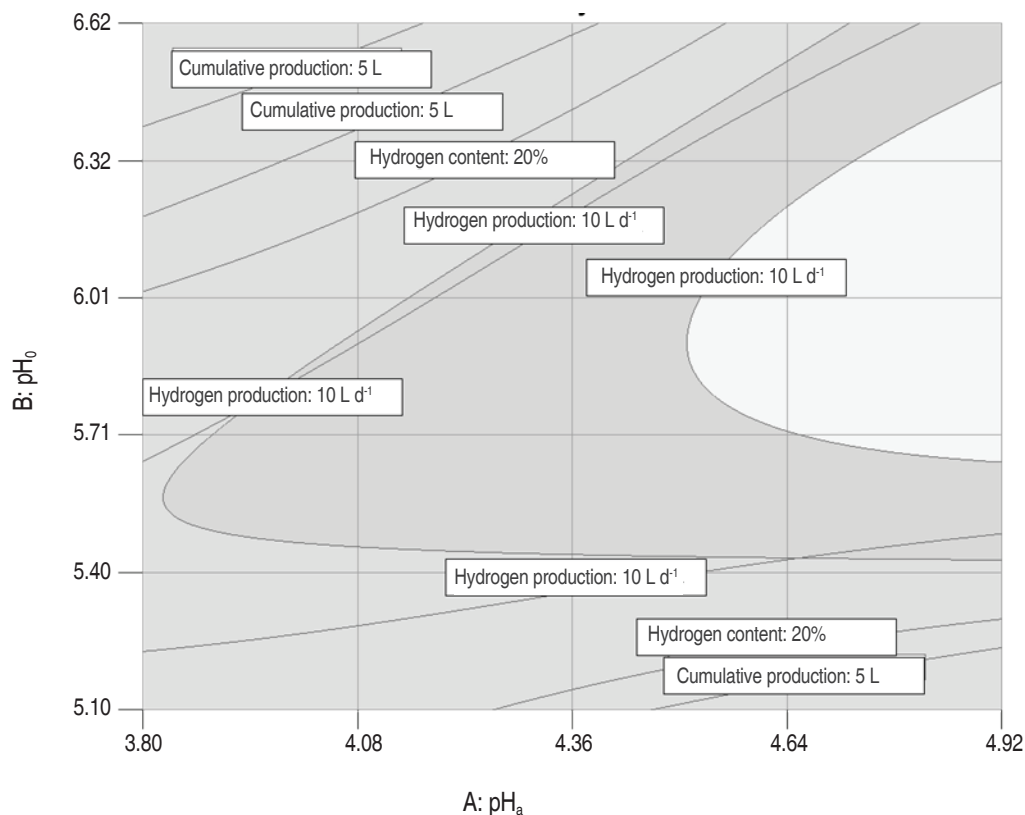


Figure 3. Superposition of the three response surfaces.

The stationary point was that in which the derivative of the model was zero. The results of the canonical analysis for the three responses show that in all cases there was a stationary point, corresponding to a saddle point. The coordinates of the stationary points and the value of the point for the hydrogen production (HP), the maximum content of hydrogen (MCH) and the cumulative production (CPH) are presented in equations 2, 3 and 4 respectively.

$$HP = (4.59; 5.8; 1.96; 37.45) = 14.49 \text{ L H}_2 \text{ d}^{-1} \quad (2)$$

$$MCH = (4.46; 5.76; 1.93; 37.97) = 43.43\% \quad (3)$$

$$CPH = (4.37; 5.78; 1.94; 37.72) = 21.38 \text{ L H}_2 \quad (4)$$

The coordinates of the stationary point for the four variables were found within the experimental region that was worked, and within the numerical values found by the numerical optimization. It was also found that the

coordinates of the stationary point for the cumulative production variable (L H_2), were close to those of the points found for the maximum content of hydrogen ($\% \text{H}_2$) and production variables ($\text{L H}_2 \text{ d}^{-1}$), that is to say that both the numerical optimization and the graph, show a common region for the optimum.

CONCLUSIONS

It was possible to obtain hydrogen from anaerobic fermentation of organic waste without using inoculum in a batch-type bioreactor, varying the acidification time, the rate stirring, the pH of acidification, and operation pH, obtaining up to $14.4 \text{ L H}_2 \text{ d}^{-1}$, hydrogen content up to 42.4%, and cumulative production of 20.4 L H_2 . The optimization of the variables studied leads to the conclusion that for the production of hydrogen the linear variables (individual effects) have no significant influence. However, the quadratic terms for operation pH and acidification time, and the interactions between pH of acidification and operation pH, and between pH

of acidification and stirring have a statistically significant effect. The response variables were adjusted to second-order polynomial models with an R^2 between 0.83 and 0.93. In addition, it was possible to optimize the three response variables obtaining a maximum of 14.9 L H₂ d⁻¹ and 49.2% of H₂ by numerical optimization, and of 22.8 L H₂ accumulated by graphical optimization.

ACKNOWLEDGEMENTS

The authors wish to thank the Universidad Nacional de Colombia for funding the research.

REFERENCES

- Chang ACC, Tu YH, Huang MH, Lay CH and Lin CY. 2011. Hydrogen production by the anaerobic fermentation from acid hydrolyzed rice straw hydrolysate. *International Journal of Hydrogen Energy* 36(21): 14280-14288. doi: 10.1016/j.ijhydene.2011.04.142
- Elbeshbishy E, Hafez H and Nakhla G. 2011. Ultrasonication for biohydrogen production from food waste. *International Journal of Hydrogen Energy* 36(4): 2896-2903. doi: 10.1016/j.ijhydene.2010.12.009
- Fernández J, Pérez M and Romero LI. 2010. Kinetics of mesophilic anaerobic digestion of the organic fraction of municipal solid waste: Influence of initial total solid concentration. *Bioresource Technology* 101(16): 6322-6328. doi: 10.1016/j.biortech.2010.03.046
- Gadhe A, Sonawane SS and Varma MN. 2014. Kinetic analysis of biohydrogen production from complex dairy wastewater under optimized condition. *International Journal of Hydrogen Energy* 39(3): 1306-1314. doi: 10.1016/j.ijhydene.2013.11.022
- Gómez X, Cuetos MJ, Prieto JI and Morán A. 2009. Bio-hydrogen production from waste fermentation: Mixing and static conditions. *Renewable Energy* 34(4): 970-975. doi: 10.1016/j.renene.2008.08.011
- Gómez-Romero J, Gonzalez-García A, Chairez I, Torres L and García-Peña EI. 2014. Selective adaptation of an anaerobic microbial community: Biohydrogen production by co-digestion of cheese whey and vegetables fruit waste. *International Journal of Hydrogen Energy* 39(24): 12541-12550. doi: 10.1016/j.ijhydene.2014.06.050
- Guo XM, Trably E, Latrille E, Carrère H and Steyer JP. 2010. Hydrogen production from agricultural waste by dark fermentation: A review. *International Journal of Hydrogen Energy* 35(19): 10660-10673. doi: 10.1016/j.ijhydene.2010.03.008
- Hernández MA, Rodríguez SM and Yves A. 2014. Use of coffee mucilage as a new substrate for hydrogen production in anaerobic co-digestion with swine manure. *Bioresource Technology* 168: 112-118. doi: 10.1016/j.biortech.2014.02.101
- Kim DH, Kim SH and Shin HS. 2009. Hydrogen fermentation of food waste without inoculum addition. *Enzyme and Microbial Technology* 45(3): 181-187. doi: 10.1016/j.enzmictec.2009.06.013
- Kim S, Han S and Shin H. 2008. Optimization of continuous hydrogen fermentation of food waste as a function of solids retention time independent of hydraulic retention time. *Process Biochemistry* 43(2): 213-218. doi: 10.1016/j.procbio.2007.11.007
- Lee MC, Seo SB, Chung JH, Kim SM, Joo YJ and Ahn DH. 2010. Gas turbine combustion performance test of hydrogen and carbon monoxide synthetic gas. *Fuel* 89(7): 1485-1491. doi: 10.1016/j.fuel.2009.10.004
- Lin CY, Wu SY, Lin PJ, Chang JS, Hung CH, Lee KS, Lay CH, Chu CY, Cheng CH, Chang AC, Wu JH, Chang FY, Yang LH, Lee CW and Lin YC. 2011. A pilot-scale high-rate biohydrogen production system with mixed microflora. *International Journal of Hydrogen Energy* 36(14): 8758-8764. doi: 10.1016/j.ijhydene.2010.07.115
- Lin J, Zuo J, Gan L, Li P, Liu F, Wang K, Chen L and Gan H. 2011. Effects of mixture ratio on anaerobic co-digestion with fruit and vegetable waste and food waste of China. *Journal of Environmental Sciences* 23(8): 1403-1408. doi: 10.1016/S1001-0742(10)60572-4
- Liu G, Zhang R, El-mashad HM and Dong R. 2009. Effect of feed to inoculum ratios on biogas yields of food and green wastes. *Bioresource Technology* 100(21): 5103-5108. doi: 10.1016/j.biortech.2009.03.081
- Luo G, Xie L, Zhou Q and Angelidaki I. 2011. Enhancement of bioenergy production from organic wastes by two-stage anaerobic hydrogen and methane production process. *Bioresource Technology* 102(18): 8700-8706. doi: 10.1016/j.biortech.2011.02.012
- Mohan VS, Mohanakrishna G, Goud RK and Sarma PN. 2009. Acidogenic fermentation of vegetable based market waste to harness biohydrogen with simultaneous stabilization. *Bioresource Technology* 100(12): 3061-3068. doi: 10.1016/j.biortech.2008.12.059
- Muñoz-Páez KM, Ríos-Leal E, Valdez-Vazquez I, Rinderknecht-Seijas N and Poggi-Varaldo HM. 2012. Re-fermentation of washed spent solids from batch hydrogenogenic fermentation for additional production of biohydrogen from the organic fraction of municipal solid waste. *Journal of Environmental Management* 95: 355-359. doi: 10.1016/j.jenvman.2011.01.017
- Nagao N, Tajima N, Kawai M, Niwa C, Kurosawa N, Matsuyama T, Yusoff FM and Toda T. 2012. Maximum organic loading rate for the single-stage wet anaerobic digestion of food waste. *Bioresource Technology* 118: 210-8. doi: 10.1016/j.biortech.2012.05.045
- Papadias DD, Ahmed S, Kumar R and Joseck F. 2009. Hydrogen quality for fuel cell vehicles – A modeling study of the sensitivity of impurity content in hydrogen to the process variables in the SMR-PSA pathway. *International Journal of Hydrogen Energy* 34(15): 6021-6035. doi: 10.1016/j.ijhydene.2009.06.026
- Park MJ, Jo JH, Park D, Lee DS and Park JM. 2010. Comprehensive study on a two-stage anaerobic digestion process for the sequential production of hydrogen and methane from cost-effective molasses. *International Journal of Hydrogen Energy* 35(12): 6194-6202. doi: 10.1016/j.ijhydene.2010.03.135
- Rangel LM. 2011. Producción de hidrógeno a partir de la Fracción Orgánica de Residuos Sólidos Urbanos (FORSU). Bachelor's Thesis in Biology. Faculty of Natural Sciences. Universidad Autónoma de Querétaro. Querétaro. 103 p.
- Redondas V, Gómez X, García S, Pevida C, Rubiera F, Morán A and Pis JJ. 2012. Hydrogen production from food wastes and gas post-treatment by CO₂ adsorption. *Waste Management* 32(1): 60-66. doi: 10.1016/j.wasman.2011.09.003
- Robledo-Narváez PN, Muñoz-Páez KM, Poggi-Varaldo HM, Ríos-Leal E, Calva-Calva G, Ortega-Clemente LA, Rinderknecht-Seijas N, Estrada-Vásquez C, Ponce-Noyola M, Salazar-Montoya JA. 2013. The influence of total solids content and initial pH on batch biohydrogen production by solid substrate fermentation of agroindustrial wastes. *Journal of Environmental Management* 128(15): 126-137. doi: 10.1016/j.jenvman.2013.04.042
- Sekoai PT and Gueguim Kana EB. 2013. A two-stage modelling and optimization of biohydrogen production from a mixture of agro-

municipal waste. *International Journal of Hydrogen Energy* 38(21): 8657-8663. doi: 10.1016/j.ijhydene.2013.04.130

Sharma Y and Li B. 2009. Optimizing hydrogen production from organic wastewater treatment in batch reactors through experimental and kinetic analysis. *International Journal of Hydrogen Energy* 34(15): 6171-6180. doi: 10.1016/j.ijhydene.2009.06.031

Shin HS, Youn JH and Kim SH. 2004. Hydrogen production from food waste in anaerobic mesophilic and thermophilic acidogenesis. *International Journal of Hydrogen Energy* 29(13): 1355-1363. doi: 10.1016/j.ijhydene.2003.09.011

Ueno Y, Tataru M, Fukui H, Makiuchi T, Goto M and Sode K. 2007. Production of hydrogen and methane from organic solid wastes by phase-separation of anaerobic process. *Bioresource Technology* 98(9): 1861-1865. doi: 10.1016/j.biortech.2006.06.017

UPME, IDEAM, COLCIENCIAS and UIS. 2009. Atlas del Potencial Energético de la Biomasa Residual en Colombia. First edition.

Universidad Industrial de Santander, Bucaramanga. 180 p.

Valdez-Vazquez I and Poggi-Valardo MH. 2009. Alkalinity and high total solids affecting H₂ production from organic solid waste by anaerobic consortia. *International Journal of Hydrogen Energy* 34(9): 3639-3646. doi: 10.1016/j.ijhydene.2009.02.039

Wang J and Wan W. 2008. Optimization of fermentative hydrogen production process by response surface methodology. *International Journal of Hydrogen Energy* 33(23): 6976-6984. doi: 10.1016/j.ijhydene.2008.08.051

Wang J and Wan W. 2009. Kinetic models for fermentative hydrogen production: A review. *International Journal of Hydrogen Energy* 34(8): 3313-3323. doi: 10.1016/j.ijhydene.2009.02.031

Zhu H, Stadnyk A, Béland M and Seto P. 2008. Co-production of hydrogen and methane from potato waste using a two-stage anaerobic digestion process. *Bioresource Technology* 99(11): 5078-5084. doi: 10.1016/j.biortech.2007.08.083

