

Promoting food security and sustainability with a transportable indirect evaporative solar pre-cooler

Promoción de la seguridad alimentaria y la sostenibilidad con un preenfriador solar evaporativo indirecto transportable

<https://doi.org/10.15446/rfnam.v77n3.110667>

Nabil Shaban Mahmoud Elkaoud^{1*}, Ragab Kassem Mahmoud¹, Hassan Hafiz Tarabye²
and Mahmoud Saad Adam²

ABSTRACT

Keywords:

Food technology
Pre-cooling
Renewable energy
Sustainability

Perhaps one of the most important goals of sustainable development for developing countries is to enhance the utilization of renewable energy sources in all sectors in general and the agricultural sector in particular. The pre-cooling process helps to maintain quality and extend the shelf life of the fruits and vegetables. The aim of this study was to fabricate an indirect evaporative solar pre-cooler (IESP) to reduce post-harvest loss for agricultural products. Tomato crop was chosen to be pre-cooled as an example of agricultural value chains. Experimental variables included three temperatures of cooling water (15, 10 and 5 °C) and two air velocities that passed through the cooling cabinet (1.5 and 2.5 m s⁻¹). The results showed that at 1.5 m s⁻¹ air velocity, the actual coefficient of performance was 19.4, 25.5 and 34.7% at cooling water temperatures 15, 10 and 5 °C, respectively. At 2.5 m s⁻¹ air velocity, the actual coefficient of performance was 23.1, 28.8 and 37.2% at cooling water temperatures 15, 10 and 5 °C, respectively. The performance of the IESP under these conditions was 15.4 °C, 91.5% RH, 0.338 TR refrigeration load and 37.2% COP_{sys}. Total energy consumption was 6.4 kWh day⁻¹. The solar pre-cooler performance proved a very feasible solution to the demands of small and medium horticultural holdings, especially in cities with a very hot climate to keep vegetables and fruits from deteriorating after harvest.

RESUMEN

Palabras clave:

Tecnología de los alimentos
Pre-enfriamiento
Energía renovable
Sostenibilidad

Quizás uno de los objetivos más importantes del desarrollo sostenible para los países en desarrollo es mejorar la utilización de fuentes de energía renovables en todos los sectores en general y en el sector agrícola en particular. El proceso de pre-enfriamiento ayuda a mantener la calidad y prolongar la vida útil de las frutas y verduras. Este estudio tuvo como objetivo fabricar un preenfriador solar evaporativo indirecto (IESP) para reducir las pérdidas posteriores a la cosecha de productos agrícolas. El cultivo de tomate fue elegido para ser preenfriado como ejemplo de cadenas de valor agrícolas. Las variables experimentales incluyeron tres temperaturas del agua de enfriamiento (15, 10 y 5 °C) y dos velocidades del aire que pasó por el gabinete de enfriamiento (1,5 y 2,5 m s⁻¹). Los resultados mostraron que a una velocidad del aire de 1,5 m s⁻¹, el coeficiente de rendimiento real fue de 19,4, 25,5 y 34,7% a temperaturas del agua de refrigeración de 15, 10 y 5 °C, respectivamente. A una velocidad del aire de 2,5 m s⁻¹, el coeficiente de rendimiento real fue de 23,1, 28,8 y 37,2% a temperaturas del agua de refrigeración de 15, 10 y 5 °C, respectivamente. El desempeño del IESP bajo estas condiciones fue de 15,4 °C, 91,5% HR, 0,338 TR carga frigorífica y 37,2% COP_{sys}. El consumo total de energía fue de 6,4 kWh día⁻¹. El rendimiento del preenfriador solar resultó ser una solución muy viable para las demandas de las pequeñas y medianas explotaciones hortícolas, especialmente en ciudades con un clima muy cálido, para evitar que las verduras y frutas se deterioren después de la cosecha.

¹Al-Azhar University, Faculty of Agricultural Engineering, Assiut, Egypt. nabilelkaoud.50@azhar.edu.eg , RagabKassem.50@azhar.edu.eg 

²Aswan University, Faculty of Agriculture and natural resources, Department of Agricultural and Bio-systems Engineering, Aswan, Egypt. tarabye@agr.aswu.edu.eg , adam123@agr.aswu.edu.eg 

*Corresponding author

Egypt is the Middle East and North Africa region's most populous country with over 92 million people and a projected 120 million by 2050 (FAO 2019). Rapid population growth, along with limited freshwater resources and arable land, is placing greater stress on Egypt's rural and urban food systems in terms of quantity and terms of changing food preferences towards high-value, more perishable fruits, and vegetables. While food needs are growing, Food Loss and Waste (FLW) in Egypt is high, especially for perishable products. Across the region, fruit and vegetable FLW is estimated to reach 45-55% of production annually (FAO 2019). Baseline data estimates for quantitative loss of over 45-50% over grapes and tomatoes, respectively, in the production, retail, and wholesale stages of the value chain alone, along with a serious loss of quality (Gustavsson et al. 2013). The pre-cooling process (Removing field heat) is considered one of the most important post-harvest processes that directly affect the quality and production. Pre-cooling reduces microbial activity, respiration rates, and vital heat. This process reduces water loss and decomposition; thus, it helps to maintain quality and extend the shelf life of the fruits (Elkaoud et al. 2024). The energy consumption for air-conditioning systems has recently been estimated to be 45% of households and commercial buildings. Moreover, the propagation of air-conditioning appliances reinforces peak electricity demand during summer. So, the consumption of electricity is a big problem for vapor compression refrigeration systems (Choudhury et al. 2013). Sorensen (2004) mentioned that in Egypt, the amount of incident solar radiation per square meter ranges between 5.0 and 8.0 kWh per day with about 3,500 sunshine hours per year. Solar energy has incredible potential to power our daily lives. The reduction in temperatures has the added advantage of decreasing the production and sensitivity of the produce to ethylene which accelerates ripening and senescence. Therefore, the quicker and more promptly the field heats, after harvest temperature is reduced, the faster these decay processes are restarted and hence the more of the initial quality can be maintained. However, with the increase the production of ethylene, enzymatic activity and higher respiration rate during ripening causes cell wall weakening and firmness loss (Senthilkumar et al. 2015). The pre-cooling system needs to consider the optimal temperature range for each fruit variety to prevent damage. Fresh fruits and vegetables need low temperatures (0 to 12.7 °C) and high relative humidities

(80 to 95%) to lower respiration and to slow metabolic and transpiration rates. By slowing these processes, water loss is reduced, and food value, quality, and energy reserves are maintained (Banerjee et al. 2021). Delay in pre-cooling of the product can cause a necessary loss of quality because field temperature can be up to 30 °C (Talbot and Chau 2002). For example, every 1-h delay in pre-cooling strawberries harvested at 54 °C will raise 10% low in shelf life (Brosnan and Sun 2001). Removing field heat from agricultural products could double shelf life (Lipinski et al. 2013). Sood and Kumari (2023) found that post-harvest losses of fruits occur due to a lack of proper techniques for harvesting, transportation, storage, and distribution. The freshness of fruits after harvest is controlled by water content, respiratory rate, ethylene production, endogenous plant hormones, and external factors such as microbial growth, temperature, relative humidity, and atmospheric compositions. Therefore, post-harvest loss of fruits can be considerably reduced and their shelf life increased by careful manipulation of these factors. Fruits can also benefit from controlled environment storage and regularization at low temperatures.

Elkaoud and Mahmoud (2022) are interested in the post-harvest operations of fruits in Egypt, especially small farms, they indicated that the total area under fruit cultivation in Egypt is about 700,854 hectares (7,008.54 million square meters). The post-harvest storage of perishable agricultural products is important to reduce the gap between demand and supply. Cold storage technologies are not popular in rural and remote areas due to the higher initial cost and the electrical energy requirement. Therefore, some low-cost technologies have been developed and, among these technologies, the evaporative cooling technology is gaining in popularity due to its simple design and lower initial cost (Kapilan and Patil 2023). Stand-alone cooling systems for the storage of perishables are needed in regions of the world lacking reliable electricity and the financial wherewithal to make sufficient investments in on-grid cold stores. To meet this need, an off-grid, batteryless solar refrigerated and evaporative cooled (SREC) was structured so that it can be self-built by smallholder farmers. Several innovative features have been incorporated including a "water battery" (a thermal reservoir) to provide nighttime cooling, a dual-use refrigeration coil to cool the thermal reservoir and interior air simultaneously, and a solar

adaptive controller to regulate power demand by refrigeration compressor based on available solar energy (Chopra et al. 2023). Vala (2022) reported that there are two principal methods of evaporative cooling: direct cooling and indirect cooling. Direct and indirect processes can also be combined. In the direct method of evaporative cooling outside unsaturated air is allowed to pass through a wet pad, due to evaporation of water air gets cooled and humidified. Whereas, in indirect method of evaporative cooling air is cooled as it flows outside the tubes of the heat exchanger in which cold water circulates. The combination of these two systems has obtained significantly enhanced cooling performance, with nearly 90% and a high energy efficiency ratio of up to 80. This system is energy efficient, environment friendly and having potential for cooling and storage of fruits and vegetables in countries where hot and dry weather prevails for most of the part. Sibanda and Workneh (2020) developed an indirect air-cooling combined with evaporative cooling (IAC + EC) system for temporary storage of fruit and vegetables (FV) to improve the shelf life of fresh produce under hot and humid climatic conditions. The study aimed to investigate the effect of IAC + EC in providing an optimum storage environment of temperature and relative humidity (RH) for the tomato fruit compared to storage under ambient conditions. The cooler efficiency varied from 88.04 to 95.6%. The results in this study are evidence that IAC + EC system can provide optimum storage conditions for FV as well as being a low-cost technology utilizable in hot and sub-humid to humid areas in sub-Saharan Africa. Accordingly, this study aimed to fabricate an indirect evaporative solar pre-cooler to reduce the post-harvest

loss for agricultural products and to enhance food security and sustainability.

MATERIALS AND METHODS

The indirect evaporative solar pre-cooler (IESP) has been fabricated and tested under an hourly solar intensity of 7 kWh m⁻² per day or maximum solar intensity for a solar declination angle of 45°. All the experiments were carried out during October and November 2022 A.D.

Agricultural product

Tomato is one of the most important horticultural crops. So, the tomato crop was chosen to be pre-cooled as an example of agricultural value chains. Fresh tomato fruits (*F1 commercial hybrid*) were obtained from a farm close to the test location on the same day of the harvest. The sample was collected in cages made of palm trees. Harvesting of the tomatoes was done before 10 o'clock in the morning. The field temperature was 27.5 °C. Fresh tomato fruits were immediately loaded in a car and transported to the test location. The sample was sorted manually and infected fruits that had mechanical damage were excluded. A sample of 50 kg was selected, packed, and kept under ambient conditions until the start of the experiment on the same day at 13:00 o'clock in the afternoon. The ambient temperature was 30.66 °C.

Description of the indirect evaporative solar pre-cooler (IESP)

Figure 1 shows a a photograph of IESP during the experiments. IESP is fabricated from two solar photovoltaic panels (2×1 m, 550 W) connected in parallel as the power source.



Figure 1. The indirect evaporative solar pre-cooler (IESP) experimental setup.

A charge controller (MPPT) of 30 Amps was used to supply IESP with the optimum voltage and current. To store the electrical energy generated by the panels, two batteries (200 Ah, 12 v) were used to operate the IESP at night. An inverter (1.5 kW, 170 ~ 280 V) was used to power the pump and suction fan. A compressor (750 W) was utilized to generate a refrigerating effect in the refrigerator that also included a condenser, an expansion valve, an evaporator and a tank cooler. The pre-cooling cycle consisted of a buffer tank (100 L), a pump (19 W, 14 L min⁻¹), a cooling cabinet (1,400×600×600 mm), a cooling coil (34 pipes with 160 fins), and a suction fan (12 m³ min⁻¹).

Essential parts of the IESP

The IESP consists of a solar energy system (Power source), refrigerator, and pre-cooling cycle.

Solar energy system (power source)

The power source included two photovoltaic panels, a solar charge controller, a battery, an inverter, and a control system. The panels were connected in parallel. For solar arrays to produce maximum power output, they must be at an optimal tilt angle to trap maximum radiation (Tripathy et al. 2017). According to Morales and Busch (2010), the optimum tilt angle correlates with latitude and is considered equal to the latitude or latitude ±15° (+ for winter and – for summer). This system is designed to operate all year round, so the tilt angle is set to be 30° to correspond to the latitude of the test location.

Control system

This system is programmed to control the operation of the effective devices (Pump + Compressor) of IESP according to the temperature of either the buffer tank water or the cooling cabinet. The electronic system controls the operation of the hydraulic cycle of the pre-cooling mechanism. It consisted of an Arduino Uno R3, a waterproof temperature sensor, and a relay.

The buffer tank

The buffer tank is considered one of the most important parts of the cooling system. It contains the refrigerant fluid that is cooled directly by the evaporator (The evaporator of the refrigeration cycle that operates with Freon). The tank is made of a thick material to resist rust and low coefficient of thermal conductivity so as not to lose the heat stored in the fluid. It is isolated from the outside by a

layer of glass wool with a thickness of 40 mm to maintain the temperatures inside the tank. The tank capacity was 100 L. The process of transferring the cooling water from the tank to the cooling coil is done by a pump. The water returns to the tank to equalize the degree of the cooling medium in the tank that (operates inside the direct cooling circuit).

The cooling cabinet

The size of the cooling cabinet was chosen to accommodate 50 kg of tomatoes to carry out the experiments. However, it is possible to re-size the room to suit commercial purposes. The dimensions of the cabinet were 1,400×600×600 mm. The side walls and bottom of the cooling cabinet were insulated by two insulating materials, namely a carbon steel layer 2 mm thick and glass wool 50 mm thick.

Experimental setup

The water flow rate was chosen at a limit that does not give temperatures less than required for pre-cooling. All experiments were carried out using a 6 L min⁻¹ water flow rate of cooling water that passes through the cooling coil. The time for each experiment was 4 h and temperature and humidity were recorded every 20 min. The initial temperature of the cabinet was 24 °C. As for the humidity, it was monitored after placing tomatoes in the cabinet. Variables of experiments are as follows: I) The temperature of the cooling water: Experiments were carried out using three temperatures of cooling water 15, 10 and 5 °C. II) Air velocity: IESP was tested under two air velocities that passed through cooling cabinets 1.5 and 2.5 m s⁻¹.

Measurements

Refrigeration load and Heat of respiration

The heat of respiration was calculated according to (Ashrae 2002) by the following Equation (1):

$$Q_{res.} = m \times h \times \frac{1}{3,600 \times n} \quad (1)$$

Where “Qres” is the Heat of respiration (W), “m” is the mass of tomatoes to be cooled (kg), “h” is the rate of respiration (J·kg⁻¹), and “n” is the operation time (hours).

Field heat

According to Sibanda (2019), field heat is the heat removed from freshly harvested tomatoes by introducing them into the cold store by reducing the field temperature

of the tomatoes to the desired storage temperature. Field heat in the case of this study, therefore, is the amount of heat removed from the tomatoes as they cool from initial harvest temperature to pre-cooling temperature. The mass of the tomatoes is 50 kg, and the operating time is assumed at 4 h. The specific heat of tomatoes is $3.985 \text{ kJ} \cdot (\text{kg } ^\circ\text{C})^{-1}$, according to Fellows (2000). The field heat calculated from the Equation (2):

$$Q_{fh} = \frac{m \times c_p (T_2 - T_1)}{3,600 \times n} \quad (2)$$

Where “ Q_{fh} ” is the field heat (kW), “ m ” is the mass of tomatoes to be cooled (kg), “ C_p ” is the specific heat of tomatoes ($\text{kJ} \cdot (\text{kg } ^\circ\text{C})^{-1}$), “ T_2 ” is the pre-cooling temperature ($^\circ\text{C}$) of tomatoes and “ T_1 ” is the initial tomatoes in crates temperature ($^\circ\text{C}$).

Heat leakages

There is heat transfer because of leakages between the outside air and inside air through the walls and the roof as a result of the temperature gradient between the outside and inside temperature and is computed according to Ashrae (2002) by the following Equation (3):

$$Q_L = U_f \times A_f \times (T_a - T_c) \quad (3)$$

Where “ Q_L ” is the heat leakages (W), “ U_f ” is the overall heat coefficient = $0.936 \text{ W} \cdot \text{m}^{-2} \cdot ^\circ\text{C}^{-1}$, “ A_f ” is the surface area of the cooling cabinet (4.08 m^2), “ T_a ” is the ambient

temperature ($^\circ\text{C}$) and “ T_c ” is the temperature of material inside the refrigerator ($^\circ\text{C}$). So, the refrigeration load was estimated by the following Equation (4):

$$\text{Refrigeration load} = (\text{Heat of respiration} + \text{Field heat} + \text{Heat leakages}) \times 1.1 \quad (4)$$

Where “1.1” is to compensate for the heat losses that may result from the frequent opening of the cooling cabinet door correspond to Thompson (2004).

Actual coefficient of performance

The solar refrigerator’s efficiency is measured as the cooling capacity of solar energy absorbed by the solar collector (Mansoori and Patel 1979), following Equation (5):

$$(\text{COP}_{\text{cyc}})_{\text{actual}} = \frac{Q_{\text{Ref load}}}{P_{\text{Total}}} \quad (5)$$

Where P_{Total} is the total energy consumption (Refrigerator + Pump + Suction fan).

RESULTS AND DISCUSSION

Cooling cabinet temperature and humidity

At 1.5 m s^{-1} air velocity:

It is noticeable that the cabinet temperature decreased by decreasing the cooling water temperature from 15 to 5°C at the same time, the cabinet humidity increased by decreasing the cooling water temperature as well. Figure 2 shows the effect of operating duration on temperature and humidity using 15°C cooling water temperature.

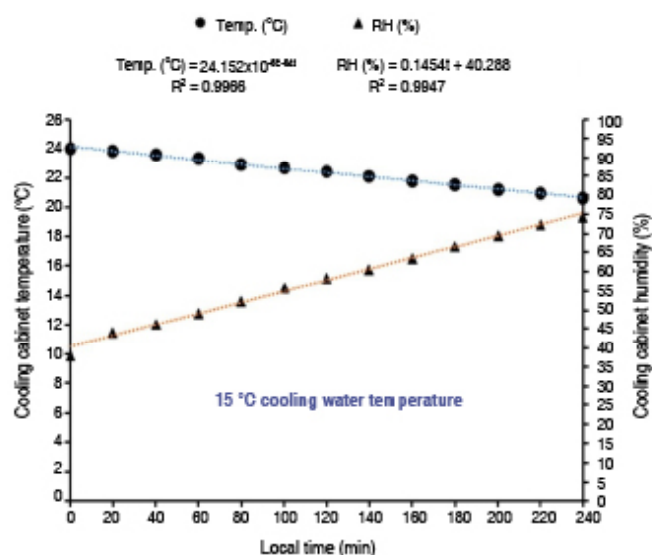


Figure 2. Effect of operating duration on temperature and humidity using 15°C cooling water temperature.

These results indicated that the cooling cabinet temperature dropped from 24 to 20 °C while the humidity (RH) inside the cooling cabinet increased from 38.72 to 75.3% during 4 h of operation using 15 °C cooling water temperatures. Under the same experimental conditions, the temperature and humidity can be estimated from the following Equations (6) and (7):

$$\text{Cabinet temperature (}^{\circ}\text{C)} = 24.152 \times 10^{-6} E^{-0.04t} \quad (6)$$

$$\text{Cabinet humidity (\%)} = 0.1454t + 40.288 \quad (7)$$

These relationships indicate that it is possible to calculate the temperature and relative humidity (RH) inside the cabinet by knowing time (t) and the coefficient of correlation is very high and closer to 1 ($R^2=0.99$). So, the correlation between temperature and relative humidity and between the local time is a positive strong correlation as shown in Figure (2).

Figure 3 shows the effect of operating duration on temperature and humidity using 10 °C cooling water temperature.

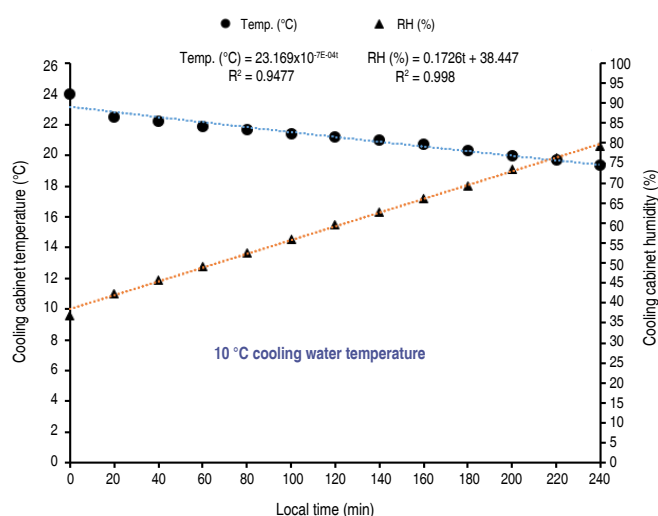


Figure 3. Effect of operating duration on temperature and humidity using 10 °C cooling water temperature.

The results showed that the cooling cabinet temperature dropped from 24 to 18.3 °C while the humidity inside the cooling cabinet increased from 37.52 to 81.2% during 4 h of operation with load using 10 °C cooling water temperatures. Under the same experimental conditions, the temperature and humidity can be estimated from the following Equations (8) and (9):

$$\text{Cabinet temperature (}^{\circ}\text{C)} = 22.788 \times 10^{-1} E^{-0.03t} \quad (8)$$

$$\text{Cabinet humidity (\%)} = 0.1754 + 39.256 \quad (9)$$

These relationships also indicate that it is possible to calculate the temperature and relative humidity (RH) inside the cabinet by knowing time (t) and the coefficient of correlation is very high and closer to 1 ($R^2=0.9$).

Figure 4 shows the effect of operating duration on temperature and humidity using 5 °C cooling water temperature.

These results indicated that the cooling cabinet temperature dropped from 24 to 16.1 °C while the humidity inside the cooling cabinet increased from 39.9 to 89.8% during 4 h of operation with load using 5 °C cooling water temperatures. Under the same experimental conditions, the temperature and humidity can be estimated from the following Equations (10) and (11):

$$\text{Cabinet temperature (}^{\circ}\text{C)} = 21.205 \times 10^{-0.001t} \quad (10)$$

$$\text{Cabinet humidity (\%)} = 0.2118t + 41.481 \quad (11)$$

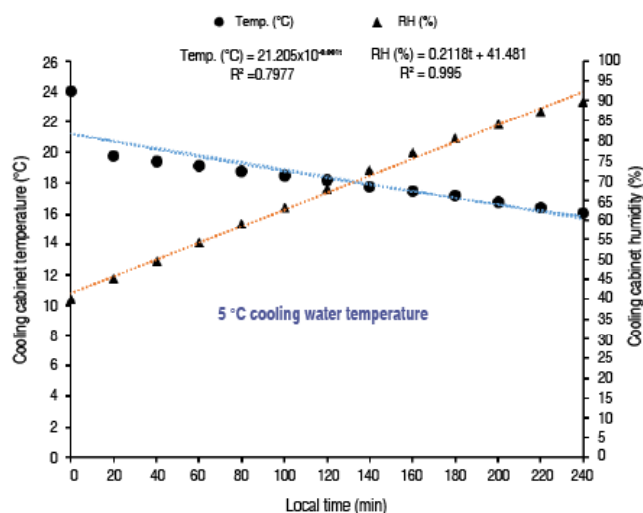


Figure 4. Effect of operating duration on temperature and humidity using 5 °C cooling water temperature.

At 2.5 m s⁻¹ air velocity:

Figure 5 shows the effect of operating duration on temperature and humidity using 15 °C cooling water temperature.

during 4 h of operation with a load using 15 °C cooling water temperatures. Under the same experimental conditions, the temperature and humidity can be estimated from the following Equations (12) and (13):

These results indicated that the cooling cabinet temperature dropped from 24 to 20 °C while the humidity inside the cooling cabinet increased from 38.72 to 75.3%

$$\text{Cabinet temperature (}^{\circ}\text{C)} = 23.816 \times 10^{-7} E^{-0.4t} \quad (12)$$

$$\text{Cabinet humidity (\%)} = 0.1477t + 40.975 \quad (13)$$

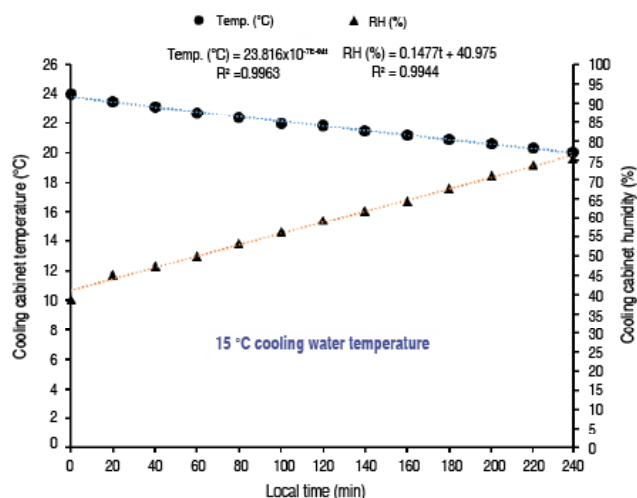


Figure 5. Effect of operating duration on temperature and humidity using 15 °C cooling water temperature.

These relationships also indicate that it is possible to calculate the temperature and relative humidity (RH) inside the cabinet by knowing time (t) and the coefficient of correlation is very high and closer to 1

($R^2=0.99$). So, the correlation between temperature and relative humidity and between the local time is a positive strong correlation as shown in Figure (5).

Figure 6 shows the effect of operating duration on temperature and humidity using 10 °C cooling water temperature.

These results indicated that the cooling cabinet temperature dropped from 24 to 18.3 °C while the humidity inside the cooling cabinet increased from 37.52 to 81.2% during

4 h of operation with load using 10 °C cooling water temperatures. Under the same experimental conditions, the temperature and humidity can be estimated from the following Equations (14) and (15):

$$\text{Cabinet temperature (}^{\circ}\text{C)} = 22.788 \times 10^{-1E-03t} \quad (14)$$

$$\text{Cabinet humidity (\%)} = 0.1754t + 39.256 \quad (15)$$

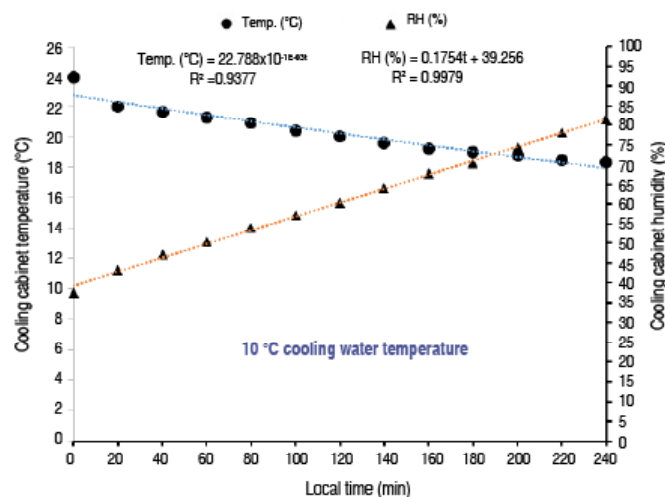


Figure 6. Effect of operating duration on temperature and humidity using 10 °C cooling water temperature.

Figure 7 shows the effect of operating duration on temperature and humidity using 5 °C cooling water temperature. These results indicated that the cooling cabinet temperature dropped from 24 to 15.4 °C while the humidity inside the cooling cabinet increased from 40 to 91.5% during 4 h of operation with load using 5 °C cooling water temperatures.

Under the same experimental conditions, the temperature and humidity can be estimated from the following Equations (16) and (17):

$$\text{Cabinet temperature (}^{\circ}\text{C)} = 20.9 \times 10^{-0.001t} \quad (16)$$

$$\text{Cabinet humidity (\%)} = 0.2162t + 41.851 \quad (17)$$

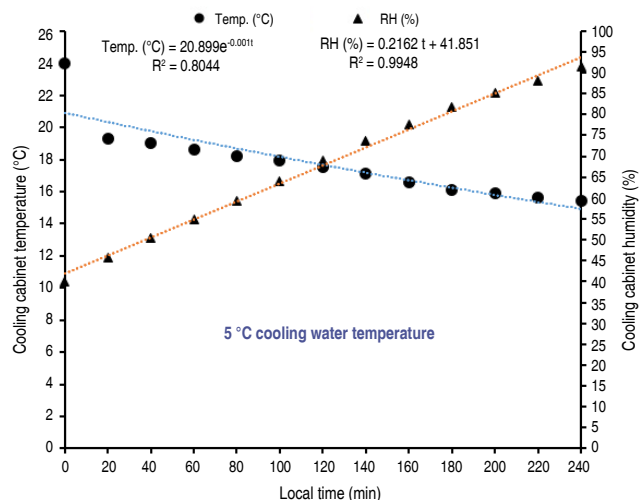


Figure 7. Effect of operating duration on temperature and humidity using 5 °C cooling water temperature.

From the results, it was found that the lowest temperature was 15.4 °C at the same time the highest relative humidity was 91.5% at 5 °C cooling water temperature.

From the previous results, it is notable that 5 °C cooling water temperature is considered optimal as it achieved the lowest temperature (16.1 and 15.4 °C) and, at the same time, it achieved the highest humidity (89.8 and 91.5%) of the cooling cabinet during 4 h of operation with load at air velocity 1.5 and 2.5 m s⁻¹, respectively. These climatic conditions are suitable for the

pre-cooling process and correspond to the recommended temperature and humidity for tomato storage (From 12 to 15 °C and RH>85%), according to Beckles (2012).

Refrigeration load

Heat of respiration

According to Suslow and Cantwell (2009), the respiration rates of tomatoes change with the change in storage temperatures, so the respiration heat was calculated according to Table 1.

Table 1. Respiration heat using the recorded temperatures under the experimental variables.

Experimental variables		Pre-cooling temperature of tomatoes (°C)	Respiration rates* (J·kg ⁻¹)	Heat of respiration (kW)
Air velocities (m s ⁻¹)	Cooling water temperatures (°C)			
1.5	15	20.6	450	0.00160
	10	19.4	406	0.00141
	5	16.1	342	0.00120
2.5	15	20.0	427	0.00150
	10	18.3	384	0.00133
	5	15.4	320	0.00111

*(Suslow and Cantwell 2009).

Field heat

Field heat was calculated using the recorded temperatures

under the variables of the experiments, as shown in Table 2.

Table 2. Field heat using the recorded temperatures under the experimental variables.

Experimental variables		(T ₂) Pre-cooling temperature of tomatoes (°C)	(T ₁) Initial tomatoes in crates temperature (°C)	The field heat (kW)
Air velocities (m s ⁻¹)	Cooling water temperatures (°C)			
1.5	15	20.6	28.50	0.110
	10	19.4	30.77	0.141
	5	16.1	30.35	0.197
2.5	15	20.0	29.47	0.131
	10	18.3	30.03	0.162
	5	15.4	30.66	0.211

Heat leakage

The heat leakage was calculated using the recorded

temperatures under the experimental variables as shown in Table 3.

Table 3. Heat leakage using the recorded temperatures under the experimental variables.

Experimental variables		(T ₂) Pre-cooling temperature of tomatoes (°C)	(T ₁) Initial tomatoes in crates temperature (°C)	The heat leakage (kW)
Air velocities (m s ⁻¹)	Cooling water temperatures (°C)			
1.5	15	20.6	28.50	0.030
	10	19.4	30.77	0.043
	5	16.1	30.35	0.054
2.5	15	20.0	29.47	0.036
	10	18.3	30.03	0.045
	5	15.4	30.66	0.058

From the previous results, the refrigeration load was calculated by the following Equation (18), as shown in Table 4.

$$\text{Refrigeration load} = (\text{Heat of respiration} + \text{Field heat} + \text{Heat leakages}) \times 1.1) \times 4 \text{ operation time} \quad (18)$$

Table 4. The refrigeration load under the experimental variables.

Experimental variables					The refrigeration load	
Air velocities (m s ⁻¹)	Cooling water temperatures (°C)	Heat of respiration (kW)	Field heat (kW)	The heat leakage (kW)	(kW)	(Ton R.)
1.5	15	0.00160	0.110	0.030	0.620	0.176
	10	0.00141	0.141	0.043	0.815	0.232
	5	0.00120	0.197	0.054	1.110	0.316
2.5	15	0.00150	0.131	0.036	0.740	0.210
	10	0.00133	0.162	0.045	0.920	0.260
	5	0.00111	0.211	0.058	1.190	0.338

Effect of Air velocity and cooling water temperatures on refrigeration load

The results indicated that the refrigeration load increased by decreasing the water temperature from 15 to 5 °C; it also, increased by increasing air velocity from 1.5 to 2.5 m s⁻¹. At 1.5 m s⁻¹ air velocity, the refrigeration load was 0.176, 0.232, and 0.316 TR at cooling water temperatures of 15, 10, and 5 °C, respectively. At 2.5 m s⁻¹ air velocity, the refrigeration load were 0.21, 0.26, and 0.338 TR at cooling water temperatures 15, 10, and 5 °C, respectively.

Actual coefficient of performance (COP_{cyc})

A summary of the refrigeration load and the actual coefficient of performance under the experimental variables is shown in Table 5.

Effect of air velocity and cooling water temperatures on COP_{cyc}

The actual coefficient of performance increased by decreasing the water temperature from 15 to 5 °C and also, increased by increasing air velocity from 1.5 to 2.5 m s⁻¹.

At 1.5 m s⁻¹ air velocity, the actual coefficient of performance were 19.4, 25.5, and 34.7% at cooling water temperatures 15, 10, and 5 °C, respectively. At 2.5 m s⁻¹ air velocity, the actual coefficient of performance was 23.1, 28.8 and 37.2% at cooling water temperatures 15, 10, and 5 °C, respectively. The use of 5 °C cooling water temperature has achieved the highest COP_{cyc} at 1.5 and 2.5 m s⁻¹ air velocities.

Table 5. A summary of the refrigeration load and the actual coefficient of performance under the experimental variables.

Experimental variables			The refrigeration load		
Air velocities (m s ⁻¹)	Cooling water temperatures (°C)	Total energy consumption (kW)	(kW)	(Ton R.)	COP _{sys} (%)
1.5	15	3.2	0.620	0.176	19.4
	10		0.815	0.232	25.5
	5		1.110	0.316	34.7
	15		0.740	0.210	23.1
2.5	10	3.2	0.920	0.260	28.8
	5		1.190	0.338	37.2

CONCLUSION

To achieve sustainable development of the agricultural sector, renewable energy should be relied upon to operate electrical energy-consuming systems, especially in developing countries. In this study, an IESP was successfully fabricated and tested to promote food security. It is completely powered by solar energy and is compact in size and transportable. The IESP performance proved a very feasible solution to the demands of small and medium horticultural holdings. From the experimental results, it can be observed that 5 °C cooling water temperature is considered optimal as it achieved the lowest temperature and at the same time it achieved the highest humidity. Based on the findings of this study, these climatic conditions are suitable for the pre-cooling process and correspond to the recommended temperature and humidity for tomato storage. So, the pre-cooling process is considered one of the most important techniques for handling horticultural crops to reduce post-harvest losses. However, choosing the appropriate pre-cooling technology is crucial to ensuring economical operation and sustainability.

REFERENCES

Ashrae Handbook (2002) Ashrae transactions. Atlanta: American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc.

Banerjee S, Halder S, Skanda Kumar BN and Jayeeta Mitra (2021) Chapter 8 - Storage of fruits and vegetables: an overview. Packaging and storage of fruits and vegetables. 1st edition, New York, 157-181. <https://doi.org/10.1201/9781003161165>

Beckles DM (2012) Factors affecting the postharvest soluble solids and sugar content of tomato (*Solanum lycopersicum* L.) fruit. Postharvest Biology and Technology 63(1): 129-140. <https://doi.org/10.1016/j.postharvbio.2011.05.016>

Brosnan T and Sun DW (2001) Precooling techniques and applications for horticultural products—a review. International Journal of Refrigeration, 24(2): 154-170. [https://doi.org/10.1016/S0140-7007\(00\)00017-7](https://doi.org/10.1016/S0140-7007(00)00017-7)

Chopra S, Müller N, Dhingra D, Pillai P, Kaushik T, Kumar A and Beaudry R (2023) Design and performance of solar-refrigerated, evaporatively-cooled structure for off-grid storage of perishables. Postharvest Biology and Technology, 197, 112212. <https://doi.org/10.1016/j.postharvbio.2022.112212>

Choudhury B, Saha BB, Chatterjee PK and Sarkar JP (2013) An overview of developments in adsorption refrigeration systems towards a sustainable way of cooling. Applied Energy 104: 554-567 <https://doi.org/10.1016/j.apenergy.2012.11.042>

Elkaoud NSM and Mahmoud RK (2022) Design and implementation of sequential fruit size sorting machine. Brazilian Journal of Agricultural and Environmental Engineering 26 (10): 722-728. <http://doi.org/10.1590/1807-1929/agriambi.v26n10p722-728>

Elkaoud NSM, Mahmoud RK, Tarabye HH and Adam MS (2024) Optimal design of a solar precooling system for small-scale producers. CIGR Journal 26(1): 148-161. <https://cigrjournal.org/index.php/Ejournal/article/view/9063/4189>

FAO (2019) Food and Agriculture Organization, Food loss and waste reduction and value chain development for food security in Egypt and Tunisia - Egypt Component. <https://www.fao.org/egypt/programmes-and-projects/food-loss-waste-reduction/fr/>

Fellows PJ (2000) Principles and practice. Food processing technology, 2nd edition. Ed. Ellis Horwood, Chichester, Woodhead Publishing Limited and CRC Press LLC, 369-380.

Gustavsson J, Cederberg C, Sonesson ULF and Emanuelsson A (2013) The methodology of the FAO study: "Global Food Losses and Food Waste—extent, causes and prevention"—FAO, 2011. <https://www.diva-portal.org/smash/get/diva2:944159/FULLTEXT01.pdf>

Kapilan N and Patil VK (2023) Development and evaluation of a low-cost evaporative cooling system for agricultural product storage. Research in Agricultural Engineering 69(1): 48–53. <https://doi.org/10.17221/41/2021-RAE>

Lipinski B, Hanson C, Waite R, Searchinger T and Lomax J (2013) Creating a Sustainable Food Future, Installment Two:

reducing food loss and waste. World Resources Institute. <https://www.wri.org/research/reducing-food-loss-and-waste>

Mansoori A and Patel V (1979) Thermodynamic basis for the choice of working fluids for solar absorption cooling systems. *Solar Energy* 22(6): 483-491. [https://doi.org/10.1016/0038-092X\(79\)90020-3](https://doi.org/10.1016/0038-092X(79)90020-3)

Morales TD and Busch J (2010) Design of small photovoltaic (PV) solar-powered water pump systems. United States Department of Agriculture (USDA), Natural Resources Conservation Service (NRCS), Technical Note 28: 1-64. https://www.aeei.bse.vt.edu/wp-content/uploads/2014/05/nrcs142p2_046471.pdf

Senthilkumar S, Vijayakumar RM and Kumar S (2015) Advances in precooling techniques and their implications in horticulture sector: A Review. *International Journal of Environmental & Agriculture Research (IJOEAR)* 1(1): 24-30. https://ijoeear.com/assets/articles_menuscripts/file/IJOEAR-MAY-2015-5.pdf

Sibanda S (2019) Development of a solar-powered indirect air cooling combined with direct evaporative cooling system for storage of fruits and vegetables in Sub-Saharan Africa (Doctoral dissertation). <http://doi.org/10.13140/RG.2.2.13604.60808>

Sibanda S and Workneh TS (2020) Performance evaluation of an indirect air cooling system combined with evaporative cooling. *Heliyon* 6(1). <https://doi.org/10.1016/j.heliyon.2020.e03286>

Sood M and Kumari D (2023) Hybridization: Importance, techniques and consequences; recent trends in agriculture. Chapter

4 - Post-harvest technology for fruits. *Recent Trends in Agriculture* 53.

Sorensen B (2004) *Renewable Energy Its physics, engineering, use, environmental impacts, economy and planning aspects*, 3rd. Elsevier Academic Press, Roskilde Univ. Energy & Environment Group, Ins, 2.

Suslow T and Cantwell M (2009) *Tomato: recommendations for maintaining postharvest quality*. Produce Facts. Davis: Postharvest Technology Research & Information Center. <https://postharvest.ucdavis.edu/produce-facts-sheets/tomato>

Talbot MT and Chau KV (2002) *Precooling strawberries*. Gainesville: IFAS, Univ. of Florida, 8p. (Circular 942). <https://ufdcimages.uflib.ufl.edu/IR/00/00/45/22/00001/AE13600.pdf>

Thompson JF (2004) *The commercial storage of fruits, vegetables and florist and nursery stocks*. A revised draft of Agriculture Handbook No. 66, USDA, ARS.

Tripathy M, Yadav S, Sadhu PK and Panda SK (2017) Determination of optimum tilt angle and accurate insolation of BIPV panel influenced by adverse effect of shadow. *Renewable Energy* 104: 211-223. <https://doi.org/10.1016/j.renene.2016.12.034>

Vala KV (2022) Environment friendly indirect-direct type evaporative cooling technology: A review. *International Journal of Environment and Climate Change* 12(10): 494-503. <https://doi.org/10.9734/ijec/2022/v12i1030823>